

Nortel Communication Server 1000

Communication Server 1000 Fault Management — SNMP

Release: 7.0
Document Revision: 04.01

www.nortel.com

NN43001-719

Nortel Communication Server 1000
Release: 7.0
Publication: NN43001-719
Document release date: 4 June 2010

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

While the information in this document is believed to be accurate and reliable, except as otherwise expressly agreed to in writing NORTEL PROVIDES THIS DOCUMENT "AS IS" WITHOUT WARRANTY OR CONDITION OF ANY KIND, EITHER EXPRESS OR IMPLIED. The information and/or products described in this document are subject to change without notice.

Nortel, Nortel Networks, the Nortel logo, and the Globemark are trademarks of Nortel Networks.

All other trademarks are the property of their respective owners.

Contents

New in this release 7
Features 7
SNMP Profile Manager for High Scalability systems 7
Other changes 7
Revision history 7

How to get help 11
Finding the latest updates on the Nortel Web site 11
Getting help from the Nortel Web site 11
Getting help over the telephone from a Nortel Solutions Center 11
Getting help from a specialist by using an Express Routing Code 12
Getting help through a Nortel distributor or reseller 12

Introduction 13
Subject 13
Applicable systems 14
Conventions 14
Related information 15

SNMP system capabilities 17
Contents 17
SNMP terminology 17
Overview 19
SNMP capabilities 21
Logical architecture of fault management 22
SNMP profiles 22
SNMP Profile Manager 23
System SNMP architecture 25
Call Server architecture 25
Voice Gateway Media Card and Gateway Controller architecture 28
Linux SNMP architecture 30
Media Application Server SNMP architecture 31
Connections 32
Access to SNMP components 32
Sample configuration 34

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Call Server and IP Telephony device connections 35
Geographic Redundancy SNMP configuration 35
SNMP and ISSS/IPsec 35

Configuring SNMP **37**
Contents 37
Overview 38
Configuring SNMP on the Call Server using the CLI 39
Configuring target IP address 40
Verifying the SNMP configuration 41
Overview of Alarm Management on the Call Server 42
Event Collector 42
Event Server 42
Community strings 45
SNMP CLI commands 47
SNMP configuration using SNMP Profile Manager 55
Adding a new MIBACCESS SNMP profile 55
Adding a new SYSINFO SNMP profile 56
Adding a new ALARM SNMP profile 58
Editing a MIBACCESS SNMP profile 59
Editing a SYSINFO SNMP profile 60
Editing an ALARM SNMP profile 61
Deleting a SNMP profile 63
SNMP Profile Distribution 63
Assigning SNMP profiles to elements 65
SNMP configuration using Element Manager 66
Configuring SNMP on the Call Server 67

Traps **69**
Contents 69
Overview 69
Trap MIBs 70
Standard traps 70
Trap description 70
Trap format 70
Trap handling process 71
IP Telephony traps 72
ITG and ITS trap format 72
Viewing system error messages 73
Test trap tool for Linux Base 73
Corrective actions 75
Troubleshooting traps 75
Potential missing alarms 75

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

MIBs 77
Contents 77
Overview 77
ASN.1 78
OID queries 84
Variable binding 84
Supported MIBs 84
Entity group MIB 98
Accessing MIBs 99
Trap handling approaches 100
Directly accepting traps with Network Management Systems and HP OpenView 100

Administration 101
Contents 101
EDT and EPT 101
Backup and restore 102
LD 43 102
LD 143 103

Configuring SNMP alarms in HP OpenView NNM 105
Contents 105
Overview 105
Trap MIBs 105
Alarms 105
Using HP OpenView to accept traps 106
Configuring events 106
Alarm logging and viewing 108

Common Trap Structure 109
Contents 109
Overview 109
Trap severities 109
Variable bindings 110

Common Trap MIB 115

List of terms 123

Index 125

Procedures
Verifying the SNMP configuration 41
Downloading the MIBs from the Nortel Web site 99
Configuring events 106

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

New in this release

The following sections detail what's new in *Communication Server 1000 Fault Management — SNMP* (NN43001-719)for Communications Server 1000 Release 7.0.

- "Features" (page 7)
- "Other changes" (page 7)

Features

This section describes features that are new for Communication Server 1000 Release 7.0.

SNMP Profile Manager for High Scalability systems

SNMP Profile Manager for High Scalability systems allows you to view all elements registered to the UCM security domain in a tree view. You can select up to 500 individual or multiple elements for system-wide profile management and distribution.

Other changes

See the following sections for information about changes that are not feature-related:

Revision history

June 2010	Standard 04.01. This document is up-issued to support Communication Server 1000 Release 7.0.
May 2009	Standard 03.02. This document is up-issued to include changes to technical content.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

May 2009	Standard 03.01. This document is up-issued to support Communication Server 1000 Release 6.0. This NTP may contain information on or refer to products and naming conventions that are not supported in this release. This information is included for legacy purposes and convenience only. This includes but is not limited to items, such as: SSC; ISP 1100; ITG Pentium cards; and Media Cards running certain IP Line applications.
February 2008	Standard 02.03. This document is up-issued to include new and altered SNMP CLI commands.
December 2007	Standard 02.02. This document is up-issued to support Communication Server 1000 Release 5.5. This document provides a description of rated call capacity ("hrProcessorLoad, page 74" (page 93)) and a list of space utilization thresholds ("Space utilization thresholds, page 72 " (page 93)).
December 2007	Standard 02.01. This document is up-issued to support Communication Server 1000 Release 5.5.
September 2007	Standard 01.04. This document is up-issued to document how to setup SNMP from a MGC card.
July 2007	Standard 01.03. This document is up-issued for changes to QOS MIB Access setup.
June 2007	Standard 01.02. This document is up-issued to remove the Nortel Networks Confidential statement.
May 2007	Standard 01.01. This document is issued to support Nortel Communication Server 1000 Release 5.0. This document is renamed *Communication Server 1000 Fault Management — SNMP* (NN43001-719) and contains information previously contained in the following legacy document, now retired: *Simple Network Management Protocol: Description and Maintenance* (553-3001-519). In addition, all references to adminGroup2 and adminGroup3 community strings in the section "Community strings" (page 45) are changed to admingroup2 and admingroup3.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

	to reverse previous changes. The syntax was correct initially and should have remained. The admingroup syntax is all lower case.
July 2006	Standard 4.00. This document is up-issued for changes in technical content. All references to admingroup2 and admingroup3 community strings in the section "Community strings" (page 45) are changed to adminGroup2 and adminGroup3. The community strings are case sensitive and do not work if they are entered in all lower case. The syntax for Community Name and User group are reversed in Call server default community strings and Signaling Server, Voice Gateway media Card, and MGC default community strings. The community strings are in brackets and not the User Group.
January 2006	Standard 3.00. This document is up-issued with changes to configure SNMP trap destinations. Configuring the required ELAN routing entries and the SNMP trap destination subnet mask is updated to 255.255.255.255.
August 2005	Standard 2.00. This document is up-issued to support Nortel Communication Server 1000 Release 4.5.
September 2004	Standard 1.00. This document is issued to support Simple Network Management Protocol (SNMP) capabilities for Nortel Networks Communication Server 1000 Release 4.0 and Meridian 1 systems.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

How to get help

This chapter explains how to get help for Nortel products and services.

Finding the latest updates on the Nortel Web site

The content of this documentation is current at the time the product is released. To check for updates to the latest documentation for Communication Server (CS) 1000, go to www.nortel.com and navigate to the Technical Documentation page for Communication Server 1000.

Getting help from the Nortel Web site

The best way to get technical support for Nortel products is from the Nortel Technical Support Web site:
www.nortel.com/support

This site provides quick access to software, documentation, bulletins, and tools to address issues with Nortel products. From this site, you can:

- download software, documentation, and product bulletins
- search the Technical Support Web site and the Nortel Knowledge Base for answers to technical issues
- sign up for automatic notification of new software and documentation for Nortel equipment
- open and manage technical support cases

Getting help over the telephone from a Nortel Solutions Center

If you do not find the information you require on the Nortel Technical Support Web site, and you have a Nortel support contract, you can also get help over the telephone from a Nortel Solutions Center.

In North America, call 1-800-4NORTEL (1-800-466-7835). Outside North America, go to the following Web site to obtain the telephone number for your region:
www.nortel.com/callus

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Getting help from a specialist by using an Express Routing Code

To access some Nortel Technical Solutions Centers, you can use an Express Routing Code (ERC) to quickly route your call to a specialist in your Nortel product or service. To locate the ERC for your product or service, go to:
www.nortel.com/erc

Getting help through a Nortel distributor or reseller

If you purchased a service contract for your Nortel product from a distributor or authorized reseller, contact the technical support staff for that distributor or reseller.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Introduction

This document is a global document. Contact your system supplier or your Nortel representative to verify that the hardware and software described are supported in your area.

ATTENTION
Setup and use of Simple Network Management Protocol (SNMP) and Network Management Systems (NMS) for alarm monitoring requires knowledgeable technical staff with appropriate experience. For most Network Management Systems, it is necessary to import the Nortel Communications Server 1000 or Meridian 1 Management Information Bases (MIB) and perform configuration changes to support the system alarms.

Some systems require limited application work using the development kit provided with the Network Management System. Contact the Network Management System provider if assistance is required.

Subject

This document describes the Simple Network Management Protocol capabilities in terms of the Call Server, Signaling Server (SS), Voice Gateway Media Cards (VGMC), Gateway Controller, Network Routing Service (NRS), and Unified Communications Management (UCM). It describes how SNMP is configured, and how it operates to allow the management system to receive management information about the system components.

For information about SNMP capabilities for Survivable Remote Gateway (SRG), see *Survivable Remote Gateway Configuration Guide* (NN42120-501).

Legacy products and releases

This NTP contains information about systems, components, and features that are compatible with Communication Server 1000 Release 7.0 software. For more information about legacy products and releases, click the Technical Documentation link under Support & Training on the Nortel home page: www.nortel.com

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Applicable systems

This document applies to the following systems:

- Communication Server 1000M Single Group (CS 1000M SG)
- Communication Server 1000M Multi Group (CS 1000M MG)
- Communication Server 1000E (CS 1000E)
- Meridian 1 PBX 61C
- Meridian 1 PBX 81C

For more information, see one or more of the following NTPs:

- *Communication Server 1000M and Meridian 1 Large System Upgrades Overview* (NN43021-458)
- *Communication Server 1000E Upgrade Procedures Overview and Introduction* (NN43041-458)

Conventions

The following sections describe the conventions used in this document.

Terminology

In this document, the following systems are referred to generically as system:

- Meridian 1
- CS 1000
- Communication Server 1000M Single Group (CS 1000M SG)
- Communication Server 1000M Multi Group (CS 1000M MG)
- Communication Server 1000E (CS 1000E)
- Meridian 1 PBX 61C
- Meridian 1 PBX 81C

In this document, the following circuit cards are referred to generically as Gateway Controller:

- Media Gateway Controller (MGC) card
- Media Gateway Extended Peripheral Equipment Controller (MG XPEC) card
- Common Processor Media Gateway (CP MG) card

In this document, the information for MGC applies to all Gateway Controller platforms unless otherwise specified.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

In this document, the following hardware platforms are referred to generically as Server.

- Call Processor Pentium IV (CP PIV)
- Common Processor Pentium Mobile (CP PM)
- Common Processor Media Gateway (CP MG)
- Common Processor Dual Core (CP DC)
- Commercial off-the-shelf (COTS) servers
  - IBM x306m server (COTS1)
  - IBM DL320 G4 server (COTS1)
  - IBM x3350 server (COTS2)
  - Dell R300 server (COTS2)

In this document, the generic term COTS refers to all COTS servers. The term COTS1 or COTS2 refers to the specific servers in the preceding list.

Related information

This section lists information sources that relate to this document.

NTPs

The following NTPs are referenced in this document:

- *Network Routing Service Fundamentals* (NN43001-130)
- *Converging the Data Network with VoIP* (NN43001-260)
- *IP Peer Networking Installation and Commissioning* (NN43001-313)
- *IP Trunk Description, Installation, and Operation* (NN43001-563)
- *Signaling Server IP Line Applications Fundamentals* (NN43001-125)
- *Software Input/Output System Messages* (NN43001-712)
- *Software Input/Output Maintenance* (NN43001-711)
- *Communication Server 1000M and Meridian 1 Small System Maintenance* (NN43011-700)
- *Communication Server 1000M and Meridian 1 Large System Maintenance* (NN43021-700)
- *Communication Server 1000E Maintenance* (NN43041-700)
- *Installing Nortel Enterprise Network Management System* (321537-B)
- *Administering Nortel Enterprise Network Management System* (205969-J)
- *Using Nortel Enterprise Network Management System* (207569-G)

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Online

To access Nortel documentation online, click the Technical Documentation link under Support & Training on the Nortel home page:
www.nortel.com

CD-ROM

To obtain Nortel documentation on CD-ROM, contact your Nortel customer representative.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

SNMP system capabilities

Contents

This chapter contains information about the following topics:

"SNMP terminology" (page 17)

"Overview" (page 19)

"SNMP capabilities" (page 21)

"Logical architecture of fault management" (page 22)

- "SNMP profiles" (page 22)

"System SNMP architecture" (page 25)

- "Call Server architecture" (page 25)
- "Voice Gateway Media Card and Gateway Controller architecture" (page 28)

"Connections" (page 32)

- "Access to SNMP components" (page 32)
- "Sample configuration" (page 34)

"Call Server and IP Telephony device connections" (page 35)

"SNMP and ISSS/IPsec" (page 35)

SNMP terminology

Event – an occurrence on the system that causes a change in status on a device or system component which can trigger a log message and a corresponding message/trap.

Alarm – a message notification (for example, SNMP trap or system message) that indicates a fault on the device. The alarm may or may not represent an error in the system.

Fault – an event that is abnormal and undesirable, and can affect service. Generally faults require some type of intervention or corrective action. Faults that require corrective action are sent as alarms. Although the term fault usually refers to hardware and the term error usually refers to software, you can use these terms interchangeably.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

community string – an access mechanism in SNMP agents that provides management systems read-only or read/write access to system data. An agent does not accept requests from a management system that does not use a valid community string.

Profile – a logical group of SNMP parameters configured and assigned to UCM-managed network elements.

Report - describes some of the operational traits of a network.

System message – a message that is sent from the system when an event occurs. All system messages can be sent through a serial port. Most, but not all, system messages also result in the generation of traps. These messages usually are given an identifier in the format XXXnnnn or XXXXnnnn, where X is an alphabetic character and n is a number from zero to nine (for example, AUD0001). For more information about system messages, see *Software Input/Output System Messages* (NN43001-712).

Trap – a one-way notification sent from the SNMP agent on a device to the Network Management System (NMS) when a specific condition occurs, such as the failure of a system component. In Nortel Communication Server 1000 products, the traps are sent in the form of a SNMP V1 TRAP-TYPE Protocol Data Unit (PDU). The PDU type is TRAP-V1, and the trap type is Enterprise-Specific.

Agent – SNMP agent software running on any intelligent device (for example, a PC or router). An agent receives requests from a management system. It also can act as a watchman and initiate traps when a specific event occurs or a threshold is reached.

MIB – Management Information Base. A MIB is a set of objects that represent different kinds of management-related information about a network device. It can be considered a database of information about a device that is accessible through an agent. A MIB Module describes the objects (entries) that are to be included in the agent database. MIB objects must be defined as to which objects are available, the object names and types, and the related values. This information is included in a MIB Module.

MIB Module – a file used by the management system to understand the structure of the MIB database (and/or the traps) on the device. A MIB Module also can contain the information that defines the structure of the traps sent from the device. In many cases, the MIB Module is simply referred to as a MIB.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Management system – a system that is used to manage devices in a network. In the case of a SNMP management system, the system may send requests to the device agents and receive traps from the network devices. A management system can initiate the *get*, *getNext*, and *set* operations.

`getRequest` command – a SNMP request from the management system to the agent for a specific object in the MIB.

`getNextRequest` command – a request for the next object in the MIB.

`getResponse` command – used by the queried agent to fulfil the request made by the management system.

`setRequest` command – a request from the management system to the device agent to change the value of a parameter in the MIB.

Overview

Simple Network Management Protocol (SNMP) is part of the Transport Control Protocol/Internet Protocol (TCP/IP) suite. The SNMP architecture consists of management systems and agents. SNMP provides the ability to monitor devices and communicate their status information (when requested or when an event occurs) to designated locations on a TCP/IP network.

SNMPv1 and SNMPv2 are supported for querying elements on the network, SNMPv1 is supported for trap generation, and SNMPv2C is supported for the MIBs.

SNMP provides for the collection and manipulation of network information. It gathers information by the following methods:

- from traps sent by the devices
- by polling the devices on the network from a management system at fixed or random intervals. See Figure 1 "Management system responsibilities" (page 20).

  When the request is received, the agent on the device returns the requested data. See Figure 2 "Agent responsibilities" (page 20).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Figure 1
Management system responsibilities


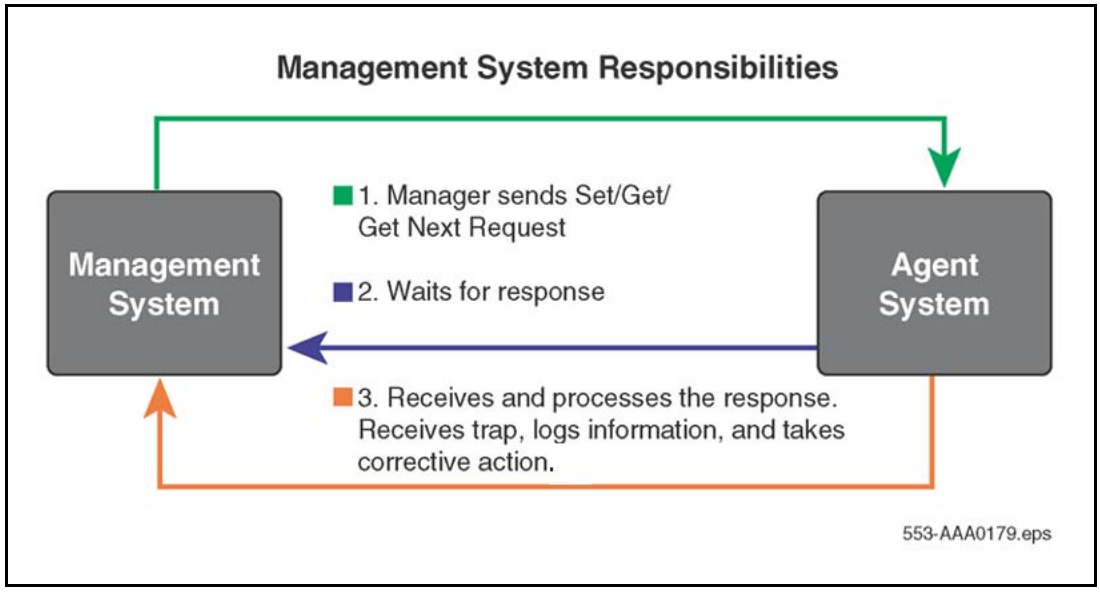


Figure 2
Agent responsibilities

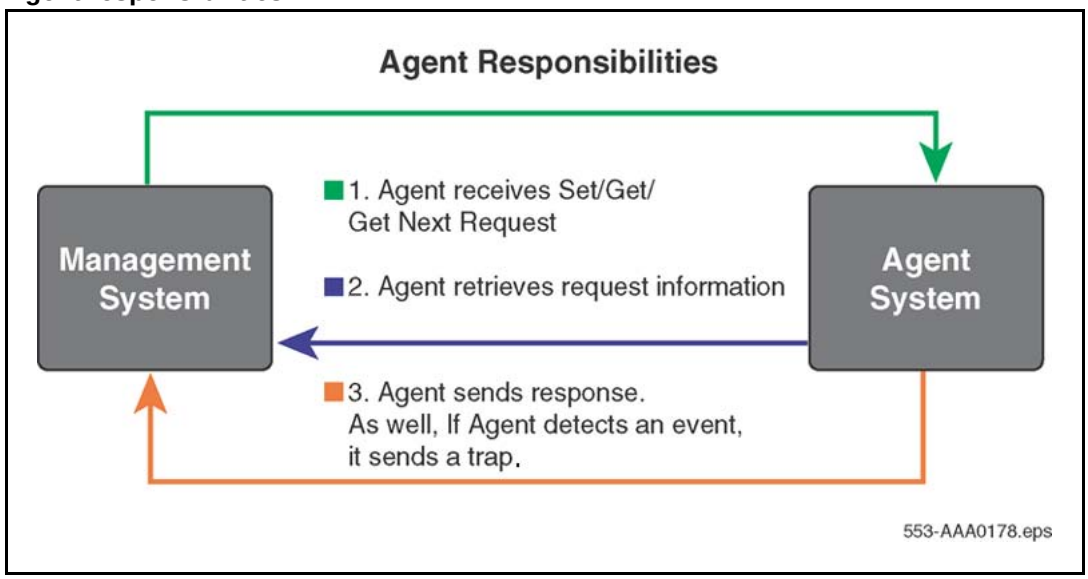

You can perform fault management configuration at the network level or at the system level. At the network level the SNMP Profile configuration interface, the UCM SNMP Profile Manager, is hosted on the UCM Primary security server. This element must be active for the network level configuration to be available as the capability is not available on the UCM Backup security server or on any other element.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

System level configuration is performed using the Element Manager for the system or by the CLI interface of the Communication Server 1000 Call Server.

SNMP capabilities

To understand how SNMP operates on a system running Communication Server 1000 software, it is important to be aware that a number of device components have embedded SNMP agents. The device components are:

- Call Servers
- Signaling Servers
- Gateway Controllers
- Voice Gateway Media Cards
- Network Routing Service (NRS)
- Unified Communications Management (UCM)

Although the devices each contain specific SNMP agents, they all support the COMMON-TRAP-MIB.mib, which means that traps sent from each device agent are in the same format. CallPilot and Contact Center also have SNMP capabilities that are described in their respective technical documentation.

All traps sent from the devices originate as events that trigger system messages. Except for Service Change (SCH) messages, approximately 80 percent of system messages are also sent as traps. System messages can be sent through the serial port of the component to a receiving system, or they can be sent as traps by the SNMP protocol through an IP network to a receiving SNMP management system or a third-party SNMP Management System.

The Call Server sends most of the system message categories, which range from the ACD type to the XMI type. The Call Server can suppress messages or traps below a specified priority and alter the individual message or trap severity through the Event Preferences Table.

Few trap message types are sent from the Signaling Server and the Voice Gateway Media Card devices. The traps are primarily ITG, ITS, QOS, or WEB message types.

Note 1: See the “List of terms” (page 123) for a description of the trap message types.

Note 2: Elements on Linux platforms (such as Co-resident Call Server and Signaling Server, NRS, Signaling Server, Management System) support UCD-SNMP-MIB, which has the same access privileges as

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

MIB-II. Call Servers with VxWorks platforms do not support UCD-SNMP MIB.

Logical architecture of fault management

Fault management is implemented in Element Manager and hosted on the Unified Communications Management (UCM) Common Services framework. UCM provides a generic launch point, a common user interface, and a generic infrastructure for all applications. UCM is installed on a Linux operating system and Java is the technology used for fault management implementation.

SNMP profiles

Logical groups of SNMP parameters are called SNMP profiles. There are three types of SNMP profiles: MIB Access, System Info, and Alarm.

Table 1
SNMP profile names and descriptions

Profile name	Description
MIBACCESS	This profile contains the following items: • Administrator Group1 community string • Administrator Group2 community string • Administrator Group3 community string • System Management Read community string • System Management Write community string
SYSINFO	This profile contains the following items: • System Name—value assigned to MIBII sysName object • System Contact—value assigned to MIBII sysContact object • System Location—value assigned to MIBII sysLocation object • Navigation Site Name—value sent as part of commonMIBComponentID object of common trap • Navigation System Name—value sent as part of commonMIBComponentID object of common trap The System Name has a default default value of %hostname%. If the System Name is configured as %hostname%, this value is replaced with the actual host name of the system when the SNMP GET query occurs on the MIBII System name. For example, an EM system has a host name of EM-HOST, the Call Server has a host name of CS-HOST, and the Signaling Server has a host name of SS-HOST. If a System Info profile with a System Name value of

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Profile name	Description
	%hostname% is assigned to the EM server and the Call Server and the same profile propagates to the Signaling Server through the Call Server, when the SNMP GET query occurs on the MIB II System Name on the EM server, the Call Server, and the Signaling Server, the returned values are EM-HOST, CS-HOST, and SS-HOST, respectively.
ALARM	This profile contains the following items: • trap community • alarm Threshold • option to enable or disable trap • eight trap destinations with port numbers ***Note:*** If you configure the trap destination IP address without specifying a port, the SNMP trap is sent to the default port of the configured destination (port 162).

Note: If you configure SNMP parameters using overlay 117 or EM, a custom profile is created in SNMP Profile Manager and assigned to the element on which the SNMP parameters are configured. The custom profile is read-only; you cannot modify it using the SNMP Profile Manager.

SNMP Profile Manager

The SNMP Profile Manager runs on the UCM Primary Security Server. It performs SNMP configuration at the security domain level. You can add, modify, and delete SNMP profiles using the SNMP Profile Manager. You can configure and assign profiles to the following types of UCM managed elements:

- Communication Server 1000 Call Servers
  - The configuration settings applied to the Call Server are propagated to all system elements associated with the Call Server, such as Signaling Servers, VGMCs, and Gateway Controllers. These elements are all running CS 1000 applications, such as SIP Line.
- Linux elements running UCM Common Services, but not running Communication Server 1000 applications
  - Examples of these types of elements are standalone NRS elements, the UCM Primary Security Server, or an element running Element Manager, where in all cases there are no other CS 1000 applications installed (such as SIP Line, Signaling Server applications, and so on).


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

You can add only one profile at a time, but you can delete multiple profiles at one time. A newly added profile is assigned version 1.0. When you update or modify the profile, the version number of the profile increments by one.

SNMP configuration propagation

The SNMP configuration is performed using the SNMP Profiles interface in UCM. This interface is active on the UCM Primary security server and transfers the configuration settings to all the elements. For a Call Server system, the configuration is transferred to the Call Server which then transfers the settings to all system elements.Figure 3 "System propagation of SNMP parameters" (page 24) shows how the SNMP configuration changes propagate throughout the system.

Figure 3
System propagation of SNMP parameters

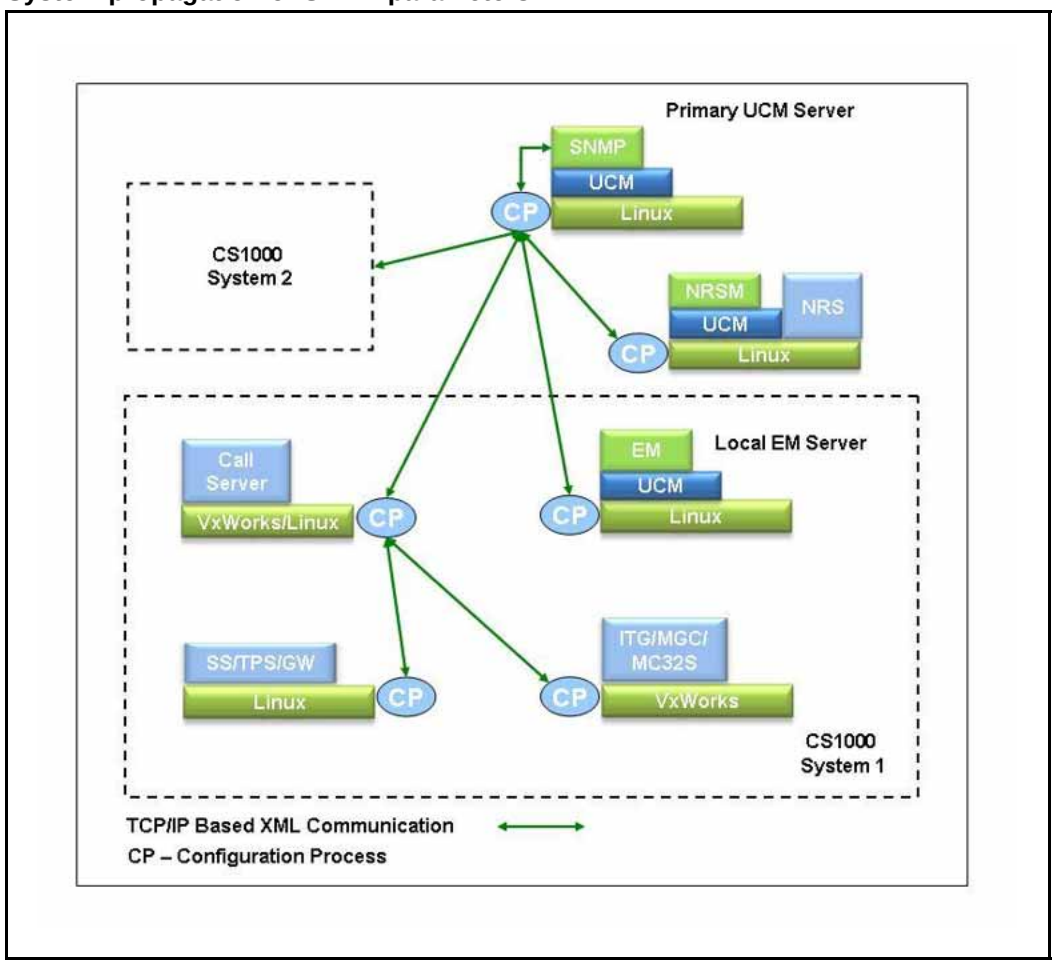

For SNMP Profile Manager procedures, see “SNMP configuration using SNMP Profile Manager” (page 55).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

System SNMP architecture

There are different architectural models for the Call Server, VxWorks elements, and Linux elements. The following sections describe the architecture for each device.


> ***Note:*** In this document, the term *Call Server* also encompasses the SNMP capabilities of the Meridian 1 core.

Call Server architecture

Call Server architecture contains the Event Server and Event Collector. See Figure 4 "Event architecture on the Call Server" (page 26).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Figure 4
Event architecture on the Call Server

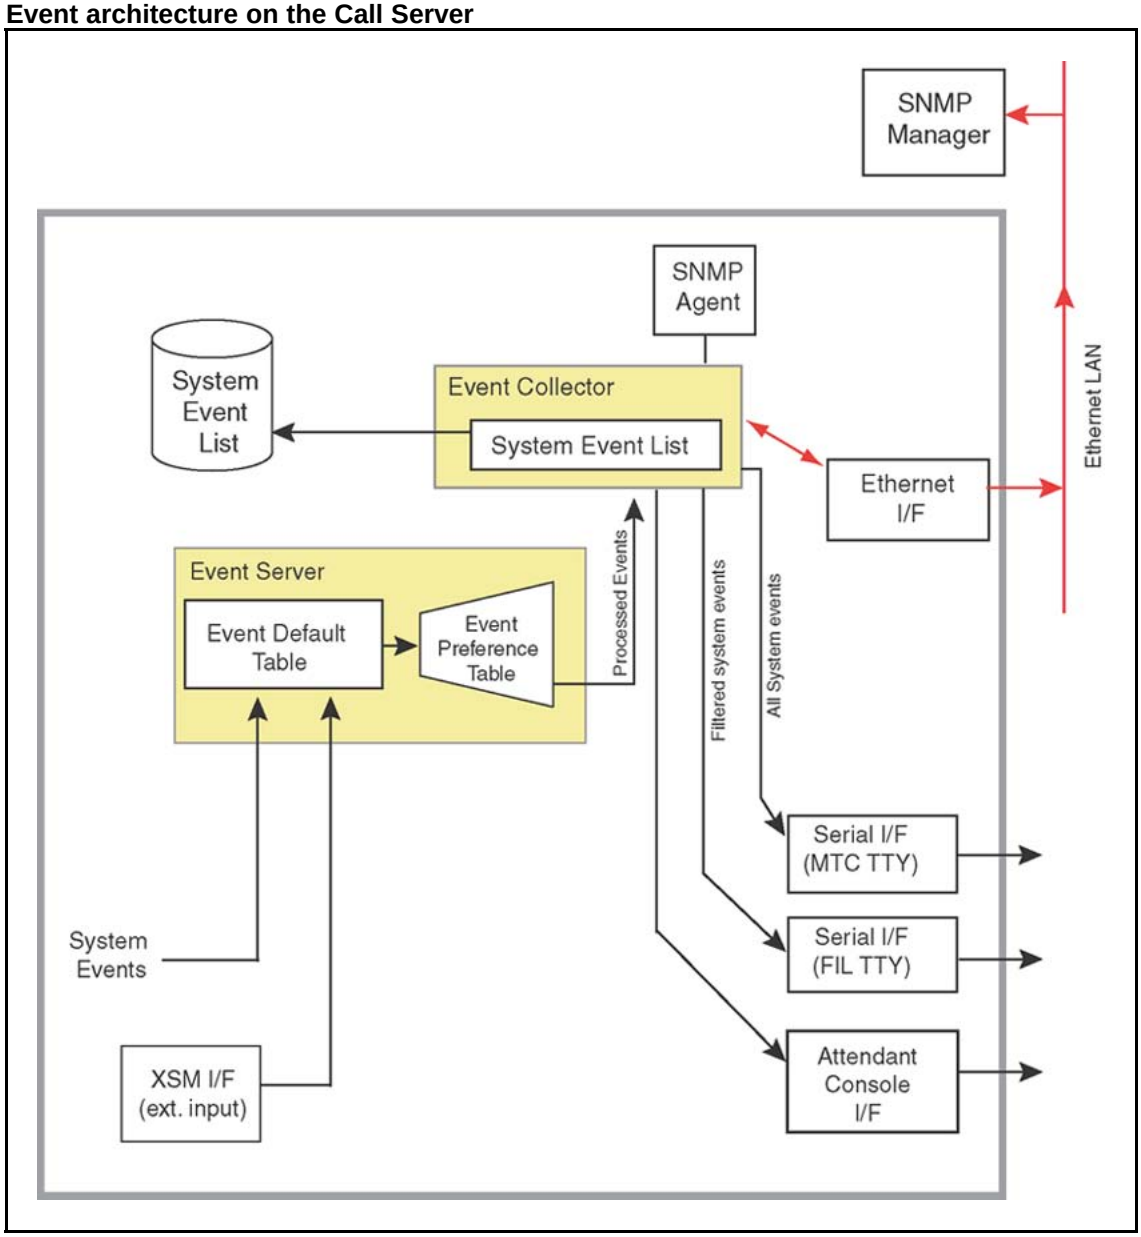

Event Server

The Event Server receives system events (raw event inputs from system tasks) and processes them. The Event Server then logs the events and sends them to the Event Collector. The Event Server also provides event lookup tables and event processing functions.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

There are two tables in the Event Server:

- Event Default Table (EDT)
- Event Preference Table (EPT)

EDT

In normal operation, event messages are found in the Event Default Table (EDT). The preconfigured EDT contains the default event severities. Severities from the EDT are assigned to the event severity field of the system messages and traps before the messages are output from the system. The default severities can be overridden by using either EDT Override Mode or the EPT table.

In Small Systems, due to memory constraints, some system messages are omitted from the EDT. In Large Systems, all system messages are included in the EDT.

EDT Override Mode Use LD 117, to set the EDT to operate in a special mode called the *Override Mode*. This mode assigns all events a severity of Minor or Info.

EPT

The Event Preference Table (EPT) is used to store site-specific preferences that override the default severities of the factory-installed EDT. Usually, the EPT is configured by a site administrator and applies to the entire site. The EPT can not be configured for an individual user.

In the EPT, you can perform the following actions:

- override severities assigned in the Event Default Table
- specify severity escalation thresholds
- specify alarm suppression thresholds

Event Collector and System Event List

The Event Collector is the central collection point for events (system messages) that are generated within the system. The Event Collector maintains in memory a list of system events received. The list is called the *System Event List (SEL)*.

One copy of the SEL is saved in memory, and one copy is saved to disk. The disk copy provides data integrity and survivability. The memory-based copy provides quicker access to the data.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

System message categories

In Communication Server 1000 and Meridian 1 systems, events, known as *system messages*, are defined by system message categories, such as BUG, ERR, and NWS.

For more information about system messages, see *Software Input/Output System Messages* (NN43001-712).

More information

For more information about the configuration of the Event Server and the Event Collector, see “Event Collector” (page 42) and “Event Server” (page 42).

For more information about overriding severities in the EDT, see “How to change Event Default Table settings” (page 45).

SNMP agent

The SNMP agent receives the SNMPv1 and SNMPv2 queries and takes proper action based on the type of query. The SNMP agent provides access to the standard and Enterprise MIBs defined on the system.

Voice Gateway Media Card and Gateway Controller architecture

The Voice Gateway Media Card and Gateway Controller architectures are similar and consist of the Alarm/SNMP Services, Report Log, and SNMP agent. See Figure 5 "Event architecture on the Voice Gateway Media Card and Gateway Controller" (page 29).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Figure 5
Event architecture on the Voice Gateway Media Card and Gateway Controller

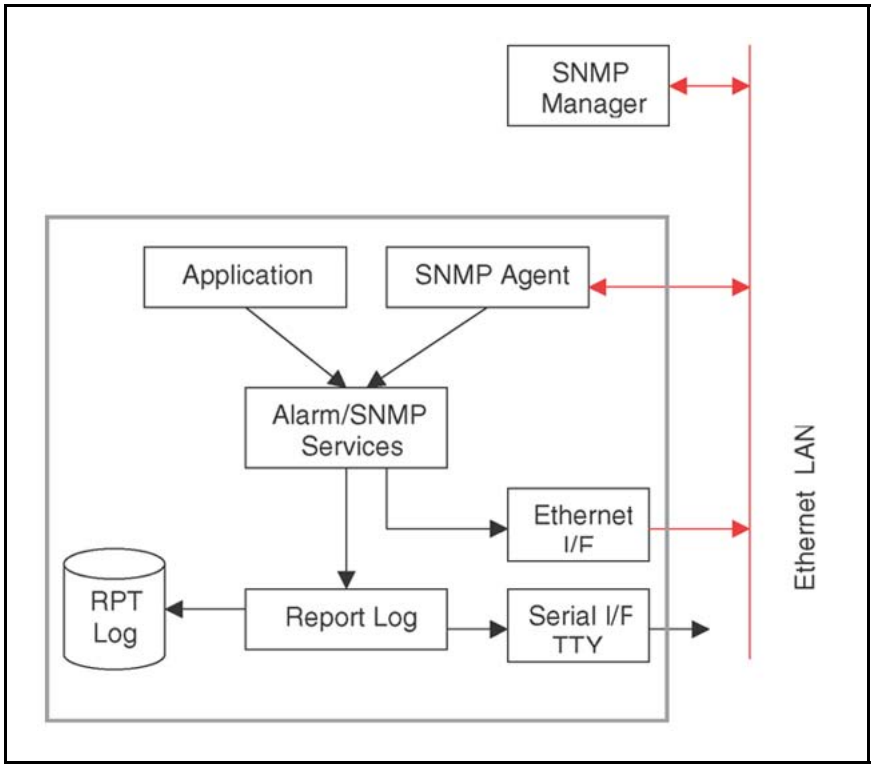


Table 2 "Trap generation process" (page 29) describes the process of generating a SNMP trap on the Voice Gateway Media Card and Gateway Controller.

Table 2
Trap generation process

Step	Description
1	The application generates the alarm message.
2	The alarm message is sent to the Alarm Service software that processes the message.
3	The Alarm Service updates the alarm message with the information necessary to generate the alarm as a SNMP trap.
4	The Alarm Service forwards the alarm to the SNMP Agent.
5	The SNMP Agent generates the SNMP trap that is sent out on the ELAN subnet.

Alarm/SNMP Services

The Alarm/SNMP Services is used by the application to raise an alarm and dispatch a trap. The Alarm Services provides the error category and severity of the alarms and sends the alarm to the Report Log for further

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

processing. The SNMP Services converts the alarm into a trap and sends it to the trap destination list. The SNMP Service lets you define a trap destination list. The alarm category and severity can not be configured.

Report Log

The Report Log receives the alarms and takes the proper action to display or log the alarm, based on the required action defined for each error category. You can view the Report Log.


SNMP Agent

The SNMP Agent receives the SNMP queries and takes the proper action based on the type of query. The SNMP Agent provides access to the standard and Enterprise MIBs defined on the system.

Linux SNMP architecture

The SNMP architecture on Linux is shown inFigure 6 "Common Trap Server in Linux" (page 30) and is described in the following sections.

Figure 6
Common Trap Server in Linux

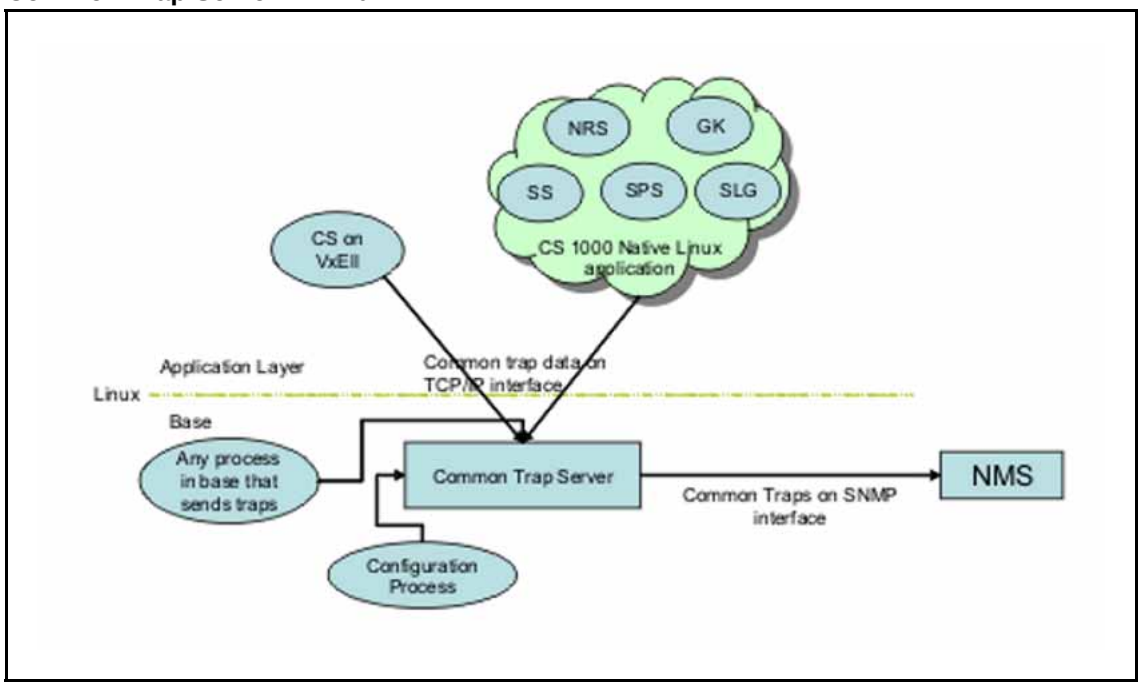

Common Trap Server

Common Trap Server is active in Linux base and binds itself to a predefined TCP/IP port, listening for alarm data sent from any application residing in the same system. On receiving the alarm data from the client applications, it checks for the trap enable/disable flag.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

If the trap is enabled, it suppresses the alarm based on the configured severity level. The suppressed alarms are assigned a unique sequence number, navigation site/system name, date and time, source IP address, and community string.

After assigning the above values, the raw alarm data is converted into the trap structure defined by the Common Trap MIB. Generated traps are then forwarded to the configured destinations.


Net-SNMP agent

The SNMP capabilities are developed by using the Net-SNMP agent. The agent uses an implementation of the MIB-II objects and responds to SNMP requests. Other proprietary MIBs are also supported by the Net-SNMP agent, such as the QOSTRAFFIC-MIB.mib.

Media Application Server SNMP architecture

Media Application Servers (MAS) can be deployed in a system to provide media services, as shown in Figure 7 "IP Media Services system architecture" (page 31). Media Application Servers run on Linux base and send SNMP traps using the Nortel Networks Reliability MIB, as opposed to the Common Trap MIB used by other Communication Server 1000 applications.

Figure 7
IP Media Services system architecture

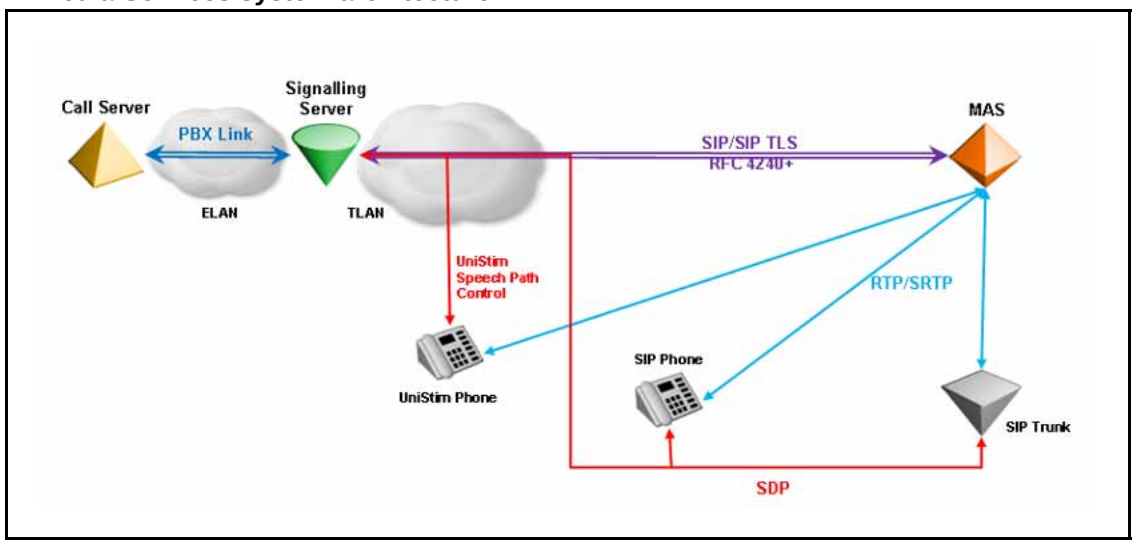

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Network management systems receiving SNMP traps from MAS elements receive both Nortel Networks Reliability MIB (MAS) and Common Trap MIB (Communication Server 1000) formats. MAS only sends outgoing SNMP traps. There is no support for SNMP queries relating to the Nortel Networks Reliability MIB.

> ***Note:*** MAS only supports a single trap destination, unlike Communication Server 1000 Common MIB traps that support up to eight destinations.

Configuration of the SNMP trap destination for MAS must be performed separately using the MAS management interface. For information about MIBs for MAS, refer to the MAS documentation.

Connections

For more information about connecting the system to the management system, see *Converging the Data Network with VoIP* (NN43001-260).

Access to SNMP components

The system SNMP interfaces provide alarms from Communication Server 1000 and Meridian 1 systems so that those alarms can be monitored on a Network Management System (NMS).

Nortel SNMP capability supports existing NMSs by generating traps to represent system events and alarms. Alarm information is in the traps and includes the following:

- description of the condition that caused the trap to be generated
- severity
- system message identifier (commonMIBErrCode). For information about the system message identifier, see *Software Input/Output System Messages* (NN43001-712).

For information about trap components, see “Trap format” (page 70).

System SNMP traps can be sent to specified destinations; that is, NMSs or other monitoring systems. Configure a maximum of eight trap destinations for each device.

Network routing table entries

Most elements have both ELAN and TLAN network interface connections. However, the Call Server will only have an ELAN network interface if it does not have co-resident Signaling Server applications. SNMP traps are sent out on the ELAN network interface on all of the devices. When the device sending traps has both ELAN and TLAN network interfaces, the

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

routing table for the device must contain information about the correct network interface (for example, ELAN) and the gateway to be used for each destination.

The associated host route entries for new trap destinations are automatically added to the network routing table for all elements. Each trap destination IP address is verified whether it belongs to same ELAN/TLAN subnet or not. If a trap destination IP address does not belong to the same ELAN/TLAN subnet, it is added to the network routing table with the ELAN gateway as its gateway. If the trap destination configurations are removed, the matching entry is removed from the network routing table.

The automatic addition of network routing entries detailed in this section only applies to the routing of configured SNMP traps. It can be necessary to configure network routes to access devices using the ELAN for SNMP MIB queries, or when using other means of access. You can add routing entries to devices using procedures documented in *Element Manager System Administration* (NN43001-632).

The MGC has an Element Manager interface to add routing entries.

Trap and MIB access

SNMP traps are sent out using the ELAN interface. Table 3 "MIB access by interface" (page 33) lists various elements and their MIB access by ELAN and TLAN interface. These properties apply to all MIBs supported on each respective element.

Table 3
MIB access by interface


Element	ELAN	TLAN
Co-resident Call Server and Signaling Server (Linux)	YES	YES
Call Server (CP PIV)	YES	N/A
Call Server (CP PM)	YES	N/A
COTS (Linux)	YES	YES
Gateway Controller	YES	NO
MC32S	YES	NO
ITG-SA	YES	NO

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Sample configuration

One configuration for sending SNMP traps is a dedicated Ethernet configuration using an Ethernet network interface on the system. An example of this configuration is shown in Figure 8 "Typical SNMP Ethernet LAN" (page 34).

Figure 8
Typical SNMP Ethernet LAN

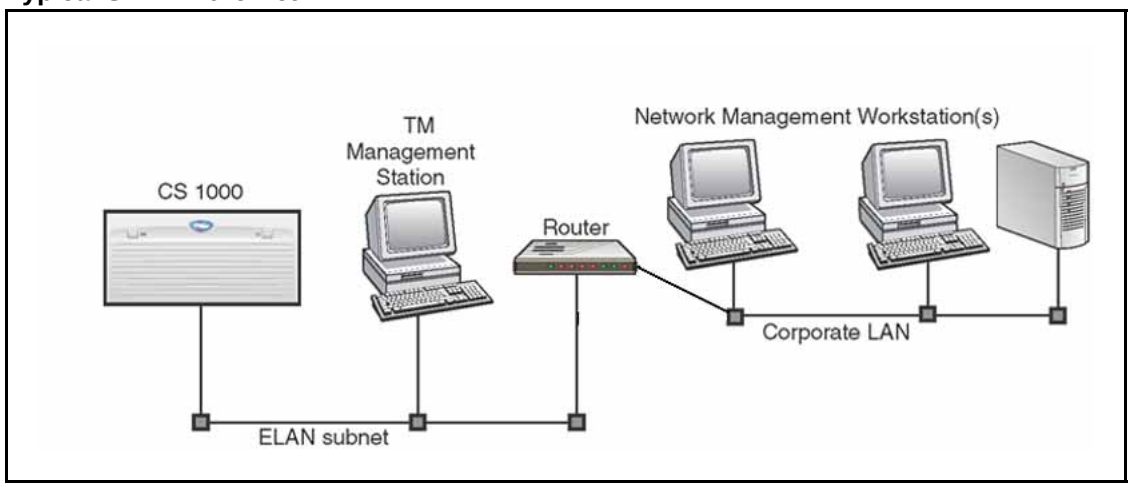


The system Ethernet network interface must reside on a dedicated LAN, the system separated from external LAN traffic. SNMP traps are forwarded through a router or gateway to Network Management workstations residing elsewhere in the network.

For a WAN configuration, expand the Ethernet configuration to service multiple systems in or network environments. SNMP traps are forwarded through routers or gateways to Network Management workstation(s) residing somewhere else in the network. This configuration is shown in Figure 9 "Typical SNMP Ethernet WAN" (page 35).

For detailed information about LAN and WAN configuration of Data Networks, see *Converging the Data Network with VoIP* (NN43001-260).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Figure 9
Typical SNMP Ethernet WAN

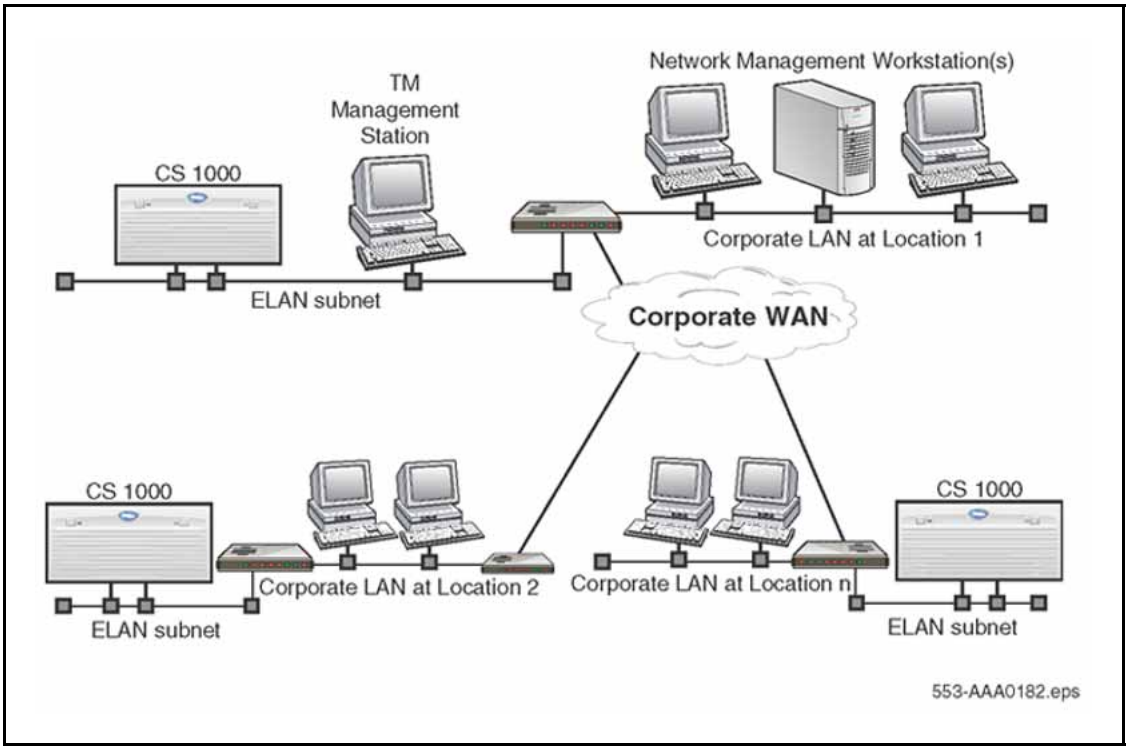

Call Server and IP Telephony device connections

For information about Call Server and IP Telephony device connections, see *Converging the Data Network with VoIP* (NN43001-260).

Geographic Redundancy SNMP configuration

For systems configured with Geographic Redundancy, SNMP configuration data from the Primary Call Server is not synchronized with the Secondary Call Servers. You can use SNMP Profile Manager to configure and assign SNMP profiles to multiple elements, or you can perform SNMP configuration separately on each Secondary Call Server using either CLI (LD 117) or Element Manager.

SNMP and ISSS/IPsec

SNMP configuration information cannot be passed between SNMP Profile Manager and a Communication Server 1000 Call Server when IPsec is configured with an Intra System Signaling Security (ISSS) level of Full.

However, there is an exception to this if the UCM Primary Security Server resides on an element associated with the system, because then it is included in the UCM security domain. In this case, the UCM Primary Security Server has a system application, such as Call Server, Signaling

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Server applications, or SIP Line application running on the same element. Configuration by SNMP Profile Manager for this system will function correctly with an ISSS level of Full because IPsec communication is enabled between all system elements.

If you use an ISSS level of Full for a system, Nortel recommends that you perform SNMP configuration using Element Manager or the CLI (LD 117). All system elements will be correctly configured. SNMP Profile Manager is normally notified of configuration changes, such as a custom profile being used for that system. However, in this case, there is no communication possible with the SNMP Profile Manager. As a result, the SNMP Profile Manager cannot accurately reflect the configuration status of the system, and such information should be ignored.

There may be cases where a lower level of ISSS is initially used on a system (None or Optimal). If SNMP Profile Manager is used to configure SNMP for a system, such functionality will cease to work after ISSS is set to Full. You can then use Element Manager or CLI (LD 117) to modify SNMP configuration, thereby converting to custom SNMP profiles.

For more information about ISSS/IPsec, see *Security Management Fundamentals* (NN43001-604).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Configuring SNMP

Contents

This chapter contains Information about the following topics:

“Overview” (page 38)

“Configuring SNMP on the Call Server using the CLI” (page 39)

- “Configuring target IP address” (page 40)
- “Verifying the SNMP configuration” (page 41)
- “Overview of Alarm Management on the Call Server” (page 42)
- “Event Collector” (page 42)
- “Event Server” (page 42)
- “Community strings” (page 45)

“SNMP CLI commands” (page 47)

“SNMP configuration using SNMP Profile Manager” (page 55)

“SNMP configuration using Element Manager” (page 66)

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Overview

You can use various methods (UCM SNMP Profile Manager, Command Line Interface [CLI], or Element Manager) to configure SNMP for a system, depending on the system platform (Meridian 1 or Communication Server 1000) and the network device.

> ***Note:*** SNMP Profile Manager only manages Linux elements that are registered with the UCM Primary Security Server and are thus members of the same security domain. If an element does not have an established PBXLink with a Call Server, you cannot configure it using Element Manager or the Call Server CLI. For an element that is outside of the UCM security domain, you can choose not to support SNMP on the element, which means that it will not send SNMP traps or respond to MIB queries. Or, if SNMP support is desired for the element, you can configure it as a standalone UCM Primary Security Server within its own security domain. This option allows you to use SNMP Profile Manager to configure SNMP for the element, but it is not recognized as a trusted member by elements within other UCM security domains.

SNMP configuration entails configuring the following components:

- trap destinations
- community strings (to access MIBs)
- trap community
- Call Server filtering (EDT, EPT, and alarm suppression thresholds)
- MIB II system group values

Table 4 "Interfaces for configuring SNMP" (page 38) describes where you configure the various elements.

Table 4
Interfaces for configuring SNMP

SNMP configuration of	Call Server CLI	Element Manager	SNMP Profile Manager
Admin group community strings	Yes	Yes	Yes
Trap community string	Yes	Yes	Yes
Trap destinations	Yes	Yes	Yes
MIB II system group values	Yes	Yes	Yes

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 4
Interfaces for configuring SNMP (cont'd.)

SNMP configuration of	Call Server CLI	Element Manager	SNMP Profile Manager
EDT/EPT edits	Yes	Yes	No
Alarm suppression threshold edits	Yes	Yes	Yes
Note: The configuration propagates to all system elements (Voice Gateway Media Cards, Gateway Controllers, Signaling Servers) when you issue the **`sync snmpconf`** command.			

Configuring SNMP on the Call Server using the CLI

The administrator can use the command format in LD 117 to do the following:

- modify the system group parameters for MIB II
- configure or modify the community strings
- configure or modify the Trap community string
- configure or modify the minimum severity level of alarms sent from the Call Server
- configure the Alarm Management features
- propagate community strings to the Voice Gateway Media Card and Gateway Controller on the system
- send a test alarm
- create, modify, and delete EPT entries
- import, export, and reload the EPT file
- print the EDT and EPT entries
- print an event list sorted by severity

Both administration and maintenance commands appear in LD 117.

When you use LD 117 commands to perform SNMP configuration, the changes do not automatically propagate throughout the system. You must run the SYNC SNMPCONF command to propagate the configured SNMP parameters to the Call Server and all network elements with an established PBXlink to the Call Server, such as Signaling Server, VGMC, or Gateway Controller.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

In addition, changes to SNMP parameters are noted by the SNMP Profile Manager in UCM, which creates a custom profile. A custom profile is created whenever you configure SNMP parameters using LD 117 or the SNMP configuration pages in Element Manager.

Note: If a Call Server already has an assigned profile from the SNMP Profile Manager, that profile is replaced with the custom profile. No warning message appears when a preassigned profile is replaced with a custom profile.

Command format

LD 117 uses a Command Line input interface (input parser) that has the following general structure (where => is the command prompt):

```
=> COMMAND OBJECT[(FIELD1 value) (FIELD2 value)... (FIELDx value)]
```

LD 117 provides the following configuration features:

- **Context Sensitive Help**

  Help is offered when **?** is entered. The Help context is determined by the position of the **?** entry in the command line. If **?** is entered in the COMMAND position, Help text is displayed that presents all applicable command options. If **?** is entered in the OBJECT position, HELP text is displayed that presents all applicable OBJECT options.

- **Abbreviated Inputs**

  The input parser recognizes abbreviated inputs for commands, objects, and object fields. For example, **N** can be entered for the command NEW, or **R** can be entered for the object Route.

- **Optional Fields**

  Object fields with default values can be bypassed by the user on the command line. For example, to configure an object that consists of fields with default values, enter the command, the object name, and press **<enter>**. You do not have to specify all object fields.

ATTENTION
If you make changes to the EDT/EPT parameters, a data dump (EDD) must be performed.

Configuring target IP address

On a Call Server, use the LD 117 command **SET OPEN_ALARM** to configure the target IP addresses of the SNMP Manager.

Use LD 117 commands to configure the SNMP Agent to send out SNMP traps to the IP address of the management system. Specify up to eight SNMP trap destinations (IP addresses) for the Call Server, Signaling Servers, Voice Gateway Media Cards, and Gateway Controllers.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

For the command syntax, see Table 10 "Commands - alphabetical order" (page 47).

Verifying the SNMP configuration

When the SNMP installation and setup is complete, verify that the configuration is operational. To verify the configuration, follow the steps in “Verifying the SNMP configuration” (page 41).

Verifying the SNMP configuration

Step	Action
1	Verify the system Ethernet connection. Use the standard PING command to ping the switch for a response. If there is no response, verify the Ethernet hardware, cabling, and configuration.
2	Verify that the system SNMP Agent is alive. The following MIB II variables are queried by using a standard MIB browser, available on the NMS: • SysUpTime • SysDescr • SysObjectId.
3	Verify that SNMP traps are sent and received correctly. In LD 117, use the **TEST ALARM** command to manually generate a trap that is sent to each alarm destination IP address configured on the Call Server.

--End--

TEST ALARM command

Use a diagnostic utility for alarm testing by entering a command in LD 117. The Test Alarm utility simulates an alarm to verify that the alarms are generated correctly and are sent to their configured destinations. The alarm is sent to the trap destination list configured on the system by using LD 117.

The **TEST ALARM** command creates and sends a SNMP trap to the trap destination list, and a message appears on the console. The alarm test utility sends a trap for any specified parameter.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

The flow of the message goes through the following:

- Event Default Table (EDT) to assign the correct severity if the system message is valid; otherwise, the system message is assigned a severity of Info.
- Event Preference Table (EPT) to modify the severity or suppress the system message, based on a threshold.

The system message is sent to the TTY, is written to the System Event List (SEL), and is sent as a trap. The severity of the trap follows the severity of the existing message that is defined by the EDT and EPT. A nonexistent system message has a severity of Info.

If the Test Alarm utility uses a valid system message and sends a trap to the trap destination correctly, it does not guarantee that the same system message, if it occurs, is sent as a trap. Some system messages, such as SCH, do not generate a corresponding trap, but provide operator feedback.

See Table 10 "Commands - alphabetical order" (page 47) for the TEST ALARM command syntax.

Overview of Alarm Management on the Call Server

With the Alarm Management feature, all processor-based system events are processed and logged into a disk-based SEL.

Events such as BUG and ERR error messages, that are generated as a result of maintenance or system activities, are logged into the SEL. Events generated as a result of administration activities, such as SCH or ESN error messages, are not logged into the SEL. Unlike the System History File, this System Event List survives Sysload, Initialization, and power failures.

Event Collector

The Event Collector captures and maintains a list of all processor-based system events on the Call Server. The Event Collector also routes critical events to TTY ports and lights the attendant console minor alarm lamp as appropriate. You can print or browse the SEL.

Event Server

The Event Server consists of two components:

1. **Event Default Table (EDT)**: This table associates events with a default severity. By using the **`CHG EDT`** command in LD 117, the EDT is overridden so that all events are set to the configured severity. You can also view the EDT with the commands in LD 117. The EDT is stored in a disk file but is scanned into memory on startup for rapid

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

run-time access. Table 5 "Sample Event Default Table entries" (page 43) lists examples of Event defaults.

Table 5
Sample Event Default Table entries

Error Code	Severity
ERR220	Critical
IOD6	Critical
BUG4001	Minor

Note: Error codes that do not appear in the EDT are assigned a default severity of Info.

2. **Event Preference Table (EPT)**: This table contains site-specific preferences for event severities as well as criteria for severity escalation and alarm suppression. The administrator configures the EPT to do the following:

   a. override the default event severity assigned by the default table

   b. escalate the event severity of frequently occurring minor or major alarms

See an example of an EPT in Table 6 "Sample Event Preference Table (EPT)" (page 43).

Table 6
Sample Event Preference Table (EPT)

Error Code	Severity	Escalate Threshold (events/60 sec.) (see Note 2)
INI???	Default	7
ERR??? (see Note 1)	Critical	5
BUG1??	Minor	0
HWI363	Major	3
Note 1: The question mark (?) is a wildcard. See "Wildcards" (page 44) for an explanation of wildcard entries. ***Note 2:*** The window timer length defaults to 60 seconds, however, the administrator can change this value. See "*Global window timer length*" (page 44) for more information.		

After the alarm goes through the EDT and the EPT, the severity level is checked against the alarm suppression threshold. The **CHG SUPPRESS_ALARM** command is used to configure the minimum severity of alarms that are sent from the system.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Wildcards

The special wildcard character **?** can be entered for the numeric segment of an error code entry in the EPT to represent a range of events. All events in the range indicated by the wildcard entry can then be assigned a particular severity or escalation threshold.

For example, if **ERR? ???** is entered and assigned a MAJOR severity in the EPT, all events from ERR1000 to ERR9999 are assigned MAJOR severity. If **BUG3?** is entered and assigned an escalation threshold of five, the severity of all events from BUG0030 to BUG0039 is escalated to the next higher severity if their occurrence rate exceeds five per time window.

The wildcard character format is as follows:

- **ERR?** = ERR0000 - ERR0009
- **ERR??** = ERR0010 - ERR099
- **ERR???** = ERR0100 - ERR0999
- **ERR????** = ERR1000 - ERR9999

Escalation and suppression thresholds

The escalation threshold specifies a number of events by window timer length that, when exceeded, causes the event severity to be escalated up one level. The window timer length is set to one minute by default. Escalation occurs only for minor or major alarms. Escalation threshold values must be less than the universal suppression threshold value.

A suppression threshold suppresses events that flood the system, and applies to all events. It is set to 15 events per minute by default.

Global window timer length Both the escalation and suppression thresholds are measured within a global window timer length. The window timer length is set to one minute by default. However, you can change the window timer length by using the **CHG TIMER** command in LD 117. See Table 10 "Commands - alphabetical order" (page 47).

EDT/EPT configuration

Commands are available in LD 117 to configure the parameters of the EDT and EPT.

The commands use the following general structure, where => is the command prompt, commands and objects are in bold type, and fields are in regular type. Fields enclosed in parenthesis ( ) are default values.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

How to change Event Default Table settings

The EDT contains the default severities for the alarms in the system. You can change some of the default severities by using the EPT or by using commands that reset all alarms in the EDT to either Info or Minor severity. Use the LD 117 **CHG EDT** command to configure all of the event severities in the EDT to Minor or Info.

Minor The command to change default severities to Minor is

```
CHG EDT Minor
```

The severity of all events in the EDT is configured as Minor.

Info The command to change default severities to Info is

```
CHG EDT Info
```

The severity of all events in the EDT is configured as Info.

Changing Event Preference Tables

You can configure the individual event severities in the Event Preference Table (EPT) to Info, Minor, Major, or Critical. You can also set a different escalation suppression value for a specific message by using the EPT.

The escalation threshold value must be less than the Global Suppression threshold value. The Global Suppression threshold value is defined as the number of occurrences of an event within the global timer window.

Use the **PRT SUPPRESS** command to find the Global Suppression threshold value.

Use the **PRT SUPPRESS_ALARM** command to find the alarm severity threshold value.

Use the **CHG EPT** command to change the severities in the EPT:

```
CHG EPT <EPT entry> [<SEVERITY> <ESCALATE>]
```

Wildcard characters Use wildcard characters for entries in the EPT. See "Wildcards" (page 44) for more information.

Community strings

Read-only and read/write community strings control access to all MIB data. Support exists for a set of administrator community strings with read-only privileges with the default strings of admingroup1, admingroup2, and admingroup3. Configure and view community strings using the interface from which the device was originally configured.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Use commands in LD 117 to configure MIB community strings for access to Call Server MIBs (MIB-II objects), Voice Gateway Media Card, Signaling Server, and Gateway Controller MIBs.Table 7 "MIB access by community string" (page 46) lists the MIB access for community strings, Table 8 "MIB access by system element" (page 46)lists MIB access by system element or platform, and Table 9 "Trap community string" (page 47)lists the system management trap community string that applies to all system elements.

Table 7
MIB access by community string

Community String	MIB			
	MIB-II	Entity-MIB	QOSTRAFFIC-MIB	QOS.MIB
ADMIN_COMM1 (admingroup1)	READ	READ	N/A	N/A
ADMIN_COMM2 (admingroup2)	READ	READ	READ	READ
ADMIN_COMM3 (admingroup3)	READ	READ	N/A	N/A
SYSMGMT_RD_COMM (otm123)	READ	READ	READ	READ
SYSMGMT_WR_COMM (otm321)	READ	READ	READ	READ

Table 8
MIB access by system element

Element	MIB			
	MIB-II	Entity-MIB	QOSTRAFFIC-MIB	QOS-MIB
Call Server	YES	YES	YES	NO
Co-resident Call Server and Signaling Server	YES	YES	YES	YES
Signaling Server	YES	NO	NO	YES
Gateway Controller	YES	NO	NO	NO
MC32S	YES	NO	NO	NO
ITG-SA	YES	NO	NO	NO
Standalone UCM	YES	NO	NO	NO
Standalone NRS	YES	NO	NO	NO

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 9
Trap community string

Community string	Value
SYSMGMT_TRAP_COMM	Public
The trap community string applies to all system elements.	

Community strings are synchronized when you issue the **sync snmpconf** command.

SNMP CLI commands

The following table shows the CLI commands for configuring SNMP parameters.

Table 10
Commands - alphabetical order

=> Command	Description
CHG ADMIN_COMM n aa...a	Changes the admin groups community string, where: • **n** = a number from one to three • **aa...a** = a string with a maximum length of thirty-two characters Default(1) = admingroup1 Default(2) = admingroup2 Default(3) = admingroup3 These communities are used to access different SNMP objects on the Call Server, Signaling Servers, Voice Gateway Media Card, and Gateway Controller. The admingroup strings are case sensitive.
CHG EDT INFO	Overrides the EDT; use INFO as the default severity for all events except those specified in the Event Preference Table (EPT).
CHG EDT MINOR	Overrides the EDT; use MINOR as the default severity for all events except those specified in the Event Preference Table (EPT).
CHG EDT NORMAL	Uses the Event Default Table (EDT) default severities.
CHG EPT aa... a CRITICAL x	Changes an EPT entry to Critical severity, where

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 10
Commands - alphabetical order (cont'd.)

=> Command	Description
	• **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate the value of the EPT entry from (0)-Suppress value, as defined by the default or the **CHG SUPPRESS** entry
CHG EPT aa... a EDT x	Changes the EPT to an NT-defined severity from the EDT, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate the value of the EPT entry from (0)-Suppress value, as defined by the default or the **CHG SUPPRESS** entry
CHG EPT aa... a INFO x	Changes an Event Preference Table (EPT) entry to Information severity, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate the value of the EPT entry from (0)-Suppress value, as defined by the default or the **CHG SUPPRESS** entry
CHG EPT aa... a MAJOR x	Changes an EPT entry to Major severity, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate the value of the EPT entry from (0)-Suppress value, as defined by the default or the **CHG SUPPRESS** entry
CHG EPT aa... a MINOR x	Changes an EPT entry to Minor severity, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate the value of the EPT entry from (0)-Suppress value, as defined by the default or the **CHG SUPPRESS** entry
CHG NAV_SITE aa... a	Change the navigation site name, where • aa...a = a string with maximum length of 32 characters • default = Navigation Site Name ***Note:*** Use a single X to clear the field.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 10
Commands - alphabetical order (cont'd.)

=> Command	Description
CHG NAV_SYSTEM aa... a	Change the navigation system name, where • aa...a = a string with a maximum length of 32 characters • default = Navigation System Name ***Note:*** Use a single X to clear the field.
CHG SELSIZE 5-(500)-2000	Changes the System Event List Size (the number of events in the SEL).
CHG SNMP_SYSCONTACT aa... a	Change the contact person name for this system element (machine). Where aa...a = a string with a maximum length of 100 characters. Default = System Contact. ***Note:*** Use a single X to clear the field.
CHG SNMP_SYSLOC aa...a	Change the defined physical location for this system element (machine). Where aa...a = a string with a maximum length of 100 characters. Default = System Location. ***Note:*** Use a single X to clear the field.
CHG SNMP_SYSNAME aa...a	Change the system name assigned to this system element (machine). Where aa...a = a system name string with a maximum length of 100 characters. • can include a %hostname% variable that will be substituted with the physical hostname of a system element. Default SNMP System Name = "System Name". ***Note:*** Use a single X to clear the field.
CHG SUPPRESS 5-(15)-127	Changes the global suppression for events (the number of occurrences within the global timer window before the event is suppressed).
CHG SUPPRESS_ALARM n	Changes the minimum alarm severity threshold of the alarms that are sent, where **n** is • 0 = All • 1 = Minor • 2 = Major • 3 = Critical

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 10
Commands - alphabetical order (cont'd.)

=> Command	Description
CHG SYSMGMT_RD_COMM aa...a	Changes the system management read-only community string where **aa...a** = a string with a maximum length of thirty-two characters
CHG SYSMGMT_TRAP_COMM aa...a	Changes the Trap community string where **aa...a** = a string with a maximum length of thirty-two characters
CHG SYSMGMT_WR_COMM aa...a	Changes the system management read/write community string where **aa...a** = a string with a maximum length of thirty-two characters
CHG TIMER (1)-60	Changes the global timer window length in minutes. See "*Global window timer length*" (page 44) .
NEW EPT aa... a CRITICAL x	Assigns a Critical severity to a new EPT entry, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate the value of the EPT entry from (0)–Suppress value, as defined by the default or the **CHG SUPPRESS** entry
NEW EPT aa... a EDT x	Assigns an NT-defined severity from the EDT to a new EPT entry, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate the value of the EPT entry from (0)–Suppress value, as defined by the default or the**CHG SUPPRESS** entry
NEW EPT aa... a INFO x	Assigns an Information severity to a new EPT entry, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate the value of the EPT entry from (0)–Suppress value, as defined by the default or the**CHG SUPPRESS** entry
NEW EPT aa... a MAJOR x	Assigns a Major severity to a new EPT entry, where

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 10
Commands - alphabetical order (cont'd.)

=> Command	Description
	• **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate the value of the EPT entry from (0)–Suppress value, as defined by the default or the **CHG SUPPRESS** entry
NEW EPT aa... a MINOR x	Assigns a Minor severity to a new EPT entry, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025) • **x** = optional entry to escalate value of EPT entry from (0)–Suppress value, as defined by default or the **CHG SUPPRESS** entry
OUT EPT aa... a	Deletes a single Event Preference Table (EPT) event, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025)
OUT EPT ALL	Deletes all of the entries in Event Preference Table (EPT).
PRT ADMIN_COMM	Prints the administration group community strings. If you modify profiles without issuing the SYNC SNMPCONF command, the output displays the new configuration value as OVLY 117 Configuration and the current value as ACTIVE Configuration. After you issue the synchronization command, the OVLY 117 value is assigned to ACTIVE Configuration.
PRT EDT aa... a	Prints a single Event Default Table (EDT) event, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025)
PRT EDT aa... a bb...b	Prints a range of Event Default Table (EDT) events, where • **aa... a** = first entry in EDT event range (for example, BUG1000, ERR0025) • **bb...b** = last entry in the EDT event range (for example, BUG1000, ERR0025)
PRT ENABLE_TRAPS	Prints the current value for the SET ENABLE_TRAPS configuration.
PRT EPT aa... a	Prints a single Event Preference Table (EPT) entry, where • **aa... a** = an event class with an event number (for example, BUG1000, ERR0025)
PRT EPT aa... a bb...b	Prints a range of Event Preference Table (EPT) entries, where

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 10
Commands - alphabetical order (cont'd.)

=> Command	Description
	• **aa... a** = first entry in the EPT event range (for example, BUG1000, ERR0025) • **bb...b** = last entry in the EPT event range (for example, BUG1000, ERR0025)
PRT EPT ALL	Prints all of the entries in Event Preference Table (EPT)
PRT NAV_SITE	Print the navigation site name. If you modify profiles without issuing the SYNC SNMPCONF command, the output displays the new configuration value as OVLY 117 Configuration and the current value as ACTIVE Configuration. After you issue the synchronization command, the OVLY 117 value is assigned to ACTIVE Configuration.
PRT NAV_SYSTEM	Print the navigation system name If you modify profiles without issuing the SYNC SNMPCONF command, the output displays the new configuration value as OVLY 117 Configuration and the current value as ACTIVE Configuration. After you issue the synchronization command, the OVLY 117 value is assigned to ACTIVE Configuration.
PRT OPEN_ALARM	Prints the settings for all open SNMP traps (alarms). Only active slots are displayed. If you modify profiles without issuing the SYNC SNMPCONF command, the output displays the new configuration value as OVLY 117 Configuration and the current value as ACTIVE Configuration. After you issue the synchronization command, the OVLY 117 value is assigned to ACTIVE Configuration.
PRT SEL [nn[aaaa]]	Prints the most recent records in the system event list, where • **nn** = 0-(20)-SELSIZE. • [aaaa] = category name (for example, BUG) All categories are printed if not specified.
PRT SELSIZE	Prints the System Event List size.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 10
Commands - alphabetical order (cont'd.)

=> Command	Description
PRT SNMP_SYSGRP	Print all parameters of the MIB-II system group. If you modify profiles without issuing the SYNC SNMPCONF command, the output displays the new configuration value as OVLY 117 Configuration and the current value as ACTIVE Configuration. After you issue the synchronization command, the OVLY 117 value is assigned to ACTIVE Configuration.
PRT SUPPRESS	Prints the global suppress value.
PRT SUPPRESS_ALARM	Prints the alarm suppression threshold value.
PRT SYSMGMT_COMM	Prints the system management community strings and Trap community strings. If you modify profiles without issuing the SYNC SNMPCONF command, the output displays the new configuration value as OVLY 117 Configuration and the current value as ACTIVE Configuration. After you issue the synchronization command, the OVLY 117 value is assigned to ACTIVE Configuration.
PRT TIMER	Prints the global timer window length (in minutes). See "*Global window timer length*" (page 44) .
SET ENABLE_TRAPS aaa	Enables or disables the option to send SNMP traps, where aaa = ON or OFF
SET OPEN_ALARM <slot> <IP address> [port]	Add a SNMP (Simple Network Management Protocol) trap destination (Network Management System), where • <slot> = 0-7 • <IP Address> = any valid value in an x.x.x.x format (TCP/IP) • [port] = port number (if left blank, port 162 is used as the default) ***Note:*** To clear a SNMP trap destination, specify appropriate [slot] value and set [IP Address] = 0.0.0.0.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 10
Commands - alphabetical order (cont'd.)

=> Command	Description
STAT SNMPCONF	This command returns the status of the SYNC SNMPCONF command. The returned results of this command are as follows: • SNMP Configuration is in progress—SNMP parameters have been modified through LD 117 and SYNC SNMPCONF command has not been executed. • SNMP Configuration is completed—SNMP parameters have been modified through LD 117 and SYNC SNMPCONF command has been executed.
SYNC SNMPCONF	Applies configured SNMP parameters to Call Server and propagates them to all elements with established links to the Call Server, such as SS, VGMC, and Gateway Controller. After this command is executed, PRT output listed as OVLY 117 Configuration is assigned to ACTIVE Configuration.
SYNC SYS	Synchronizes Dbconfig and QOS parameters. This command does not synchronize SNMP configuration parameters; use SYNC SNMPCONF.
TEST ALARM aaaa nnnn	Generates an alarm, where • **aaaa** = any character sequence. However, to test how an existing system message category (for example, BUG, ERR, INI) appears in an alarm browser, use an existing system message. • **nnnnn** = any numeric sequence (for example, 1234, 3458) and is optional, defaulting to 0000 The actual output on the TTY is the system message used as the parameter. For example: `BUG1234` The actual trap sent to the trap destination list has the same severity of an existing message, which is defined by the EDT and EPT. Nonexistent system messages have a severity of **Info**. The following items are found in the details section of the trap output: **commonMIBDateAndTime:** = the time when the test is generated

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 10
Commands - alphabetical order (cont'd.)

=> Command	Description
	commonMIBSeverity: = defined by the EDT and EPT or **Info(5)** **commonMIBComponentID:** = the configured value of the Navigation system name: Navigation site name: Call Server (component type) **commonMIBNotificationID:** = 0 **commonMIBSourceIPAddress:** = <IP Address of Call Server> **commonMIBErrCode:** = <AAAANNNN> **commonMIBAlarmType:** = 8 (indicating unknown) **commonMIBProbableCause:** = 202 (indicating unknown) **commonMIBAlarmData:** = Contains textual description The rest of the variable bindings are NULL.

SNMP configuration using SNMP Profile Manager

This section describes how to configure SNMP on the primary UCM server using the SNMP Profile Manager interface.

> ***Note:*** Elements running Media Application Server (MAS) require additional separate configuration. For more information, see "Media Application Server SNMP architecture" (page 31).

You can manage SNMP by logging on to the primary UCM server and navigating to **Network > CS 1000 Servers > SNMP Profiles**. From this page you can access the SNMP Profile Manager or the SNMP Profile Distribution pages.

Adding a new MIBACCESS SNMP profile

Use this procedure to add a new MIBACCESS SNMP profile using the SNMP Profile Manager.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Step	Action
1	Navigate to **Network > CS 1000 Servers > SNMP Profiles**. The SNMP Profile Manager page displays.
2	Click **Add**. The New SNMP Profile page displays.
3	From the Profile Type menu, select MIBACCESS. The MIBACCESS profile configuration options appear, as shown in Figure 10 "MIB Access SNMP profile configuration page" (page 56).

Figure 10
MIB Access SNMP profile configuration page



4	Configure the following options: • Administrator Group1 • Administrator Group2 • Administrator Group3 • System Management Read • System Management Write
5	Click **Save**.

--End--


Adding a new SYSINFO SNMP profile

Use this procedure to add a new SYSINFO SNMP profile using the SNMP Profile Manager.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Step	Action
1	Navigate to **Network > CS 1000 Servers > SNMP Profiles**. The SNMP Profile Manager page displays.
2	Click **Add**. The New SNMP Profile page displays.
3	From the Profile Type menu, select SYSINFO. The SYSINFO profile configuration options appear, as shown in Figure 11 "SYSINFO SNMP profile configuration page" (page 57).

Figure 11
SYSINFO SNMP profile configuration page

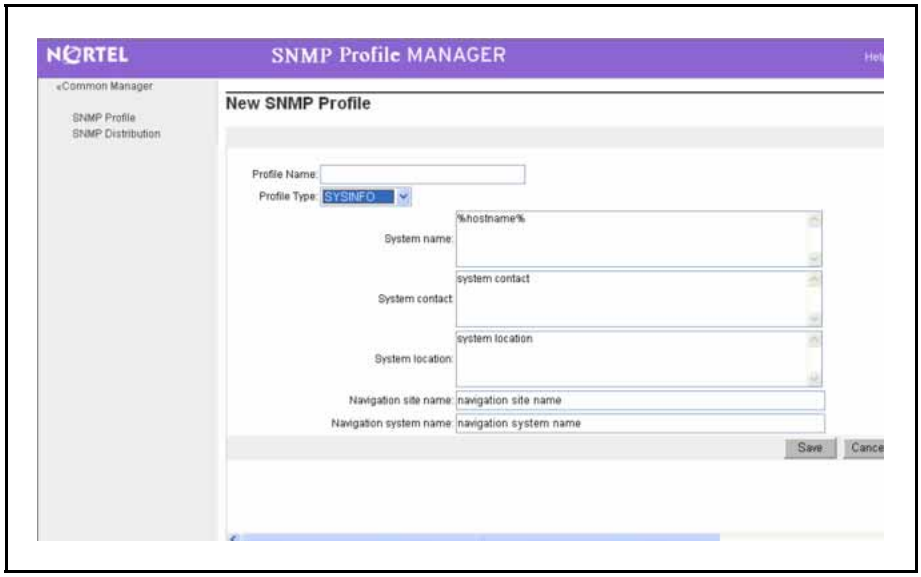

4	Configure the following options: • System name • System contact • System location • Navigation site name • Navigation system name
5	Click **Save**.

--End--


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Adding a new ALARM SNMP profile

Use this procedure to add a new ALARM SNMP profile using the SNMP Profile Manager.

Step	Action
1	Navigate to **Network > CS 1000 Servers > SNMP Profiles**. The SNMP Profile Manager page displays.
2	Click **Add**.
3	The New SNMP Profile page displays.
4	From the Profile Type menu, select ALARM. The ALARM profile configuration options appear, as shown in Figure 12 "ALARM SNMP profile configuration page" (page 58).

Figure 12
ALARM SNMP profile configuration page

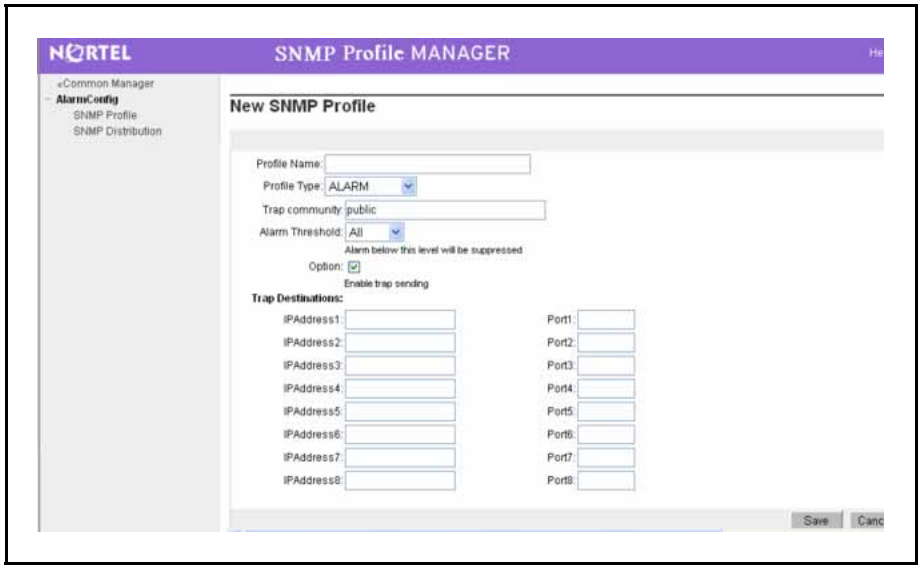

Step	Action
5	Configure the following options: • Trap community • Alarm Threshold • Option to enable or disable trap • Trap Destinations with IP addresses and port numbers (maximum of eight)
6	Click **Save**.


--End--

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Editing a MIBACCESS SNMP profile

Use this procedure to edit a MIBACCESS SNMP profile. Each SNMP profile is shown in the SNMP Profile Manager page as a link.

Step	Action
1	From the SNMP Profile Manager page, click the link of the MIBACCESS profile to modify. ***Note:*** You cannot modify a custom or default profile. The SNMP MIB Access Profiles Details page appears.

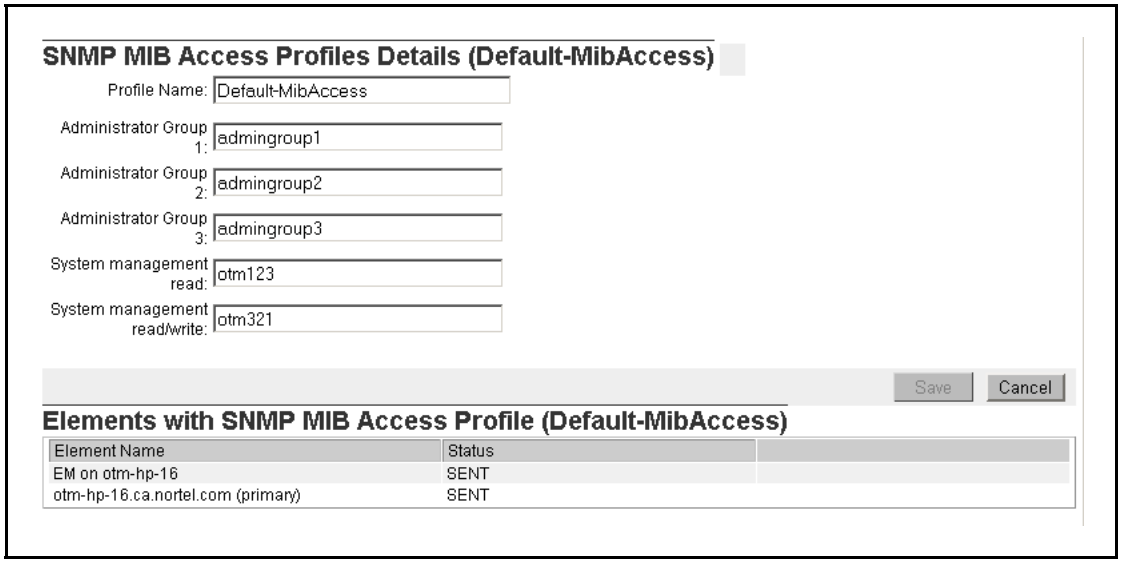

	The top section of the page provides the profile details for editing.
2	Make the required changes to the fields in the profile details section.
3	Click **Save**. The details are committed to the profile and propagated to the elements that currently use that profile. The bottom section of the page lists the elements that are currently associated with the profile. Each element also displays a status. When the elements are updated successfully with the changed profile data, the status appears as ASSIGNED. If an error occurs while updating profile to an element, the status appears as PENDING.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.


If you modify the profile name, the version number is set to 1.0. If the profile name is not changed but you make modifications to any field in the profile, the version number increments by 1.0.

--End--

Editing a SYSINFO SNMP profile

Use this procedure to edit a SYSINFO SNMP profile. Each SNMP profile is shown in the SNMP Profile Manager page as a link.

Step	Action
1	From the SNMP Profile Manager page, click the link of the SYSINFO profile to modify. ***Note:*** You cannot modify a custom or default profile. The SNMP SysInfo Profiles Details page appears.

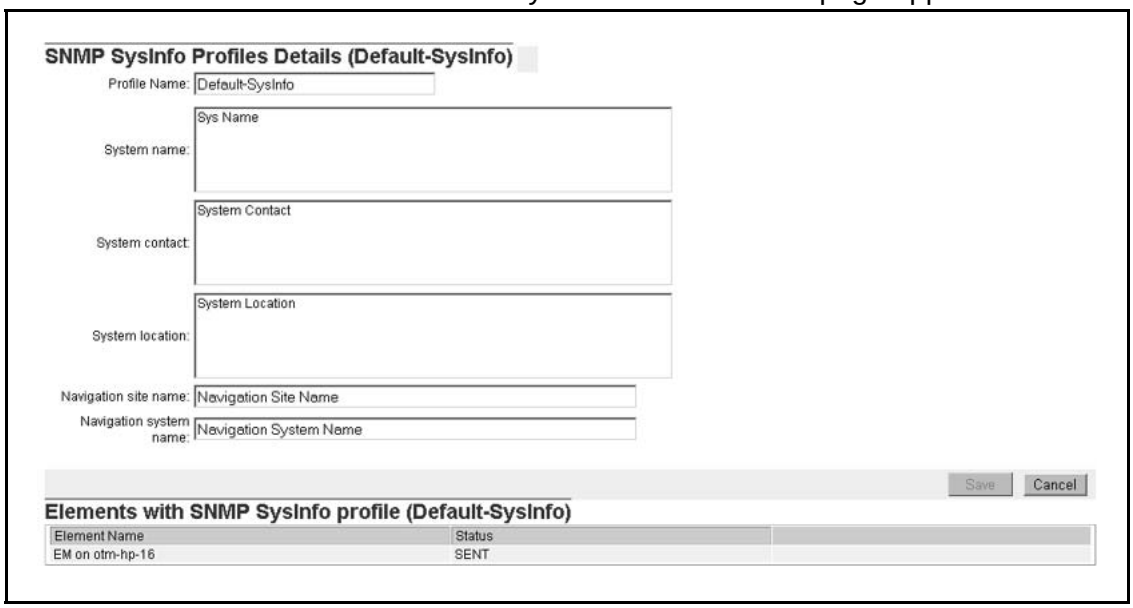

The top section of the page provides the profile details for editing.

2 Make the required changes to the fields in the profile details section.

3 Click **Save**.

The details are committed to the profile and propagated to the elements that currently use that profile.

The bottom section of the page lists the elements that are currently associated with the profile. Each element also displays

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

a status. When the elements are updated successfully with the changed profile data, the status appears as ASSIGNED. If an error occurs while updating profile to an element, the status appears as PENDING.

If you modify the profile name, the version number is set to 1.0. If the profile name is not changed but you make modifications to any field in the profile, the version number increments by 1.0.


--End--

Editing an ALARM SNMP profile

Use this procedure to edit an ALARM SNMP profile. Each SNMP profile is shown in the SNMP Profile Manager page as a link.

Step	Action
1	From the SNMP Profile Manager page, click the link of the ALARM profile to modify. ***Note:*** You cannot modify a custom or default profile. The SNMP Alarm Profiles Details page appears.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

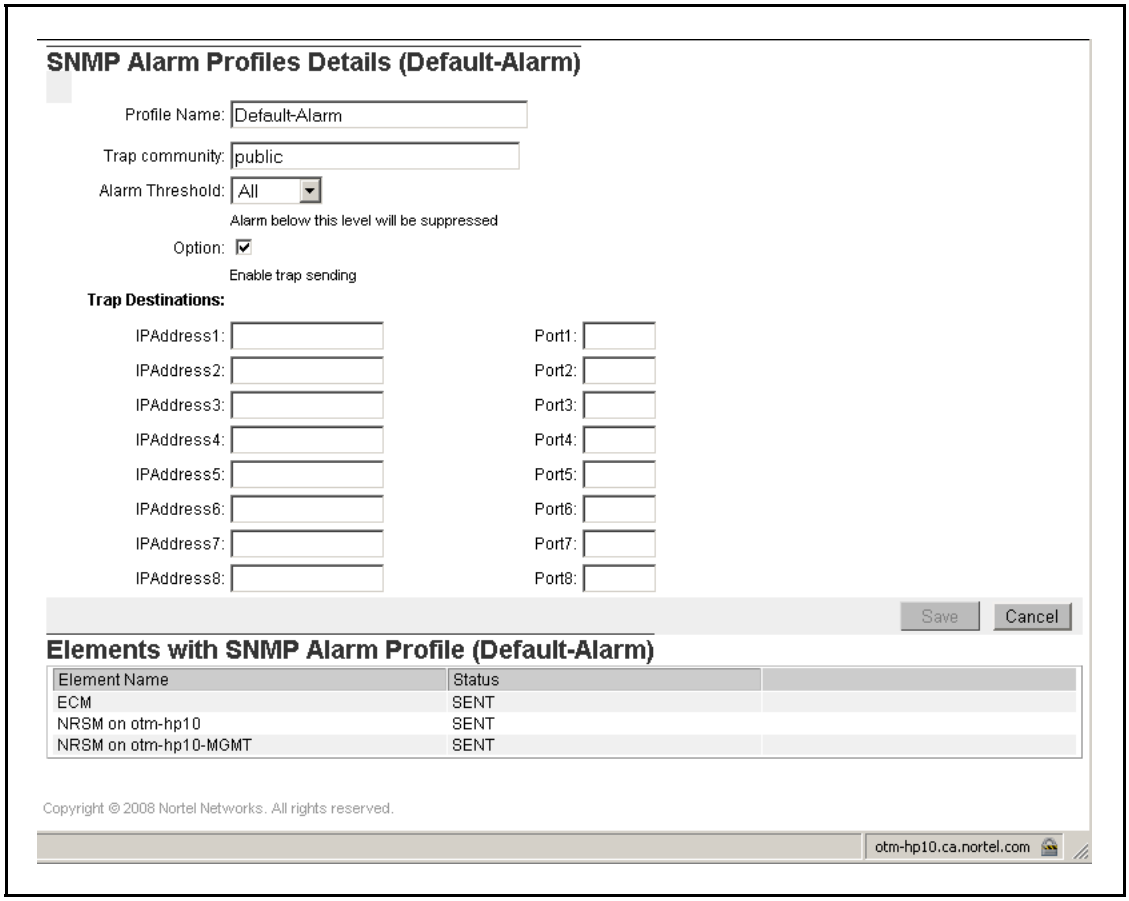

The top section of the page provides the profile details for editing.

2 Make the required changes to the fields in the profile details section.

3 Click **Save**.

The details are committed to the profile and propagated to the elements that currently use that profile.

The bottom section of the page lists the elements that are currently associated with the profile. Each element also displays a status. When the elements are updated successfully with the changed profile data, the status appears as ASSIGNED. If an error occurs while updating profile to an element, the status appears as PENDING.

If you modify the profile name, the version number is set to 1.0. If the profile name is not changed but you make modifications to any field in the profile, the version number increments by 1.0.

--End--

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Deleting a SNMP profile

Use this procedure to delete a SNMP profile using the SNMP Profile Manager.

Step	Action
1	From the SNMP Profiles list, select the profiles to delete.
2	Click **Delete**. If a profile selected for deletion is currently assigned to an element, a warning page appears stating that the profile is currently assigned and prompts for confirmation.
3	Click **OK** to delete the profile. Elements assigned to deleted profiles are assigned to the default profile. You cannot delete the default and custom profiles.


--End--

SNMP Profile Distribution

You can access the SNMP Profile Distribution page by clicking the **SNMP Distribution** link in the UCM navigator tree.

When you click the SNMP Profile Distribution link, the Target Group Selection page appears, as shown in Figure 13 "Target Group Selection page" (page 63).


Figure 13
Target Group Selection page

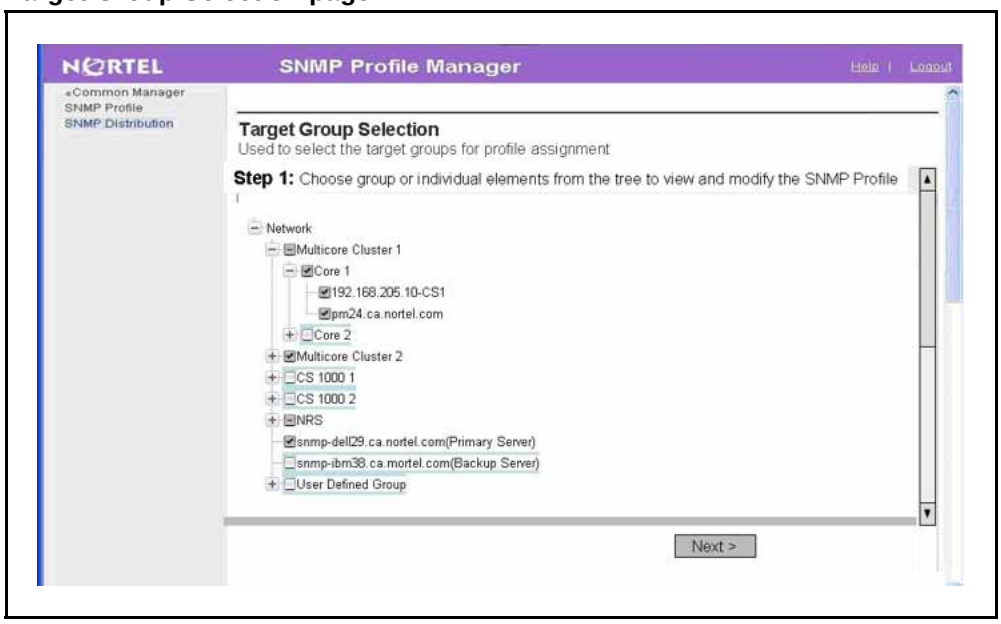

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

This page displays a list of system nodes in a navigation tree format. The nodes can be expanded to show the individual elements assigned to each node (only one node can be expanded at one time). Selecting a primary node causes the secondary nodes to be selected automatically. You can select up to a maximum of 500 elements. When you click **Next**, the SNMP Profile Distribution page appears, as shown in Figure 14 "SNMP Profile Distribution page" (page 64).

Figure 14
SNMP Profile Distribution page

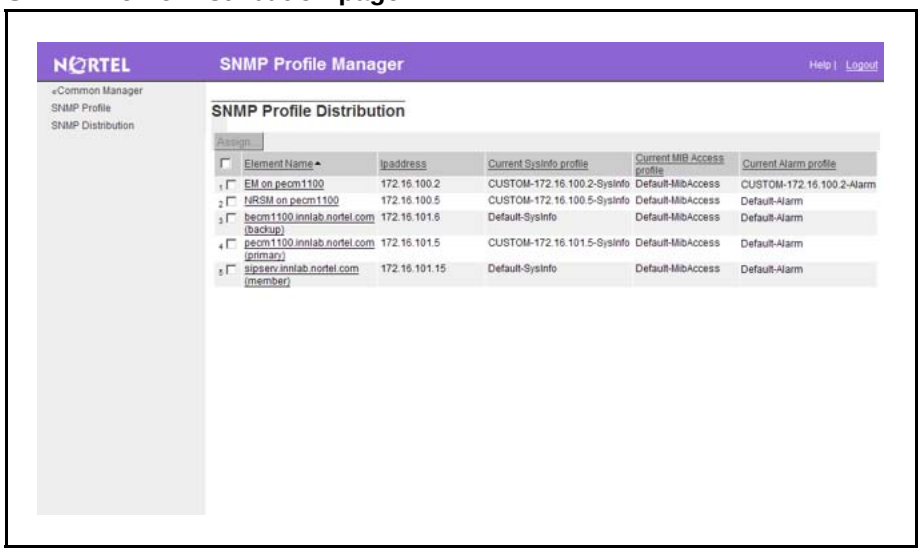

This page shows only Call Servers and the Primary and Member UCM servers. If a UCM server has an installed Signaling Server and an established PBXlink to a Call Server, it is not listed in the SNMP Profile Distribution Page because it receives SNMP parameters from the Call Server to which it is registered. This page displays the following information for the elements selected on the previous Target Group Selection page:

- Element Name
- IP address
- Current System Info profile
- Current MIB Access profile
- Current Alarm profile

From this page, you can assign profiles to elements. You can assign profiles to multiple elements. If you select a single element, the selections available in the Assign Profile Page list display only the currently

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

associated profiles. If you select multiple elements, the list displays the profiles in alphabetical order with an option to configure a common profile for all of the selected elements.

The selected element names appear at the top of the lists separated by commas. If the element names exceed two lines, the list is prefixed with "…" to indicate the names are incomplete.

Note: The SNMP Distribution page displays only Communication Server 1000 Release 6.0 and above elements. To configure SNMP parameters for devices installed for Releases prior to Release 6.0, you must use the respective SNMP configuration methods for those Releases.

Assigning SNMP profiles to elements

Use this procedure to assign SNMP profiles to elements.

Step	Action
1	From the UCM navigation menu, click **SNMP Profiles**.
2	Click **SNMP Profile Distribution**. The Target Group Selection page appears.
3	From the Target Group Selection page, select the elements to which you want to assign profiles. You can select elements within a group individually or select all elements within a group by selecting the top-level (parent) group.
4	Click **Next**. The SNMP Profile Distribution page appears.
5	From the SNMP Profile Distribution page, select the elements to which you want to assign profiles.
6	Click **Assign**. The SNMP Profile Distribution Details page appears, as shown in Figure 15 "SNMP Profile Distribution Details page" (page 66). From this page you can change any of the profiles shown in the SysInfo, MIB Access, or Alarm profile drop down lists. You can also click **View** to review the details of selected profiles.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Figure 15
SNMP Profile Distribution Details page



7 Click **Save** to apply the profiles to the selected elements.

--End--

SNMP configuration using Element Manager

This section describes how to use Element Manager to configure SNMP on the Call Server, Signaling Server, and IP Telephony devices. After you configure the SNMP parameters on the Call Server, the configuration synchronizes with the Signaling Server, Voice Gateway Media Cards, and Gateway Controllers. Use Element Manager to configure SNMP trap destinations and community strings for Communication Server 1000 systems.

Note: Elements running Media Application Server (MAS) require additional separate configuration. For more information, see "Media Application Server SNMP architecture" (page 31).

Any changes to SNMP parameters are detected by the SNMP Profile Manager in UCM, which creates a custom profile. A custom profile is created by the SNMP Profile Manager whenever SNMP parameters are configured using LD 117 or the SNMP configuration pages in Element Manager.

Note: If a Call Server already has an assigned profile from the SNMP Profile Manager, that profile is replaced with the custom profile. No warning message is displayed when a preassigned profile is replaced with a custom profile.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.


For information about community strings, see “Community strings” (page 45).

Configuring SNMP on the Call Server

Use this procedure to configure SNMP on the Call Server.

Step	Action
1	In the Element Manager navigator pane, choose **System > Alarms > SNMP**. The SNMP Configuration page appears, as shown in Figure 16 "Element Manager SNMP Configuration page" (page 67).

Figure 16
Element Manager SNMP Configuration page

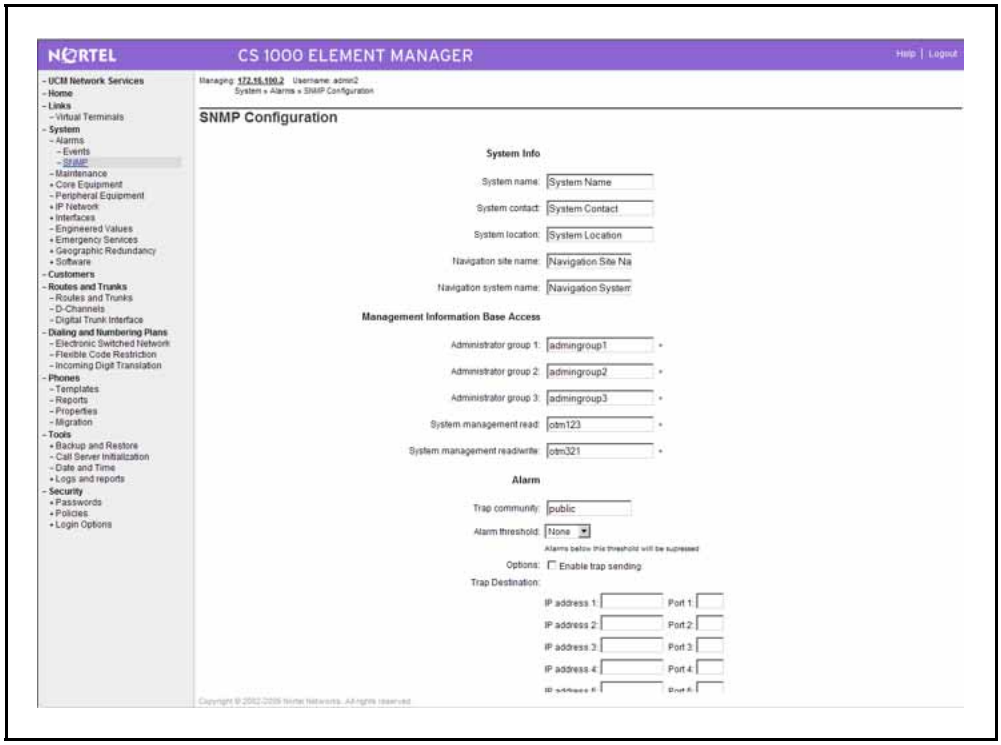

2 Obtain the following information from the system administrator and enter it in the appropriate fields.

- System Name (%hostname%)
- System Contact (SNMP_SYSCONTACT)
- System Location (SNMP_SYSLOC)
- Navigation Site Name (NAV_SITE)
- Navigation System Name (NAV_SYSTEM)
- Admin Groups 1-3 community strings (ADMIN_COMM).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

- System Management Read community string (SYSMGMT_RD_COMM)
- System Management Write community string (SYSMGMT_WR_COMM)
- System Management Trap community string (SYSMGMT_TRAP_COMM)
- SNMP trap destination addresses and ports

Note: All community strings, except the Trap community string, must be unique.

3 From the Alarm Threshold list, select the desired threshold. The options are Major, Minor, Critical, or None.

4 To enable trap sending, select the **Options** check box.

5 In the **Trap destination** fields, enter the IP addresses and ports of the trap destinations.

SNMP traps are sent to the IP addresses indicated here. If you do not specify a port for an IP address, port 162 is used as the default.

If applicable, add destination SNMP Manager IP addresses for the following:

- Point to Point Protocol (PPP) IP address configured in the router on the ELAN subnet
- SNMP manager for alarm monitoring

You can enter a maximum of eight trap destinations. They are numbered from 1 to 8.

Note: To remove a trap destination from the trap destination list, select the number from the list and delete the IP address from the IP address field.

6 Click **Save** to save and synchronize the configuration.

This action propagates the configuration settings to all network elements with an established PBXlink to the Call Server. It also propagates the configuration settings to UCM and replaces the profile associated with that Call Server with the custom profile in the SNMP Profile Manager. On the SNMP Distribution Page, a message appears indicating that the custom profile created through EM will replace the network level profile.

You can also click **Cancel** to cancel the entry.

--End--

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Traps

Contents

This chapter contains information about the following topics:

"Overview" (page 69)
- "Trap MIBs" (page 70)
- "Trap description" (page 70)
- "Trap format" (page 70)
- "Trap handling process" (page 71)

"IP Telephony traps" (page 72)
- "Viewing system error messages" (page 73)
- "View system error messages in CS 1000 systems" (page 73)

"Test trap tool for Linux Base" (page 73)

"Corrective actions" (page 75)

"Troubleshooting traps" (page 75)
- "Potential missing alarms" (page 75)

Overview

In general, a Meridian 1 or Communication Server 1000 SNMP trap contains the following data:

- ELAN IP address of the element from which the trap is generated
- error code (system message identifier)
- description of the condition that caused the trap to be generated
- severity
- component name
- event time
- event type

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Trap MIBs

A Common Trap MIB (**COMMON-TRAP-MIB.mib**) with trap OIDs provides a common format for all elements.

For more information, see “MIBs” (page 77).

Standard traps

In addition to the Nortel traps that are sent using the Common Trap format, other traps are sent by Communication Server 1000 elements, such as coldStart, warmStart, and other standard traps defined by RFC 1157. Linux devices send traps from the Net-SNMP agent, as defined in the NET-SNMP-AGENT-MIB, which is available at www.sourceforge.net. Traps in this class are handled by the NMS to detect changes in the state of the elements.

Trap description

The SNMP trap description provides the information about the type of error that occurs on the system which causes the trap to be generated. Refer to *Software Input/Output System Messages* (NN43001-712). The classification is based on the event category, such as ITG or ITS.

Software Input/Output System Messages (NN43001-712) also provides a list of critical traps that should be monitored by a SNMP monitoring system and which messages are sent as SNMP traps.

Trap format

This section describes the SNMP trap message format.

SNMPv1 message format

The SNMP traps generated from each element of the system are in SNMPv1 message format. A common trap MIB is defined so that traps from all elements are in a common format.

SNMPv1 messages contain two sections:

- message header
- Protocol Data Unit (PDU)

Message header

The message header has two fields:

- version number – specifies the version of SNMP used.
- community name – defines the members of an administrative domain and provides a simple method to control access. For more information, see “Community strings” (page 45).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Trap PDU

The trap PDU has eight fields:


- Enterprise – identifies the managed object type that generates the trap.
- Agent address – identifies the IP address of the managed object that generates the trap.
- Generic trap type – identifies the generic trap type.
- Specific trap code – identifies the specific trap code.
- Time stamp – identifies how much time elapses between when the last network initialization occurs and when the trap is generated.
- Variable bindings – identifies the data field. A variable binding associates a specific object instance with its current value. The value is ignored for the **`Get`** and **`GetNext`** commands.

See Figure 17 "SNMPv1 trap PDU fields" (page 71).

The number of digits in a system message code is usually three or four digits, but it can vary. Some message categories (the alphabetic portion of the system message identifier) have a variable number of digits, even for the same message category and can have either three or four digits in the output.

A message with three digits is converted to the four-digit format by adding a leading zero to the numeric portion of the message. For example, *SRPT194* is changed to *SRPT0194*. For more information about system messages, see *Software Input/Output System Messages* (NN43001-712).

Figure 17
SNMPv1 trap PDU fields

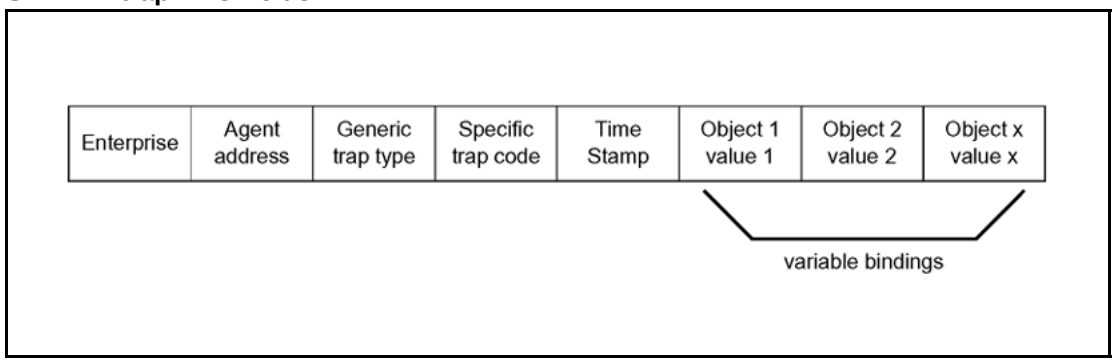

Trap handling process

Table 11 "Trap handling process" (page 72) describes the trap handling process.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 11
Trap handling process

Step	Description
1	The SNMP agent on all devices, including those on Linux systems, receives information about the alarm generated on the element.
2	The SNMP agent generates the SNMP trap and sends the trap to the designated IP addresses on the LAN.
3	Alarms generated as SNMP traps can sometimes generate a message to the serial port which are recorded in the log file. ***Note:*** Certain alarms on the Call Server are sent only to the serial port and are not generated as SNMP traps.

IP Telephony traps

The Signaling Server, Voice Gateway Media Card, and Gateway Controller issue specific trap types, such as ITG, ITS, and QOS. All other categories of traps are issued by the Call Server.

IP Phones do not support SNMP traps; however, the phones can cause ITS traps that are reported through the Signaling Server.

ITG and ITS trap format

ITG and ITS traps are in Common Trap MIB format, ITGsxxx or ITSsxxx, where sxxx is a four-digit number (for example, ITG3021).

The first digit of the four-digit number in the error message represents the severity category of the message. The severity categories are:

1 = Critical
2 = Major
3 = Minor
4 = Warning
5 = Info
6 = Indeterminate
7 = Cleared

Note: Message numbers beginning with zero do not follow this format.

For a detailed list of the ITG and ITS error messages, see *Software Input/Output System Messages* (NN43001-712).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Viewing system error messages

When an error or specific event occurs, in most cases, an alarm trap is sent to the configured SNMP trap destinations in the IP Telephony Card properties. In every case, the system error message is written into the error log file.

Three event categories of alarm traps sent by IP Telephony devices exist:

- ITG
- ITS
- QOS

View system error messages in CS 1000 systems

In Communication Server 1000 systems, a system error message is issued from the Signaling Server, Voice Gateway Media Card, or Gateway Controller and written into the error log file. View the error log file by using the CLI or Element Manager.

> ***Note:*** The system log file for a Voice Gateway Media Card or other IP Telephony device can also be viewed in any text browser after the file is uploaded to an FTP host by using the **`LogFilePut`** command.

Viewing the error log file using Element Manager Use Element Manager to view the alarm and Exceptionlog histories and the resident system reports for the following devices:

- Signaling Server
- Voice Gateway Media Cards
- Media Gateway Controllers

For more information about viewing logs and faults, see *Element Manager System Administration* (NN43001-632).

Test trap tool for Linux Base

System administrators can use a Linux base command to confirm if traps are being properly sent to the configured destinations. The **`sendSnmpTrap`** command generates a SNMP trap in Common-MIB format.

You must specify the full path when executing this command. The syntax for the command is as follows:

```
/opt/nortel/Snmp-Daemon-TrapLib/bin/sendSnmpTrap
<trap severity> <error code> <alarm type> <alarm data>
<component> <notification ID> <probable cause>
```


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Parameter	Description
<trap severity>	Numeric value indicating the severity of the trap. The following values are defined in common trap MIBs: • critical (1) • major (2) • minor (3) • warning (4) • info (5) • indeterminate (6) • cleared (7)
<error code>	Error code to be sent in trap, in the format AAA[A]NNNN, where: • A represents alphabetic characters • N represents numeric values
<alarm type>	Numeric value defining the type of alarm. Common trap MIB values are as follows: • communications (1) • qualityOfService (2) • processing (3) • equipment (4) • security (5) • operator (6) • debug (7) • unknown (8)
<alarm data>	String defining a description of the alarm. If using multiple words, enclose the entire string within double quotes. You do not need quotes for single words.
<component>	String denoting a component, in the format <Navigation System Name>:<Navigation Site Name>:<Component Name> If using multiple words, enclose the entire string within double quotes. You do not need quotes for single words.
<notification ID>	Integer denoting the unique ID for each generated trap, used for clearing alarms.
<probable cause>	Integer indicating the probable cause for the alarm. This value qualifies the alarm type field.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

The return values for the **sendSnmpTrap** command are as follows:

- 0—successful operation
- 1—failure
- 2—insufficient number of arguments
- 3-9—invalid argument, with 3 being the first argument, 4 the second argument, and so on.

Corrective actions

For information about problem detection and fault-clearing actions, see the following:

- *Communication Server 1000M and Meridian 1 Small System Maintenance* (NN43011-700)
- *Communication Server 1000M and Meridian 1 Large System Maintenance* (NN43021-700)
- *Communication Server 1000E Maintenance* (NN43041-700)
- *Software Input/Output System Messages* (NN43001-712)

Troubleshooting traps

This sections describes some suggestions for troubleshooting potential missing alarms.

Potential missing alarms

If the system has SNMP enabled, and the traps are not being received by the network management system, several possible causes and solutions exist.

- Check the provisioning to ensure that the correct IP address of the trap destination is configured on the system.
- Depending on how the trap was configured, use the CLI or Element Manager on the Call Server or SNMP Profile Manager to see if the trap has a lesser severity than the minimum severity threshold.
- SNMP traps are sent over UDP protocol, which does not guarantee delivery when the network is congested.
- Traps can be discarded or not accepted for several reasons, including network congestion, the SNMP Manager(s) not having the correct trap MIB loaded, or the SNMP Manager not being able to process the trap.
- Traps can be suppressed if issued too frequently.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

MIBs

Contents

This chapter contains information about the following topics:

"Overview" (page 77)

- "OID queries" (page 84)
- "Variable binding" (page 84)

"Supported MIBs" (page 84)

- "Entity group MIB" (page 98)

"Accessing MIBs" (page 99)

"Trap handling approaches" (page 100)

- "Directly accepting traps with Network Management Systems and HP OpenView" (page 100)
- "Enterprise Network Management System" (page 100) "Enterprise Network Management System" (page 100)

Overview

When using typical IP network devices, the operator requires a large amount of management information to properly run the device. This information is kept on the system and can be made available to network management systems through SNMP. The information itself is kept on the device (conceptually) in a database referred to as a Management Information Base (MIB). The network management system can query the MIB through SNMP query commands (called **`gets`**), and in some cases, can modify the MIB through SNMP **`set`** commands.

Note: The SNMP **`set`** commands to the MIB-II Group variables (for example, sysLocation, sysContact, and sysName) are not supported. The System Group variables are only configured through a management interface, such as Element Manager, and not with SNMP.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

For the Network Management System (NMS) to communicate with the agent on a managed device, the NMS must have a description of all manageable objects that the agent knows about. Therefore, each type of agent has an associated document called a MIB Module that contains these descriptions. MIB Module files are loaded into the NMS. MIB Modules are frequently referred to as MIBs. The primary purpose of the MIB module is to provide a name, structure, and a description for each of the manageable objects that a particular agent knows about.

Two kinds of MIB modules are used by the NMS:

- a generic MIB Module that describes the structure of the data that the NMS can retrieve
- a trap MIB Module that describes the structure of the data sent by the device agent as a SNMP trap

MIB data is arranged in a tree structure. Each object (each item of data) on the tree has an identifier, called an Object ID (OID), that uniquely identifies the variable. To prevent naming conflicts and provide organization, all major device vendors, as well as certain organizations, are assigned a branch of this tree structure referred to as the MIB Tree. The MIB Tree is managed by the Internet Assigned Numbers Authority (IANA). Each object on the MIB Tree has a number and a name, and the complete path from the top of the tree down to the point of interest forms the name.

An SNMP MIB must be written in ASN.1 format to conform with the SNMP standards.

ASN.1

ASN.1 stands for Abstract Syntax Notation version 1. ASN.1 is a standard regulated by the International Organization for Standardization (ISO) that defines the nodes (branches) of the MIB tree in a numeric manner. The path is designated by periods (.) rather than slashes (/), like those used in a directory path for files on a PC.

Example: .1.3.6.1.2.1.1.3

Table 12 "First four ASN.1 Object Types" (page 78) lists the Object Types for the first four numbers of an OID that uses ASN.1 syntax.

Table 12
First four ASN.1 Object Types

Number	Object Type	Description
1	iso	International Organization for Standardization.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 12
First four ASN.1 Object Types (cont'd.)

Number	Object Type	Description
2	org	Everything under this branch is an organization recognized by the ISO.
3	dod	Department of Defense.
4	internet	The node allocated by the DOD for the Internet community.

Below the internet node are four defined named nodes:

- directory(1)
- mgmt(2)
- experimental(3)
- private(4)

For most MIB objects on IP devices, the first four numbers are always .1.3.6.1.

After the first four numbers two main nodes (or branches) are used on IP devices:

1. mgmt(2) node – where the MIBs that are defined by standards organizations are found.
2. private(4) node – where vendors, such as Nortel, define their own private (or enterprise) MIB modules. Each vendor has a unique number assigned to it, therefore, the OID for any object uniquely identifies which vendor has implemented the MIB. The vendor ID for Nortel is 562.

Named nodes

Nodes are given both a number and a name. Mgmt is node two and private is node four. The OID is written with the node number in parentheses next to the Object Type.

Example: iso(1) org(3) dod(6) internet(1) mgmt(2)

that is equivalent to the numerical OID string of:

.1.3.6.1.2

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

The child node of mgmt(2) is mib(1). Many child nodes are under the mib(1) node. These child nodes represent related groups of internet protocols or concepts. If a SNMP agent supports a particular group, the agent is said to be compliant for that group.

Below the management category are several groups of management objects, including the following:

- system(1)
- interfaces(2)
- at(3)
- ip(4)
- icmp(5)

system group

The system group contains objects that describe some basic information about the SNMP agent or the network device object on which the agent is running. The combined agent and network device object is referred to as the entity. Table 13 "system objects" (page 80) lists some of the common objects in the system group.

Table 13
system objects

Object	Description
sysDescr	Description of the entity.
sysObjectID	Complete OID string defined by the vendor that created the entity. This object is used to quickly identify what kind of SNMP agent the application is talking to.
sysUpTime	Time (in hundredths of a second) since the network management portion of the system is last reinitialized.
sysContact	Contact person – usually the name of the person locally responsible for the entity.
sysName	Navigation Site Name: Navigation System Name: <HostName>.
sysLocation	System location.

Configuring the sysDescr OID string

The System group MIB contains a sysDescr OID with a specific format. The following sections describe the format in detail.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

sysDescr string format PR:"<product name>" SW:"<main application>" BN:"<full release number>" HW:"<hardware name>" (c) Nortel Networks

The format is a name-value pair of all applicable attributes, with the value portion enclosed in quotes for ease of parsing. You can omit attributes that do not apply, therefore firmware information (FW:) appears only for some Voice Gateway Media Cards. For example, firmware information appears for ITG-P and ITG-SA, but not for MC32S.

Where PR: is one of the following:

- Meridian 1
- CS 1000
- CS 1000M
- CS 1000E

Note: CS 1000E is the product name for MG 1000E.

Where SW: is one of the following:

- Call Server, Sys XXXX
- MG 1000B - Call Server, Sys XXXX
- VGMC
- Expansion Call Server - Normal mode, Sys XXXX
- Expansion Call Server - Survival mode, Sys XXXX
- Gateway Controller
- MG 1000E-SSC
- For Linux components, the SW field is populated as follows:

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

SW: <application installed>,<UCM server mode>

Note: If multiple applications are on the server, SW: pertains to the main use of the server. <application installed> can be one of the following (or blank if no application is installed):

- ***CS***
- ***CS1000HS-EM***
- ***SS_EM_SubM***
- ***BRIDGE***
- ***SubM***
- ***EM***
- ***SS***
- ***SS_EM***
- ***NRS***
- ***NRS+SS***
- ***NRS+SS_EM***
- ***CS+SS+EM***
- ***CS+SS+NRS+EM***
- ***SIPL***
- ***CS+SS+NRS+EM_SubM***

<UCM server mode> can be one of the following (or blank if no server is configured):

- ***Primary Security Server***
- ***Member server***
- ***Backup server***

Where BN: is one of the following:

- X.XXY for Call Server
- X.XX.XX for Signaling Server
- IPL-X.XX.XX for VGMC
- mgcYYYXX for Gateway Controller
- X.XX.XX for NRS/UCM on Linux (application CD version number)

Note: In the BN: value fields, X is a value from 0 to 9 and Y is a value from a to z.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Where HW: is one of the following:

- CP P4
- CP PM (Call Server)
- CP PM (Signaling Server)
- CP DC (Signaling Server)
- ITG-SA
- MGC
- MG XPEC
- CP MG
- MC32S
- HP DL320 for NRS/UCM on Linux
- IBM 306M for NRS/UCM on Linux
- HP-DL320-G4 for Signaling Server COTS
- IBM-x306m for Signaling Server COTS
- DELL R300
- MG 1010
- MG XPEC (NTDW20AAE6)
- SSMG (CP MG)

Examples:

PR: `"CS 1000E"` SW: `"Call Server, Sys 4021"` BN: `"6.0"` HW: `"CP-PM"` (c) Nortel Networks.

PR: `"CS 1000"` SW: `"SS_EM, Primary Security Server"` BN: `"6.00.11"` HW: `"IBM X3350"` (c) Nortel Networks.

(This example shows no application installed for SW field)
PR: `"CS 1000"` SW: `"Member Server"` BN: `"6.00.16"` HW: `"Nortel CPPMv1"` (c) Nortel Networks.

Example of an OID string

The OID string for the sysUpTime object is:

iso(1) org(3) dod(6) internet(1) mgmt(2) mib(1) system(1) sysUpTime(3)

or

.1.3.6.1.2.1.1.3

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

MIB abbreviations

Another way to write the previous example is:

::= { system 3 }

system(1) is already known as iso(1) org(3) dod(6) internet(1) mgmt(2) mib(1) system(1) or .1.3.6.1.2.1.1. It is only necessary to define how the sysUpTime object fits into the preexisting structure.

::= represents the .1.3.6.1.2.1 portion of the MIB.

The third object in the system(1) group is the sysUpTime object; therefore, it is defined as { system 3}.

OID queries

If an OID string is not complete down to the object—that is, if the string ends at a node instead of a specific object—this affects the results when the OID string is queried.

Example

.1.3.6.1.2.1.1

is equivalent to

iso(1) org(3) dod(6) internet(1) mgmt(2) mib(1) system(1)

If the string is queried, it returns the value for sysDescr, sysObjectID, sysUpTime, sysContact, and all the other objects within the system(1) node.

Variable binding

Variable binding is the pairing of a SNMP object instance name with an associated value. A variable binding list is a series of variable binding entries.

Supported MIBs

Table 14 "Supported MIBs" (page 85) lists the MIBs supported on the Communication Server 1000 and Meridian 1 systems. There is no difference between the enterprise-specific MIBs for Meridian 1 and Communication Server 1000 systems, except that there are no Signaling Server MIBs on Meridian 1 systems.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 14
Supported MIBs

	MIB-II groups	Other
Call Server	• System group (RFC 1213) • Interface group (RFC 2863) • IP group (RFC 2011) • UDP group (RFC 2013) • TCP group (RFC 2012) • ICMP group (RFC 2011) • SNMP group (RFC 3418) • Entity group (RFC 2737) (only the following two subgroups) — Physical — General • Host Resources group (RFC 2790) (only the following subgroups) — hrSystem group — hrStorage group — hrDevice group — hrSWRun group — hrSWRunPerf group ***Note:*** Only certain objects in the Host Resources subgroups are supported.	• Nortel Proprietary MIBs • QOSTRAFFIC-MIB—provides similar information as QOS-MIB on Signaling Server.
Voice Gateway Media Cards and Media Gateway Controllers	• System group (RFC 1213) • Interface group (RFC 2863) • IP group (RFC 2011) • UDP group (RFC 2013) • TCP group (RFC 2012) • ICMP group (RFC 2011) • SNMP group (RFC 3418) • Host Resources group (RFC 2790)	• QOS-MIB.mib ***Note:*** QOS-MIB.mib is also known as Zonetrafficrpt MIB - Signaling Server only.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 14
Supported MIBs (cont'd.)

	MIB-II groups	Other
	(only the following subgroups) — hrSystem group — hrStorage group — hrDevice group — hrSWRun group — hrSWRunPerf group ***Note:*** Only certain objects in the Host Resources subgroups are supported.	
Linux		• UCD-SNMP-MIB

Table 15 "Definition of MIBs" (page 86) defines the various MIBs.

Table 15
Definition of MIBs

MIB	Definition
Call Server MIB	
System group	Provides information about the system name, location, contact, description, object ID, and uptime. Only the System group can be provisioned. All the other groups are read-only. The following OIDs are supported: sysDescr, sysObjectID, sysUpTime, sysContact, sysName, and sysLocation. The default values for the system group are: **sysDescr:** See "Configuring the sysDescr OID string" (page 80) for a description and examples of the sysDecscr OID. **sysObjectID:** `.1.3.6.1.4.1.562.3`(.iso.org.dod.internet.private.enterprises.nt.meridian) **sysContact:** System Contact

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	sysName: Navigation Site Name: <HostName> **sysLocation:** System Location
Interface group	Provides information about the network interfaces on the system, such as description, physical address, and speed. Also provides statistics and data, such as the number of in/out packets and discarded packets.
IP group	Provides information about the IP stack, such as default TTL and IP addresses. No provisioning is required for this group. The SNMP agent gathers this information automatically.
UDP group	Provides information about the UDP stack, such as UDP port numbers and errors.
TCP group	Provides information about the TCP stack, such as routing algorithm and TCP port numbers.
ICMP group	Consists of counters that measure the rates at which Internet Control Message Protocol (ICMP) messages are sent and received using ICMP protocol. It also includes counters that monitor ICMP protocol errors.
SNMP group	A collection of objects providing basic information and control of a SNMP entity, such as: • total number of messages delivered to the SNMP entity from the transport service • total number of SNMP messages delivered to the SNMP entity for an unsupported SNMP version
Entity group	Provides information about the physical inventory of the system, such as component information, relationships between components, and relationships to logical interfaces. The following groups of the Entity MIB are supported: • Entity Physical Group: provides information about the hardware components such as description, vendor type, and name and covers the following objects: — entPhysicalDescr — entPhysicalVendorType — entPhysicalContainedIn

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	— entPhysicalClass — entPhysicalParentRelPos — entPhysicalName — entPhysicalHardwareRev — entPhysicalFirmwareRev — entPhysicalSoftwareRev — entPhysicalSerialNum — entPhysicalMfgName — entPhysicalModelName — entPhysicalAlias — entPhysicalAssetID — entPhysicalFRU • Entity General Group: provides information about the last time any changes are made in the Entity Physical Group, in the format of sysUpTime. Entity General Group covers the following object: — entLastChangeTime
Host Resources group	Defines a uniform set of objects useful for the management of host devices. The host devices are independent of the operating system, network services, and software applications. The Host Resources MIB lets a Network Management System (NMS) obtain information about the host device, including the following: • system properties • memory management and utilization • devices attached to the host device and details about the attached devices • performance of the applications on the host device The following subgroups are supported: hrSystem Group, hrStorage Group, hrDevice Group, hrSWRun Group, and hrSWRunPerf Group. **hrSystem Group:** • hrSystemUptime Amount of time since the host (Call Server) is last initialized. Shows the time elapsed since the host is last rebooted. The value is in the form of time ticks elapsed and is determined by

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	comparing the present local time and the time when the Call Server is last warm- or cold-booted. • hrSystemDate Date and time presently shown by the Call Server, displayed in octet format. • hrInitialLoadDevice The device from which the host (Call Server) is booted. The return value is always one because the Call Server always boots from the Hard Disk. • hrInitialLoadParameters Parameters supplied to the device while the host is booted. The path of the file from which the Call Server boots is provided. • hrSystemNumUsers Number of user sessions for which the host (Call Server) stores the state information; it describes the number of connection sessions (for example, Telnet, Rlogin, SSH, FTP) presently occupied in the Call Server. • hrSystemProcesses List of process contexts currently loaded or running on the Call Server. For example, it lists the tasks such as ttimer, tSNMP, and tScriptMgr that are presently running in the Call Server. • hrSystemMaxProcess The maximum number of tasks that the Call Server can support at the same time. **hrStorage Group:** • hrMemorySize Amount of physical RAM in the Call Server in units of Kilobytes. • hrStorageTable Table of logical storage areas on the host, as seen by an application. A useful diagnostic for *out of memory* and *out of buffers* types of failures. — hrStorageIndex A unique value for each logical storage area contained by the host. — hrStorageType Type of storage. Storage types can be Flash Memory, RAM, or PC Card. Value is returned as hrStorageRam or hrStorageFlashMemory for the Call Server, depending on what storage types are present.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	— hrStorageDescr Name of the storage device. All storage devices available in the Call Server are listed. — hrStorageAllocationUnits Size, in bytes, of the data objects allocated from this pool. If this entry is monitoring sectors, blocks, buffers or packets, for example, this number is usually greater than one. Otherwise, this value is typically one. Example of a return value is 65536 bytes for virtual memory. — hrStorageSize Size of storage in units of hrStorageAllocationUnits. — hrStorageUsed Storage that is allocated in units of hrStorageAllocationUnits. Value is the memory utilized given in hrStorageAllocationUn its. — hrStorageAllocationFailures Always returns a value of zero. Nortel recommends that you use the following space utilization thresholds when you monitor disk drives. Values greater than these can result in system problems. • /d, /u: 85% (/d is the real partition name; software uses /u), used for data storage and patching • /e: 85%, logging and temporary space for the CCBR back-up compression process • /boot: boot partition, no need to monitor • /p: protected partition for software installation, no need to monitor • cd0: cd drive, no need to monitor • f0: floppy drive, no need to monitor • /cf2: face plate compact flash, no need to monitor • SSC c: 85% • SSC z: 85%, this is an archive drive. The drive is formatted before it is used. The database is copied, then patches (where patch copy is best effort) until the drive is full. • SSC a: PCMCIA a, do not monitor • SSC b: PCMCIA b, do not monitor

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	hrDevice Group: Useful for identifying and diagnosing the devices on a system. In addition, some devices have device-specific tables for more detailed information. • hrDeviceTable Conceptual table of devices contained by the host. — hrDeviceIndex A unique value for each device contained by the host. — hrDeviceType Type of device associated with the host. Example is hrDeviceProcessor for which a corresponding conceptual table is created called hrProcessorTable. — hrDeviceDescr Textual description of this device. This description is the same as that of sysDescr in the System group MIB. — hrDeviceID Product ID of the device attached to the host (Call Server). This ID is the same as that of sysObjectid in the System group MIB. — hrDeviceStatus Current status of the device. — hrDeviceError Error value in the device. Output is zero if the device is running. • hrDiskStorageTable — hrStorageIndex Unique value for each logical storage device contained by the host. — hrDiskStorageAccess Indicates if the fixed storage device in the Call Server is read/write or read-only. — hrDiskStorageMedia Type of media used in the long-term storage device in Call Server. It can be hard disk, floppy disk, or CD-ROM. — hrDiskStorageRemoveable Disk Storage removal indication. Indicates whether the storage media can be removed from the Call Server. For example, the CD-ROM can be removed from Call Server, so

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	its return value is *true*; the hard disk cannot be removed, so its return value is *false*. — hrDiskStorageCapacity Total size of the storage media. If the storage media is removable and is currently removed, the value is zero. • hrProcessorTable Table of processors contained by the host. — hrProcessorFrwID Product ID of the firmware associated with the processor. The object identifier of the Call Server is used for this object value. — hrProcessorLoad This description applies to Call Servers on VxWorks platforms as CPU utilization is displayed on Call Servers using Linux. An idle task on the Call Server takes up spare CPU cycles, so a raw CPU utilization value is always 100%. Instead of using a raw CPU utilization value, the value returned for hrProcessorLoad is the percentage of the rated call capacity used during a 30 second interval. This value is not available until 24-hours after a system restart, because the percentage of the rated call capacity is calculated over a 24-hour period. In that 24-hour window, only negative values are returned until the correct value is available. There may be other conditions under which the rated call capacity cannot be computed. For example, continuous heavy traffic load on the system can produce insufficient cycles to determine the rated call capacity; this causes negative values to be returned. Rated call capacity is 70% of peak call capacity; therefore the hrProcessorLoad value could exceed 100% in heavy load conditions. Due to the nature of the statistical computation of the rated call capacity and the short period of measurement, values significantly higher than 100% can be seen at times (for example, 300%). This can be the result of a large number of calls during the 30 second interval of measurement. Traffic report TFS004 gives a measurement of the percentage of call capacity used over a period of an hour and should be examined if hrProcessorLoad returns unusually high values. TFS004 is a more reliable measure of processor usage. Measurements in excess of 80% on a sustained basis (for example, after the system runs on a stable basis for some time) can require action, and sustained measurements of over 100% can lead to outages. For more information about rated call capacity see

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	the TFS004 Processor Load documentation in *Traffic Measurement Formats and Output Reference* (NN43001-750).
	hrSWRun Group: • hrSWRunTable Contains an entry for each distinct piece of software that is running or loaded into physical memory in preparation for running. Includes the operating system, device drivers, and applications of the host device. — hrSWRunIndex Unique value for each piece of software running on the host, displayed as sequential integers. — hrSWRunName Textual description of this running piece of software, including the name by which it is commonly known. — hrSWRunID Product ID of this running piece of software (similar to hrSWRunIndex). — hrSWRunType Type of software. Values are unknown(1), operatingSystem(2), deviceDriver(3), and application(4). — hrSWRunStatus Status of this running piece of software. Values are: i. running(1) ii. runnable(2) but waiting for resource (such as CPU, memory, IO) iii. notRunnable(3) – loaded but waiting for event iv. invalid(4) – not loaded ***Note:*** Values are read-only.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	hrSWRunPerf Group: Contains an entry corresponding to each entry in the hrSWRunTable. To implement the hrSWRunPerf Group, the hrSWRunGroup must be supported. • hrSWRunPerfCPU Number of centi-seconds of CPU resources consumed by the Call Server for this process. • hrSWRunPerfMemory Total amount of the real memory allocated to the Call Server for this process.
QOSTRAFFIC MIB group	QOSTRAFFIC-MIB provides information similar to the Zone Traffic reports generated by QOS-MIB on the Signaling Server. Both interzone and intrazone traffic reports are provided.
Signaling Server MIB	
System group	Provides information about the system contact, description, and object ID. Only the System group can be provisioned. All the other groups are read-only. The default values for this system group are: The following OIDs are supported: sysDescr, sysObjectID, and sysContact. The default values for the system group are: **sysDescr:** See "Configuring the sysDescr OID string" (page 80) for a description and examples of the sysDecscr OID. **sysObjectID:** .1.3.6.1.4.1.562.3.14 (.iso.org.dod.internet.private.enterprises.nt.meridian.linuxplatform) **sysContact:** System Contact
Interface group	See the Call Server MIB Interface group description in this table.
IP group	See the Call Server MIB IP group description in this table.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
UDP group	See the Call Server MIB UDP group description in this table.
TCP group	See the Call Server MIB TCP group description in this table.
ICMP group	See the Call Server MIB ICMP group description in this table.
SNMP group	See the Call Server MIB SNMP group description in this table.
Host Resources group	The default implementation of the HR MIB is used.
QOS MIB group	Defined by QOS-MIB.mib. Presents the QOS-related data from LD 2, System Traffic Report 16. For information about the System Traffic Report 16, see *Traffic Measurement Formats and Output Reference* (NN43001-750). ***Note:*** The QOS-MIB.mib is also known as the Zonetrafficrpt.mib. The QOS-MIB.mib consists of traffic parameters for zones provisioned on the Call Server. There are two sets of parameters: intrazone parameters and interzone. Each parameter is assigned an Object ID in the MIB. The QOS-MIB.mib is a part of the NT node and subtends off the Signaling Server in the object ID tree structure. The object ID sequence for the QOS group MIB is .1.3.6.1.4.1.562.3.21.6. ***Note:*** In previous releases, an LAPW user account (snmpqosq) was required for QOS-MIB access. This account is no longer required.
Voice Gateway Media Card MIB	
System group	Provides information about the system name, contact, description, and object ID. Only the System group can be provisioned. All the other groups are read-only. The following OIDs are supported: sysDescr, sysObjectID, sysContact, and sysName. The default values for the system group are: **sysDescr:** See "Configuring the sysDescr OID string" (page 80) for a description and examples of the sysDescr OID.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	sysObjectID: .1.3.6.1.4.1.562.3.11.5(.iso.org.dod.internet.private.enterprises.nt.meridian.itg.iplmib) **sysContact:** System Contact **sysName:** <Voice Gateway Media Card host name> <TN>
Interface group	See the Call Server MIB Interface group description in this table.
IP group	See the Call Server MIB IP group description in this table.
UDP group	See the Call Server MIB UDP group description in this table.
TCP group	See the Call Server MIB TCP group description in this table.
ICMP group	See the Call Server MIB ICMP group description in this table.
SNMP group	See the Call Server MIB SNMP group description in this table.
Host Resources group	See the Call Server MIB Host Resource group description in this table (all references to the host or Call Server are considered to be references to the Voice Gateway Media Card).
Media Gateway Controller(MGC)	
System group	Provides information about the system description, object ID, and contact. Only the System group can be provisioned. All the other groups are read-only. The following OIDs are supported: sysDescr, sysObjectID, and sysContact. The default values for the system group are: **sysDescr:** See "Configuring the sysDescr OID string" (page 80) for a description and examples of the sysDecscr OID. **sysObjectID:** .1.3.6.1.4.1.562.3.7 (.iso.org.dod.internet.private.enterprises.nt.meridian.mgc) **sysContact:** System Contact
Interface group	See the Call Server MIB Interface group description in this table.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
IP group	See the Call Server MIB IP group description in this table.
UDP group	See the Call Server MIB UDP group description in this table.
TCP group	See the Call Server MIB TCP group description in this table.
ICMP group	See the Call Server MIB ICMP group description in this table.
SNMP group	See the Call Server MIB SNMP group description in this table.
Host Resources group	See Call Server MIB Host Resource group description in this table (all references to the host or Call Server are considered to be references to the MGC).
Linux NRS and UCM	
System group	Provides information about the system name, location, contact, description, object ID, and uptime. Only the System group can be provisioned. All the other groups are read-only. The following OIDs are supported: sysDescr, sysObjectID, sysContact, sysName, and sysLocation. The default values for the system group are: **sysDescr:** See "Configuring the sysDescr OID string" (page 80) for a description and examples of the sysDecscr OID. **sysObjectID:** For NRS: .1.3.6.1.4.1.562.3.12 (.iso.org.dod.internet.private.enterprises.nt.meridian.nrs) For EM or UCM: .1.3.6.1.4.1.562.3.13 (.iso.org.dod.internet.private.enterprises.nt.meridian.ecm) For all other installations: .1.3.6.1.4.1.562.3.14 (.iso.org.dod.internet.private.enterprises.nt.meridian.linuxplatform) **sysContact:** System Contact **sysName:** System Name

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 15
Definition of MIBs (cont'd.)

MIB	Definition
	sysLocation: System Location
Interface group	See the Call Server MIB Interface group description in this table.
IP group	See the Call Server MIB IP group description in this table.
UDP group	See the Call Server MIB UDP group description in this table.
TCP group	See the Call Server MIB TCP group description in this table.
ICMP group	See the Call Server MIB ICMP group description in this table.
Interface group	See the Call Server MIB SNMP group description in this table.
Host Resources MIB	The default implementation of the HR MIB supplied by the Net-SNMP agent is used.

Entity group MIB

At system startup, the Entity MIB receives information about all system hardware (such as common equipment, loops, cards, IP Phones) detected and configured in the system. If a Midnight Routine is configured in LD 117 (**INV MIDNIGHT SETS/CARDS/ALL/NONE**), then the MIB is updated daily as part of the Midnight Routine inventory.

If the Midnight Routine inventory is configured only for IP Phones (**SETS**), then only inventory information on IP Phones is updated daily; if only configured for cards, then only card inventory information is updated daily. If the Midnight Routine inventory is configured for all devices, then all inventory information is updated. If the Midnight Routine is not configured at all, no updates to the Entity MIB are made.

The Entity MIB is updated immediately if an IPE card is inserted or removed or if an IP Phone registers or unregisters from the Call Server.

When one of these hardware changes is detected, the inventory of the corresponding hardware entities is completely updated. For example, if an IP Phone registers or unregisters, the inventory for all telephones (digital telephones and IP Phones) is updated. If a Digital Line Card is removed, the inventory for all cards (and loops, common equipment, and so on) is updated.

The inclusion of the telephones in the Entity MIB is configured in LD 117. See Table 16 "LD 117 telephone inventory in Entity MIB command" (page 99).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 16
LD 117 telephone inventory in Entity MIB command

=> Command	Description
INV ENTITY SETS	
ON	Turns ON the inclusion of digital telephones and IP Phones in the Entity MIB.
(OFF)	Turns OFF the inclusion of digital telephones and IP Phones in the Entity MIB.
STATUS	Displays whether or not the digital telephones and IP Phones are included in the Entity MIB. Either ON or OFF appears in the output.

Accessing MIBs

ATTENTION
Communication Server 1000 Release 7.0 enterprise-specific MIBs are

- COMMON-TRAP-MIB.mib
- QOS-MIB.mib (also known as the Zonetrafficrpt.mib)
- QOSTRAFFIC-MIB.mib (Call Server implementation of QOS-MIB.mib)

Download the latest version of the MIBs for Nortel products from www.nortel.com.

Follow the steps in "Downloading the MIBs from the Nortel Web site" (page 99) to download the MIBs.

Downloading the MIBs from the Nortel Web site

Step	Action
1	Under the **Support & Training** banner, choose **Technical Support > Software Downloads**.
2	Click the **Browse product support** tab.
3	In **1. Select From**, choose a product family. Meridian 1 and Communication Server 1000 MIBs are found under **Communication Servers - Enterprise Communication Servers**.
4	In **2... Select a product**, choose a system type.
5	In **3... and get the content**, choose **Software**.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

6 The MIBs are found in the downloadable software list.

--End--

Trap handling approaches

Nortel recommends that you use a Network Management System (NMS) to accept traps directly from the system components. Use a NMS (for example, HP OpenView) to accept traps directly from the Communication Server 1000 system components.

To understand the structure of the traps that are sent from the system components, the NMS usually requires that the trap MIB modules are loaded into the NMS. The MIBs from each Communication Server 1000 or Meridian 1 component must be loaded into the NMS. See the **Attention** dialog box in "Accessing MIBs" (page 99) for the required MIB modules.

See also "Directly accepting traps with Network Management Systems and HP OpenView" (page 100).

As an alternative to a NMS, you can use the Visualization Performance and Fault Manager (VPFM) product to accept traps and provide additional fault management capabilities.

Directly accepting traps with Network Management Systems and HP OpenView

This section contains information about how to accept traps directly when using NMS, HP OpenView, or third-party management systems.

Enterprise Network Management System

The Enterprise NMS can accept traps directly from the Communication Server 1000 systems.

HP OpenView

The common trap MIB (**COMMON-TRAP-MIB.mib**) is used to enable HP OpenView to accept traps directly from the Communication Server 1000 devices. For more information, see "Configuring SNMP alarms in HP OpenView NNM" (page 105).

Third-party NMSs

If neither Enterprise NMS or HP OpenView NMS is used, the common trap MIB must be used in the trap-handling process of the third-party NMS.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Appendix Administration

Contents

This chapter contains information about the following topics:

"EDT and EPT" (page 101)

"Backup and restore" (page 102)

"LD 43" (page 102)

"LD 143" (page 103)

EDT and EPT

The Event Default Table (EDT) and Event Preference Table (EPT) are repositories on the Call Server for storing system event information.

The EDT contains a list of system events and default event severities that the system generates. Each event contains an event code, a description, and severity information. Data in the EPT overrides the severity of an event assigned in the EDT. You can use the EPT to configure escalation thresholds and suppression thresholds for certain event severities.

The maximum number of entries allowed in the EPT is 500.

Use LD 117 commands to import and export an EPT file from/to removable media, to load an updated EPT file into memory, and to print the EDT and EPT entries. See Table 17 "LD 117 EDT and EPT commands" (page 101).

Table 17
LD 117 EDT and EPT commands

=> Command	Description
EXPORT EPT	The EPT file stored on the hard disk (/u/db/ smpserv.db) is copied to the floppy/PC Card drive (a:/smpserv.db).
IMPORT EPT	The EPT file stored on the floppy/PC Card (a:/smpserv.db) drive is copied to the hard drive (/u/db/smpserv.db).

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 17
LD 117 EDT and EPT commands (cont'd.)

=> Command	Description
RELOAD EPT	The new/modified EPT file is loaded into memory from disk (/u/db/smpserv.db).
PRTS EPT <severity> [<eventID> <eventID>]	The entries in the EPT can be listed based on the severity field for all entries or the specified range of entries. The severity can be INFO, MINOR, MAJOR, or CRITICAL.
PRTS EDT <severity> [<eventID> <eventID>]	The entries in the EDT can be listed based on the severity field for all entries or the specified range of entries. The severity can be INFO, MINOR, MAJOR, or CRITICAL.

The EPT file is created when data is entered in the EPT and an EDD is performed. The EDD must be done prior to exporting the EPT file with the **EXP EDD** command. Error messages are issued if the import or export of the EPT file is not successful.



WARNING
When the EPT file is exported to a management workstation, the EPT file must not be modified using a text editor or spreadsheet application. If the EPT file is modified offline, it does not import correctly on the switch. The only supported way to modify the EPT file is through LD 117 or Element Manager.

Backup and restore

LD 43

The LD 43 commands listed in Table 18 "LD 43 backup and restore commands" (page 103) enable a backup and restore of the Call Server system group MIB variables, System Navigation variables, community strings, and other data.

On Linux systems, backup and restore is performed using the **sysbackup** and **sysrestore** commands.

ATTENTION
In Communication Server 1000 Release 5.5 and earlier, BKO backups to external storage devices do not retain EPT flags. Therefore, if you perform a restore operation using backup data from a Communication Server 1000 Release 5.5 or earlier system, the following parameters must be reconfigured:

- Alarm suppression threshold (CHG SUPPRESS_ALARM)
- Global suppression value (CHG SUPPRESS)
- Global timer window (CHG TIMER)
- EDT mode (CHG EDT)

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

If the data being restored is from a Communication Server 1000 Release 6.0 or higher system, the settings for these parameters are retained and no reconfiguration is required.

Table 18
LD 43 backup and restore commands

=> Command	Description
EDD	The Call Server system group MIB variables, System Navigation variables, community strings, Trap community strings, and other data are dumped to disk as a file when this command is executed. As well, this file is backed up to the A: drive floppy (Large Systems) or to the internal Z: drive (Small Systems).
BKO	The new file created to store the system group MIB variables, System Navigation variables, community strings, and other data is copied from the primary device to the backup (external storage) device.
RES	The new file created to store the system group MIB variables, System Navigation variables, community strings, and other data is restored from the backup (external storage) device to the primary device.
RIB (Small Systems only)	The new file created to store the system group MIB variables, System Navigation variables, community strings, and other data is restored from the internal backup device to the primary device.

LD 143

The LD 143 commands listed in Table 19 "LD 143 Small System backup and restore commands using a PC Card" (page 103) are part of the LD 143 Small System Upgrade Utilities menu. Select Option 2 to archive (backup) the system group MIB variables, System Navigation variables, community strings, and other data to a PC Card.

Table 19
LD 143 Small System backup and restore commands using a PC Card

=> Command	Description
2. **Archive Customer-defined databases.**	The new file created to store the system group MIB variables, System Navigation variables, community strings, and other data is archived on the PC Card.
3. **Install Archived database.**	The new file created to store the system group MIB variables, System Navigation variables, community strings, and other data is installed from an archive on the PC Card.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

The LD 143 Large System-specific commands listed in Table 20 "LD 43 Large System backup and restore commands using floppy disks" (page 104) enable the backup and restore of the system group MIB variables, System Navigation variables, community string, and other data using floppy disks.

Table 20
LD 43 Large System backup and restore commands using floppy disks

=> Command	Description
ABKO	The new file created to store the system group MIB variables, System Navigation variables, community strings, and other data is backed up to floppy disks.
ARES	The new file created to store the system group MIB variables, System Navigation variables, community strings, and other data is restored from floppy disks.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Appendix Configuring SNMP alarms in HP OpenView NNM

Contents

This appendix contains information about the following topics:

"Overview" (page 105)
- "Trap MIBs" (page 105)
- "Alarms" (page 105)

"Using HP OpenView to accept traps" (page 106)
- "Configuring events" (page 106)

"Alarm logging and viewing" (page 108)
- "Alarm Log" (page 108)
- "Other tools" (page 108)

Overview

This section provides information on how to load and configure traps in HP OpenView Network Node Manager (NNM).

Trap MIBs

The trap MIB files specify the format of the SNMP alarms that can be sent by the system devices.

By using the format information, HP OpenView can decode and display device alarm information in an easy-to-read manner.

Alarms

Alarms contain nine information fields, also known as *attributes*, as described in the MIB modules.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Using HP OpenView to accept traps

This section contains details about how to use HP OpenView to accept traps and how to use and view the alarm logs.


Configuring events

Follow the steps in “Configuring events” (page 106) to configure events in HP OpenView.

Configuring events

Step	Action
1	In the **Root** window, choose **Options > Event Configuration**. See Figure 18 "Root window to Event Configuration" (page 106).


Figure 18
Root window to Event Configuration

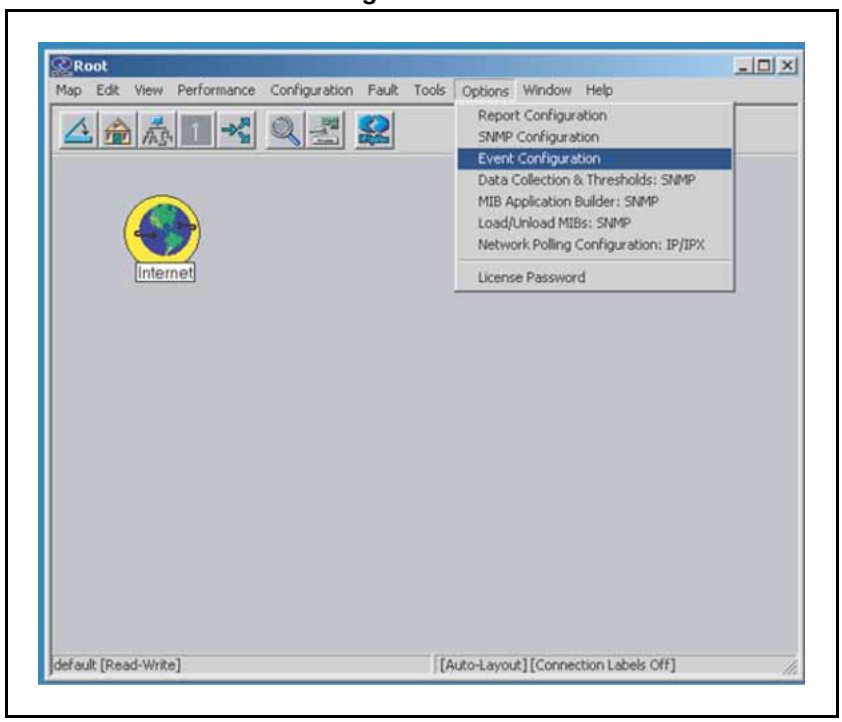

	The **Event Configuration** window appears. See Figure 19 "Event Configuration and Enterprises window" (page 107).
2	From the list in the **Enterprises** pane, choose the Enterprise trap MIB. In this example, it is **mgmt-traps**.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Figure 19
Event Configuration and Enterprises window

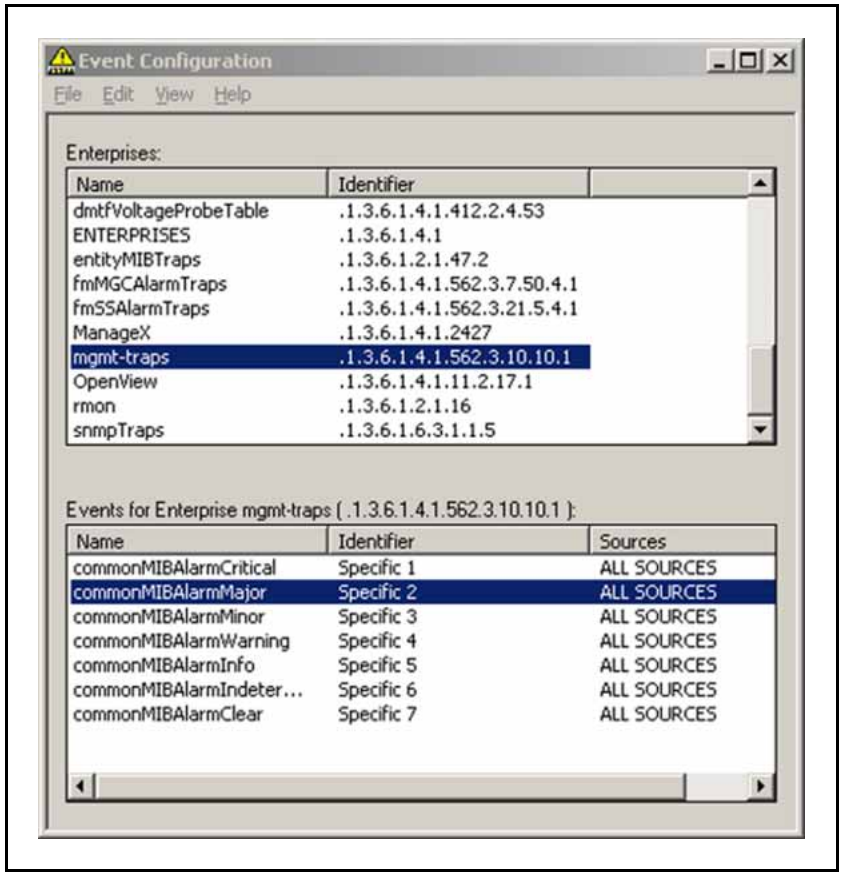

There are seven possible events that can be configured for the Enterprise example mgmt-traps. For each event, configure the actions to be taken if the event occurs.

3 Choose an event to configure and double-click it.

OR


In the upper menu, choose **Edit > Events > Modify**.

The **Modify Events** window appears. See Figure 20 "Modify Events window" (page 108).

4 Configure the event as desired on the various tabs. For example, in the **Event Log Message** text box, shown in Figure 20 "Modify Events window" (page 108), type **$10** to specify that the 10th alarm attribute is to be displayed in the log file. The alarm attribute is the text data of the alarm. Display other attributes by entering the appropriate attribute code.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Figure 20
Modify Events window

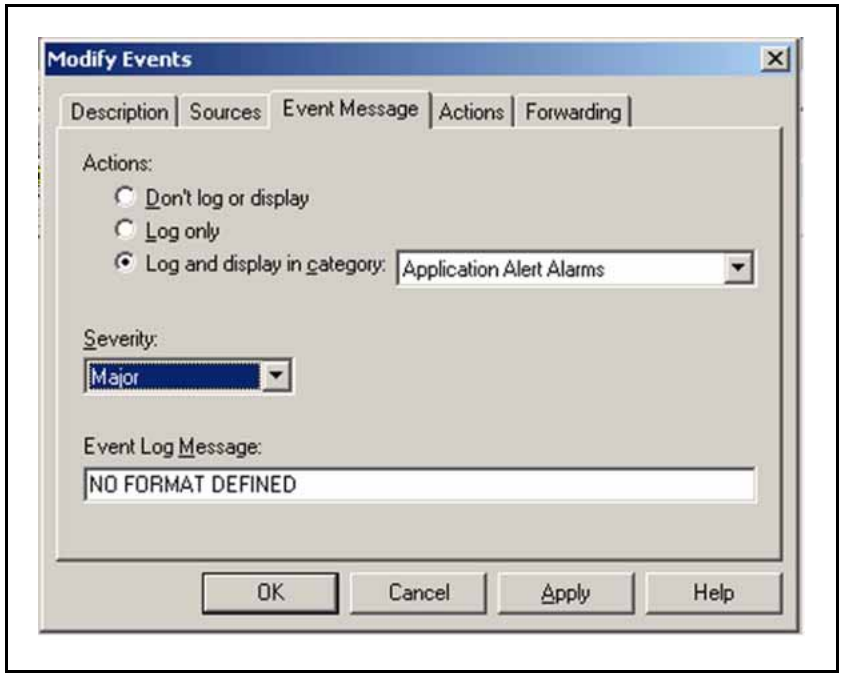

5 Click **Apply**.

The **Modify Events** window closes and the **Event Configuration** window reappears.

6 Repeat steps 3 and 4 for all the events you are configuring.

7 Click **Apply**.

8 In the **File** menu, select **Save**.

9 In the **File** menu, select**Close**.

--End--

Alarm logging and viewing

This section contains details about the Alarm logs and other tools.

Alarm Log

After events are configured, they appear in the Alarm Log.

Other tools

You can now configure other tools, such as:

- paging alerts
- e-mail alerts
- event correlation

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Appendix Common Trap Structure

Contents

This appendix contains information about the following topics:

“Overview” (page 109)

“Trap severities” (page 109)

“Variable bindings” (page 110)

Overview

A Common Trap structure ensures that traps from all Communication Server 1000 system devices, including those on Linux, use the same format. A new common trap MIB (**COMMON-TRAP-MIB.mib**) is described in detail in the following sections.

Trap severities

The traps have seven severities that each map to a specific trap code. See Figure 17 "SNMPv1 trap PDU fields" (page 71). A trap type defines the severities, for example, **commonMIBAlarmMajor** or **commonMIBAlarmMinor**. See “Common Trap MIB” (page 115). The seven severities are

- Critical
- Major
- Minor
- Warning
- Cleared
- Indeterminate
- Info

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 21 "Severity mapping table" (page 110) compares the severity mapping of the Common Trap structure to the severity mapping used by the Call Server, Signaling Server, and Voice Gateway Media Card in Communication Server 1000 Release 5.0 and earlier.

In Communication Server 1000 Release 7.0, all Communication Server 1000 devices use the Common Trap severity mapping.

Table 21
Severity mapping table

Severity (value) in Common Trap structure	Severity in SS and VGMC	Severity in CS
critical (1)	critical (1)	critical (3)
major (2)	major (2)	major (2)
minor (3)	minor (3)	minor (1)
warning (4)	warning (4)	warning (4)
info (5)	None	info (0)
indeterminate (6)	indeterminate (0)	None
cleared (7)	cleared (5)	cleared (5)

Variable bindings

The common trap MIB has a fixed number of variable bindings. Each trap type has the same number and types of variable bindings. For a description of the Common Trap variable bindings mapping, see Table 23 "Variable binding mapping table" (page 112).

- **commonMIBSeqNumber:**

  contains a unique sequence number for every trap that is sent out. Filtered traps are not assigned a sequence number.

- **commonMIBDateAndTime:**

  contains the date and time in a common format.

- **commonMIBSeverity:**

  represents the severity of the alarm.

- **commonMIBComponentID:**

  contains a string separated by colons that represents the unique system component that raises the trap. This value is generated dynamically by traps received from system elements. The value is unique within each system.

  The format for the string is: `System=systemname:Site=sitename :Component=componentName`

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Values for systemname and sitename are filled in at the consolidation point as configured through EM on the SNMP Configuration page.

The componentName is determined based on the original source of the trap. For mapping details for the system element and the component name, see Table 22 "commonMIBComponentID mapping" (page 111).

Table 22
commonMIBComponentID mapping

System elements	Component name
Call Server	CS
Signaling Server	SS
Voice Gateway Media Cards (includes MC32S)	VGMC
Media Gateway Controller	MGC
Media Gateway Extended Peripheral Equipment Controller	MGX
Common Processor Media Gateway	MGS
SIP NRS Linux	NRS
NRS Manager	NRSM
EM/BCC Linux	MGMT
Virtual Trunk on Linux	VTRK
Terminal Proxy Server on Linux	TPS
Shared Application on Linux	SSSHARED
Gatekeeper	GK
Sip Proxy Server on Linux	SPS
Network Connect Server on Linux	NCS
Connection Server	CSV
SIP Bridge	SIPBRG

- **commonMIBNotificationID:**

  intended to support clears from system elements that are capable of providing unique IDs for generated traps and corresponding clears. If the system does not provide a unique notification ID, this value is set to zero, indicating that clears are not supported by that system. The combination of commonMIBComponentID and commonMIBNotificationID is unique within a system.

- **commonMIBSourceIPAddress:**

  represents the IP address of the system element that generated the trap.

- **commonMIBErrCode:**

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

represents specific error codes generated by a system element.

- **commonMIBAlarmType:**

  represents a broad category as described in commonMIBAlarmData.

- **commonMIBProbableCause:**

  represents probable cause for the alarm, and qualifies the type of alarm that appears in the commonMIBAlarmType field.

- **commonMIBAlarmData:**

  a textual description of the trap. Text fields like Alarm Description, Operator Data, and Expert Data are consolidated into a single field . Operator Data is first, Alarm Description second, and Expert Data third, separated by semicolons. This field is truncated if the combined size becomes too large for a single variable binding.

Table 23 "Variable binding mapping table" (page 112) provides a comparison of the variable bindings found in traps in previous releases for the Call Server, Signaling Server, and Voice Gateway Media Card to the new Common Trap format variable bindings.

Table 23
Variable binding mapping table

Variable binding in Common Trap Structure	Variable binding in SS and VGMC	Variable binding in CS	Variable binding in Linux Trap
commonMIBSeqNumber	None	None	None
commonMIBDateAndTime	EventTime	AlarmTime	commonMIBDateAndTime
commonMIBSeverity	Severity	AlarmSeverity	commonMIBSeverity
commonMIBNotificationID	None	None	commonMIBNotificationID
commonMIBcomponentID	combination of ComponentName and Component OID	combination of ComponentName and Component OID	commonMIBcomponentID
commonMIBSourceIPAddress	IP address of element from trap header	IP address of element from trap header	commonMIBSourceIPAddress
commonMIBErrCode	NTP Index	ErrorCode	commonMIBErrCode
commonMIBAlarmType	AlarmType	Constant value unknown is inserted according to ITU specification	commonMIBAlarmType

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Table 23
Variable binding mapping table (cont'd.)

commonMIBProbableCause	ProbableCause	Constant value unknown is inserted for all the traps from CS	commonMIBProbableCause
commonMIBAlarmData	OperatorData (or Comment)	OperatorData Description text and ExpertData are combined and values are separated by a colon (:)	commonMIBAlarmData

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Appendix Common Trap MIB

The Common Trap MIB contains definitions of the sysObjectID values for all devices that appear in a MIB-II sysObjectID query. Download the latest version of the MIBs for Nortel products from www.nortel.com.

The Common Trap MIB OID structure for trap and variable bindings are described in the following section:

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

```
COMMON-TRAP-MIB
    --FORCE-INCLUDE <mib.h>
    --FORCE-INCLUDE <snmpdefs.h>
    --FORCE-INCLUDE <snmpstat.h>


DEFINITIONS ::= BEGIN

--  TITLE:  Common Trap MIB
--
--  Author: Madhukeshwar Hegde
--
--  This specification has been successfully compiled with the following
--  MIB compilers:
--    a) Wind River Systems  Emissary SNMP MIB Compiler, version 7.0
--
--  Note:
--  This document is maintained as a text file.

IMPORTS
        OBJECT-TYPE, MODULE-IDENTITY, enterprises     FROM SNMPv2-SMI
        DateAndTime                                   FROM SNMPv2-TC
        TRAP-TYPE                                     FROM RFC-1215
        DisplayString                                 FROM RFC1213-MIB;

commontrapmib   MODULE-IDENTITY
        LAST-UPDATED "1002230000Z"
        ORGANIZATION "Nortel Networks"
        CONTACT-INFO
                "Postal: Nortel Networks
                250 Sidney Street
                Belleville ON K8P 3Z3
                Tel    : +1 613 967 5000"
        DESCRIPTION
                "The common SNMP trap MIB for CS 1000 system."

      REVISION        "1002230000Z"
      DESCRIPTION
            "Changed definition of enterprises 562 from nt to nortel to
             correspond to corporate standards"
      REVISION      "0901160000Z"
      DESCRIPTION
            "Reference to ECM is changed to UCM"
      REVISION      "0811250000Z"
      DESCRIPTION
            "Updated MIB for R6.0 with Linux device OID entry."
      REVISION      "0610261630Z"
      DESCRIPTION
            "Initial version"

        ::= { management 50 }

-- LAST-UPDATED field is in UTC Time Format
--   YYMMDDHHMMZ
--   where: YY - last two digits of year       MM - month (01 through 12)
--          DD - day of month (01 through 31)  HH - hours (00 through 23)
--          MM - minutes (00 through 59)
--           Z - the character "Z" denotes Greenwich Mean Time (GMT).

-- For example, "0302191600Z" represents 4:00pm GMT on 19 February 2003.

nortel                      OBJECT IDENTIFIER ::= { enterprises 562 }
--  nortel. The name under which 562 is registered with IANA.

meridian                OBJECT IDENTIFIER ::= { nortel 3 }
--  Meridian. The value assigned for Meridian.

management              OBJECT IDENTIFIER ::= { meridian 10 }
--  management. The value assigned for management.
```


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

```
fm-info                 OBJECT IDENTIFIER ::= { management 10 }
--  fm-info. The value assigned for management information.

mgmt-traps              OBJECT IDENTIFIER ::= { fm-info 1 }
--  mgmt-traps. The value assigned for management traps.

mgmt-info               OBJECT IDENTIFIER ::= { fm-info 2 }
--  mgmt-info. The value assigned for management information.

--  Device definitions
--  defines OIDs associated with different devices

--  Call Server uses the meridian definition

--  sigserv     OBJECT IDENTIFIER       ::= { meridian 21 }
--  sigserv The value assigned for Signaling Server
--  removed from CS1000 Rls 6.0

itg         OBJECT IDENTIFIER ::= { meridian 11 }
--  itg. The value assigned for ITG.

iplmib      OBJECT IDENTIFIER ::= { itg 5 }
--  iplmib. The value assigned for VGMC cards

mgc         OBJECT IDENTIFIER ::= { meridian 7 }
-- mgc. The value assigned for Media Gateway Controller.

nrs         OBJECT IDENTIFIER ::= { meridian 12 }
-- nrs. The value assigned for NRS (on Linux).

ucm         OBJECT IDENTIFIER ::= { meridian 13 }
-- ucm. The value assigned for UCM management(on Linux).

linuxplatform OBJECT IDENTIFIER ::= { meridian 14 }
-- linuxplatform. The value assigned for a combination of applications running on a Linux
platform.

--  General definitions

AlarmSeverity           ::= INTEGER {
                            critical        (1),
                            major           (2),
                            minor           (3),
                            warning         (4),
                            info            (5),
                                    indeterminate   (6),
                            cleared         (7)
                            }

AlarmType               ::= INTEGER {
                                        communications          (1),
                                        qualityOfService        (2),
                                        processing              (3),
                                        equipment               (4),
                                        security                (5),
                                        operator                (6),
                                        debug                   (7),
                                        unknown                 (8)
                                        }
--  Fault management alarm types

commonMIBAlarmCritical  TRAP-TYPE
        ENTERPRISE      mgmt-traps
        VARIABLES       {
                commonMIBSeqNumber,
                commonMIBDateAndTime,
            commonMIBSeverity,
                commonMIBComponentID,
```


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

```
                commonMIBNotificationID,
                commonMIBSourceIPAddress,
                commonMIBErrCode,
                commonMIBAlarmType,
                commonMIBProbableCause,
                commonMIBAlarmData
        }
        DESCRIPTION
                "This trap is used to provide a real time indication
                of a critical alarm condition. The variables listed
                in VARIABLES clause are defined in `mgmt-info'
                group and are present in all critical alarms."
        ::= 1

commonMIBAlarmMajor     TRAP-TYPE
        ENTERPRISE      mgmt-traps
        VARIABLES       {
                commonMIBSeqNumber,
                commonMIBDateAndTime,
            commonMIBSeverity,
                commonMIBComponentID,
                commonMIBNotificationID,
                commonMIBSourceIPAddress,
                commonMIBErrCode,
                commonMIBAlarmType,
                commonMIBProbableCause,
                commonMIBAlarmData
        }
        DESCRIPTION
                "This trap is used to provide a real time indication
                of a Major alarm condition. The variables listed
                in VARIABLES clause are defined in `mgmt-info'
                group and are present in all major alarms."
        ::= 2

commonMIBAlarmMinor     TRAP-TYPE
        ENTERPRISE      mgmt-traps
        VARIABLES       {
                commonMIBSeqNumber,
                commonMIBDateAndTime,
            commonMIBSeverity,
                commonMIBComponentID,
                commonMIBNotificationID,
                commonMIBSourceIPAddress,
                commonMIBErrCode,
                commonMIBAlarmType,
                commonMIBProbableCause,
                commonMIBAlarmData
        }
        DESCRIPTION
                "This trap is used to provide a real time indication
                of a Minor alarm condition. The variables listed
                in VARIABLES clause are defined in `mgmt-info'
                group and are present in all minor alarms."
        ::= 3

commonMIBAlarmWarning   TRAP-TYPE
        ENTERPRISE      mgmt-traps
        VARIABLES       {
                commonMIBSeqNumber,
                commonMIBDateAndTime,
            commonMIBSeverity,
                commonMIBComponentID,
                commonMIBNotificationID,
                commonMIBSourceIPAddress,
                commonMIBErrCode,
                commonMIBAlarmType,
                commonMIBProbableCause,
                commonMIBAlarmData
```


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

```
        }
        DESCRIPTION
                "This trap is used to provide a real time indication
                of a Warning alarm condition. The variables listed
                in VARIABLES clause are defined in `mgmt-info'
                group and are present in all warning alarms."
        ::= 4

commonMIBAlarmInfo      TRAP-TYPE
        ENTERPRISE      mgmt-traps
        VARIABLES       {
                commonMIBSeqNumber,
                commonMIBDateAndTime,
            commonMIBSeverity,
                commonMIBComponentID,
                commonMIBNotificationID,
                commonMIBSourceIPAddress,
                commonMIBErrCode,
                commonMIBAlarmType,
                commonMIBProbableCause,
                commonMIBAlarmData
        }
        DESCRIPTION
                "This trap is used to provide a real time indication
                of an infomational alarm condition. The variables listed
                in VARIABLES clause are defined in `mgmt-info'
                group and are present in all info alarms."
        ::= 5

commonMIBAlarmIndeterminate     TRAP-TYPE
        ENTERPRISE      mgmt-traps
        VARIABLES       {
                commonMIBSeqNumber,
                commonMIBDateAndTime,
            commonMIBSeverity,
                commonMIBComponentID,
                commonMIBNotificationID,
                commonMIBSourceIPAddress,
                commonMIBErrCode,
                commonMIBAlarmType,
                commonMIBProbableCause,
                commonMIBAlarmData
        }
        DESCRIPTION
                "This trap is used to provide a real time indication
                of an indeterminate alarm condition. The variables listed
                in VARIABLES clause are defined in `mgmt-info'
                group and are present in all indeterminate alarms."
        ::= 6

commonMIBAlarmClear     TRAP-TYPE
        ENTERPRISE      mgmt-traps
        VARIABLES       {
                commonMIBSeqNumber,
                commonMIBDateAndTime,
            commonMIBSeverity,
                commonMIBComponentID,
                commonMIBNotificationID,
                commonMIBSourceIPAddress,
                commonMIBErrCode,
                commonMIBAlarmType,
                commonMIBProbableCause,
                commonMIBAlarmData
        }
        DESCRIPTION
                "This trap is used to provide a real time indication
                of a clear alarm condition. The variables listed
                in VARIABLES clause are defined in `mgmt-info'
                group and are present in all clear alarms."
```


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

```
        ::= 7

commonMIBSeqNumber      OBJECT-TYPE
                SYNTAX                  INTEGER (9999)
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "Sequence number of the alarm; starts at 1 and increments by 1;
                        must be unique for all alarms emited from commonMIB."
        ::= { mgmt-info 1 }

commonMIBDateAndTime OBJECT-TYPE
                SYNTAX                  DateAndTime
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "Time at which the alarm occurred."
        ::= { mgmt-info 2 }

commonMIBSeverity OBJECT-TYPE
                SYNTAX                  AlarmSeverity
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "The severity of the alarm which should indicate the
                        priority of the event"
        ::= { mgmt-info 3 }

commonMIBComponentID    OBJECT-TYPE
                SYNTAX                  DisplayString (SIZE(264))
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "This variable binding contains colon (:) separated string uniquely
                        representing the system component that raised this trap. This
varbind
                        is in '<systemName>:<siteName>:<componentName>'format. This     is
                        generated dynamically from traps received from system elements
                        and for each element it would be unique within system"
        ::= { mgmt-info 4 }

commonMIBNotificationID         OBJECT-TYPE
                SYNTAX                  INTEGER
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "This variable binding is intended to support clears from system
                        elements that are capable of providing unique Id for generated
                        traps and their corresponding clears. If system element does not
                        provide unique notification id, this value would be set to 0
                        indicating that system do not support clears. "
        ::= { mgmt-info 5 }

commonMIBSourceIPAddress        OBJECT-TYPE
                SYNTAX                  DisplayString (SIZE(7..23)) -- NetworkAddress
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "The IP address of the element that originated the trap."
        ::= { mgmt-info 6 }

commonMIBErrCode        OBJECT-TYPE
                SYNTAX                  DisplayString(SIZE(8))
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "Represents specific error code generated by any system element."
        ::= { mgmt-info 7}
```


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

```
        ::= { mgmt-info 7}

commonMIBAlarmType      OBJECT-TYPE
                SYNTAX                  AlarmType
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "The alarm type field as defined by OSI which is used
                        to indicate a broad category of what is wrong. The
                        first 6 values are OSI-defined; refer to CCITT X.733/ISO
                        10164-4 (for the first 5) and CCITT X.736/ISO 10164-4
                        (for the last) for a more complete description. The
                        value 'operator' is used when an alarm is issued due
                        to an operator command. The values 'debug' and 'unknown'
                        are for compatibility with older switches and are used
                        for debugging alarms and for those which do not fit
                        any of the above, respectively."
        ::= { mgmt-info 8}

commonMIBProbableCause  OBJECT-TYPE
                SYNTAX                  INTEGER {
-- Start of OSI-defined values
-- (see X.733/ ISO 10165-3)
                        lossOfSignal(0),
                        lossOfFrame(1),
                        framingError(2),
                        localTransmissionError(3),
                        remoteTransmissionError(4),
                        callEstablishmentError(5),
                        degradedSignal(6),
                        commSubsystemFailure(7),
                        commProtocolError(8),
                        lanError(9),
                        dteDceInterfaceError(10),
                        responseTimeExcessive(20),
                        queueSizeExceeded(21),
                        bandwidthReduced(22),
                        retransmissionRateReduced(23),
                        thresholdCrossed(24),
                        performanceDegraded(25),
                        congestion(26),
                        atOrNearCapacity(27),
                        storageCapacityProblem(40),
                        versionMismatch(41),
                        corruptData(42),
                        cpuCyclesLimitExceeded(43),
                        softwareError(44),
                        softwareProgramError(45),
                        softwareProgramTermination(46),
                        fileError(47),
                        outOfMemory(48),
                        underlyingResourceUnavail(49),
                        applicationSubsystemFailure(50),
                        configurationError(51),
                        powerProblem(60),
                        timingProblem(61),
                        processorProblem(62),
                        datasetModemError(63),
                        multiplexorProblem(64),
                        receiverFailure(65),
                        transmitterFailure(66),
                        outputDeviceError(67),
                        inputDeviceError(68),
                        ioDeviceError(69),
                        equipmentFailure(70),
                        adapterError(71),
-- OSI-defined values continued (see X.736)
                        duplicateInfo(80),
                        infoMissing(81),
```


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

```
                        infoModification(82),
                        infoOutOfSequence(83),
                        unexpectedInfo(84),
                        denialOfService(90),
                        outOfService(91),
                        proceduralError(92),
                        otherOperational(93),
                        cableTamper(100),
                        intrusionDetection(101),
                        otherPhysical(102),
                        authenticationFailure(110),
                        breachOfConfidence(111),
                        nonRepudiationFailure(112),
                        unauthorizedMAX-ACCESS(113),
                        otherSecurityService(114),
                        delayedInfo(120),
                        keyExpired(121),
                        outOfHoursActivity(122),
-- Start of non-OSI defined values
                        operationalCondition(200),
                        debugging(201),
                        unknown(202),
                        inactiveVirtualCircuit(203),
                        networkServerIntervention(204)
                }
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "The probable cause for the alarm which usually
                        qualifies the Alarm Type field. Most values are
                        OSI-defined; refer to CCITT X.733 and X.736
                        (ISO 10164-4 and 10164-7) for a more complete
                        description."
        ::= { mgmt-info 9 }

commonMIBAlarmData      OBJECT-TYPE
                SYNTAX                  DisplayString ( SIZE (0..750) )
                MAX-ACCESS              read-only
                STATUS                  current
                DESCRIPTION
                        "This variable binding represents textual description
                        of trap."
        ::= { mgmt-info 10}

END
```


Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

List of terms

BUG

A system message category associated with the Software Error Monitor, which is a program that continuously monitors call processing. When invalid information is detected, a BUG message is printed.

EDT

Event Default Table. Table of default event entries and associated severities.

EPT

Event Preference Table. Table of customer's event entries with associated severities.

ERR

Error (Hardware). A system message category associated with the Software Error Monitor, which is a program that continuously monitors call processing. When information is detected that is not in the correct format or invalid, an ERR message is printed.

ITG

Integrated IP Telephony Gateway. A system message category associated with the Integrated IP Telephony Gateway component, which generates a trap message from the Voice Media Gateway Card and Signaling Server. The trap message incorporates the severity category of the message in the first digit of the four-digit number.

ITS

Integrated IP Telephony Server. A system message category associated with the Integrated IP Telephony Server component which generates a trap message from the Internet Telephone and reports it through the Signaling Server. ITS trap messages incorporate the severity category of the message in the first-digit of the four digit number.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

QoS

Quality of Service. Uses Proactive Voice Quality (PVQ) monitoring to assist crafts persons to diagnose, isolate, and correct networking issues that cause deterioration of voice quality. QoS can also refer to a system message category for traps issued for Quality of Service events.

SELSIZE

System Event List Size. The number of events in System Event Log.

SEL

System Event List. A list of system events that are viewed in a log file.

SUPPRESS

Suppress count. The number of times the same event is processed before it is suppressed.

TIMER

Global window timer length.

WEB

Web Server. A system message category associated with the Software Error Monitor, which generates a trap message between the Communication Server 1000 Web server, Remote Procedure Call (RPC) Server, and Call Server.

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Index

? 44

A

Abstract Syntax Notation One 78
ACD 21
agent 18
Agent address 71
alarm 17
alarm and log histories 73
Alarm Management feature 42
alarm suppression thresholds 27
alarms 75
architecture 25, 28
ASN.1 78
automatic network routing table entries 33

B

BUG 28

C

Call Server 70, 95
Call Server MIBs 85
CallPilot 21
CHG TIMER 44
child node 80
community name 70
community string 18
component information 88
configure Alarm Management 39
configure the SNMP Agent 40
Contact Center 21

D

dedicated LAN 34
default severities 27
diagnostic utility 41
digital telephones 98
discarded packets 87
DIT 100
Downloading the MIBs from the Nortel Networks Web site 99

E

EDT 27, 42
EDT configuration commands 44
EDT Override Mode 27
embedded SNMP agents 21
Enterprise 71
Enterprise NMS 100
Enterprise Specific 18
Entity General Group 88
Entity group 85, 88
Entity Physical Group 88
entLastChangeTime 88
entPhysicalAlias 88
entPhysicalAssetID 88
entPhysicalClass 88
entPhysicalContainedIn 88
entPhysicalDescr 88
entPhysicalFirmwareRev 88
entPhysicalHardwareRev 88
entPhysicalIsFRU 88
entPhysicalMfgName 88
entPhysicalModelName 88
entPhysicalName 88
entPhysicalParentRelPos 88
entPhysicalSerialNum 88
entPhysicalSoftwareRev 88
entPhysicalVendorType 88
EPT 27, 42–43
EPT configuration commands 44
ERR 28

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

ERR? 44
ERR?? 44
ERR??? 44
ERR???? 44
escalation threshold 44
escalation thresholds 27
event 17
Event Collector 25–28, 42
Event Default Table 27, 42
Event Preference Table 27, 43
Event Preferences Table 21
Event Server 25–26, 28, 42
events 21

F

Fault 17
FTP host 73

G

General 85
Generic trap type 71
get 19
get-next 19
gets 77
global window timer length 44

H

header 70
Host Resources group 97–98
HP OpenView 100

I

IANA 78
ICMP group 85–87, 95–98
ICMP protocol errors 87
Interface group 85–87, 94, 96, 98
Internet Assigned Numbers Authority 78
interzone parameters 95
intrazone 95
inventory 98
IP group 85–87, 94, 96–98
IP stack 87
IP Trunk cards 70
ITG 21
ITS 21

L

LAN configuration 34
LD 117 40–41, 98
LD 117 commands 40
LD 2, Traffic Report 16 95
Linux NRS 97
log histories 73
LogFilePut 73

M

Management Information Base 18
management system 19
message header 70
Message header 70
mgmt(2) node 79
MIB 18, 77
MIB Module 78
MIB Tree 78
MIB-II Group variables 77
Midnight Inventory 98

N

Navigation Site Name 80
Network Management System 78
NMS 18, 78, 100
NT node 95
NWS 28

O

Object ID 78, 95
object ID sequence 95
object ID tree structure 95
OID 78
Override Mode 27

P

PDU 70
PDU type 18
Physical 85
physical inventory 88
private(4) node 79
Protocol Data Unit 70

Q

QOS 21
QOS MIB 99
QOS MIB group 95
QOS-MIB.mib 95
QOSTRAFFIC-MIB 94

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

R

relationships 88
remove a trap destination 68
report 18
Report Log 28
resident system reports 73
routing algorithm 87

S

SEL 42
set 19
set commands 77
SET OPEN_ALARM 40
set target IP addresses 40
Signaling Server 70, 94
SNMP agent 28
SNMP Agent 30
SNMP entity 87
SNMP Ethernet configuration LAN 34
SNMP group 85–87, 95–97
SNMP Profile Manager 23
SNMP profiles 22
SNMP Profiles
Alarm 23
MIB Access 22
System Info 23
SNMP query commands 77
SNMP trap destination address 68
SNMP TRAP-TYPE Protocol Data Unit (PDU) 18
SNMPv1 70
SNMPv1 message format 70
Specific trap code 71
sysContact 80, 86, 94, 96, 98
sysDescr 80, 86, 94, 96, 98
SysDescr 41
sysLocation 80, 87, 98
sysName 80, 87, 96, 98
sysObjectID 80, 86, 94, 96, 98
SysObjectId 41
System Contact 86
System Event List 27, 42
System group 85–86, 94, 96, 98
System History File 42
System Location 87
system message 18
system messages 21
System Name 87
system(1) group 80
sysUpTime 80
SysUpTime 41

T

TCP group 85–87, 95–98
TCP port numbers 87
TCP stack 87
TCP/IP 19
TEST ALARM command 41
Test Alarm utility 42
third-party NMSs 100
Third-party NMSs 100
third-party SNMP Management System 21
Time stamp 71
traffic parameters 95
trap 18
trap MIB 70
trap type 18
TRAP-V1 18
traps 40
TTY 42

U

UCM 97
UDP group 85–87, 95–98
UDP port numbers 87
UDP stack 87
universal suppression threshold value 44
unsupported SNMP version 87

V

&var0_43001564MGC 96
Variable binding 84
Variable bindings 71
vendor type 88
verify configuration 41
Verify SNMP configuration 41
version number 70
view the Signaling Server error log file 73
Viewing system error messages 73
Voice Gateway Media Card MIBs 95
Voice Gateway Media Cards 70

W

WAN configuration 34
wildcard character 44
Wildcards 44
window timer length 44

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

X

XMI 21

Z

Zonetrafficrpt.mib 95, 99

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

Nortel Communication Server 1000

Communication Server 1000 Fault Management — SNMP

Release: 7.0
Publication: NN43001-719
Document revision: 04.01
Document release date: 4 June 2010

Copyright © 2007-2010 Nortel Networks. All Rights Reserved.

While the information in this document is believed to be accurate and reliable, except as otherwise expressly agreed to in writing NORTEL PROVIDES THIS DOCUMENT "AS IS" WITHOUT WARRANTY OR CONDITION OF ANY KIND, EITHER EXPRESS OR IMPLIED. The information and/or products described in this document are subject to change without notice.

Nortel, Nortel Networks, the Nortel logo, and the Globemark are trademarks of Nortel Networks.

All other trademarks are the property of their respective owners.

To provide feedback or to report a problem in this document, go to www.nortel.com/documentfeedback.

www.nortel.com

NORTEL