



Using Avaya 9608/9608G/9611G IP Deskphones SIP

© 2014 Avaya Inc.

All Rights Reserved.

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Note

Using a cell, mobile, or GSM phone, or a two-way radio in close proximity to an Avaya IP telephone might cause interference.

Documentation disclaimer

"Documentation" means information published by Avaya in varying mediums which may include product information, operating instructions and performance specifications that Avaya may generally make available to users of its products and Hosted Services. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of documentation unless such modifications, additions, or deletions were performed by Avaya. End User agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on Avaya hardware and software. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language, as well as information regarding support for this product while under warranty is available to Avaya customers and other parties through the Avaya Support website: <http://support.avaya.com> or such successor site as designated by Avaya. Please note that if you acquired the product(s) from an authorized Avaya Channel Partner outside of the United States and Canada, the warranty is provided to you by said Avaya Channel Partner and not by Avaya.

Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, [HTTP://SUPPORT.AVAYA.COM/LICENSEINFO](http://support.avaya.com/licenseinfo) OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM AVAYA INC., ANY AVAYA AFFILIATE, OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AVAYA CHANNEL PARTNER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA CHANNEL PARTNER; AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE ("AVAYA").

Avaya grants you a license within the scope of the license types described below, with the exception of Heritage Nortel Software, for which the scope of the license is detailed below. Where the order documentation does not expressly identify a license type, the applicable license will be a Designated System License. The applicable number of licenses and units of capacity for which the license is granted will be one (1), unless a different number of licenses or units of capacity is specified in the documentation or other materials available to you. "Software" means Avaya's computer programs in object code, provided by Avaya or an Avaya Channel Partner, whether as stand-alone products, pre-installed, or remotely accessed on hardware products, and any upgrades, updates, bug fixes, or modified versions thereto. "Designated Processor" means a single stand-alone computing device. "Server" means a Designated Processor that hosts a software application to be accessed by multiple users. "Instance" means a single copy of the Software executing at a particular time: (i) on one physical machine; or (ii) on one deployed software virtual machine ("VM") or similar deployment.

License types

Designated System(s) License (DS). End User may install and use each copy or an Instance of the Software only on a number of Designated Processors up to the number indicated in the order. Avaya may require the Designated Processor(s) to be identified in the order by type, serial number, feature key, Instance, location or other specific designation, or to be provided by End User to Avaya through electronic means established by Avaya specifically for this purpose.

Shrinkwrap License (SR). You may install and use the Software in accordance with the terms and conditions of the applicable license agreements, such as "shrinkwrap" or "clickthrough" license accompanying or applicable to the Software ("Shrinkwrap License").

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, Hosted Service, or hardware provided by Avaya. All content on this site, the documentation, Hosted Service, and the Product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, and or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Third Party Components

"Third Party Components" mean certain software programs or portions thereof included in the Software or Hosted Service may contain software (including open source software) distributed under third party agreements ("Third Party Components"), which contain terms regarding the rights to use certain portions of the Software ("Third Party Terms"). As required, information regarding distributed Linux OS source code (for those Products that have distributed Linux OS source code) and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply is available in the Documentation or on Avaya's website at: <http://support.avaya.com/Copyright> or such successor site as designated by Avaya. You agree to the Third Party Terms for any such Third Party Components

T9 Text Input and other products are covered by one or more of the following patents: U.S. Pat. Nos. 5,187,480, 5,818,437, 5,945,928, 5,953,541, 6,011,554, 6,286,064, 6,307,548, 6,307,549, and 6,636,162, 6,646,573, 6,970,599; Australia Pat. Nos. 727539, 746674, 747901; Austria Pat. Nos. AT225534, AT221222; Brazil P.I. No. 9609807-4; Canada Pat. Nos. 1,331,057, 2,227,904, 2,278,549, 2,302,595; Japan Pat. Nos. 3532780, 3492981; United Kingdom Pat. No. 2238414B; Hong Kong Standard Pat. No. HK1010924; Republic of Singapore Pat. Nos. 51383, 66959, 71979; European Pat. Nos. 1 010 057 (98903671.0), 1 018 069 (98950708.2); Republic of Korea Pat. Nos. KR201211B1, KR226206B1, 402252; People's Republic of China Pat. No. ZL96196739.0; Mexico Pat. Nos. 208141, 216023, 218409; Russian Federation Pat. Nos. 2206118, 2214620, 2221268; additional patent applications are pending

Preventing Toll Fraud

"Toll Fraud" is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If you suspect that you are being victimized by Toll Fraud and you need technical assistance or support, call Technical Service Center Toll Fraud Intervention Hotline at +1-800-643-2353 for the United States and Canada. For additional support telephone numbers, see the Avaya Support website: <http://support.avaya.com> or such successor site as designated by Avaya. Suspected security vulnerabilities with Avaya products should be reported to Avaya by sending mail to: securityalerts@avaya.com.

Trademarks

All non-Avaya trademarks are the property of their respective owners. Linux[®] is the registered trademark of Linus Torvalds in the U.S. and other countries.

Downloading Documentation

For the most current versions of Documentation, see the Avaya Support website: <http://support.avaya.com>, or such successor site as designated by Avaya.

Contact Avaya Support

See the Avaya Support website: <http://support.avaya.com> for Product or Hosted Service notices and articles, or to report a problem with your Avaya Product or Hosted Service. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: <http://support.avaya.com> (or such successor site as designated by Avaya), scroll to the bottom of the page, and select Contact Avaya Support.

Warning

The handset receiver contains magnetic devices that can attract small metallic objects. Care should be taken to avoid personal injury.

Power over Ethernet (PoE) warning

This equipment must be connected to PoE networks without routing to the outside plant.

VCCI-Class B statement:

This is a Class B product based on the standard of the VCCI Council. If this is used near a radio or television receiver in a domestic environment, it may cause radio interference. Install and use the equipment according to the instruction manual.

Contents

Chapter 1: Introduction to 9608/9608G and 9611G SIP deskphones	8
Physical layout.....	9
About connection jacks.....	11
Navigation tips.....	12
Icons on the deskphone.....	12
Call history icons for 9608/9608G deskphones.....	15
Call history icons for 9611G Deskphones.....	15
Presence icons for 9608/9608G.....	16
Presence icons for 9611G.....	16
Administrative messages	17
Deskphone stand.....	17
Network information.....	17
Chapter 2: Avaya Menu	19
Options & Settings.....	19
Displaying the Phone screen on dialing.....	20
Displaying the Phone screen on receiving a call.....	21
Displaying call timers.....	21
Setting redial options.....	21
Configuring visual alerts.....	22
Setting the audio path.....	22
Setting dialing options.....	22
Toggling caller name and number.....	23
Setting up speed dialing.....	23
Setting up favorites.....	24
Personalizing labels.....	24
Adjusting the brightness or contrast of the display.....	25
Setting the Return to Home Screen option.....	25
Setting the text size.....	26
Setting a ring tone for incoming forwarded calls.....	26
Setting a ring tone for your deskphone.....	27
Setting a ring tone for Team Button.....	27
Setting an alert for a call pickup group.....	27
Setting a ring tone for a call pickup group.....	28
Changing the background logo.....	28
Turning button click sounds on and off.....	28
Turning error tones on or off.....	29
Setting key repeat delay.....	29
Activating mute alerting.....	30
Enabling wireless headset.....	30
Setting the phone screen width.....	30

Changing the display language.....	31
Setting the time format.....	31
Setting headset profile.....	31
Turning automatic gain control on or off.....	32
Configuring Hearing Aid Compatibility.....	32
Integrating other applications with your phone.....	32
Browser.....	34
Using the WML browser.....	34
Chapter 3: Answering a call.....	36
Ignoring an incoming call.....	36
Putting a call on hold.....	37
Muting a call.....	37
Configuring mute alert.....	38
Switching to another deskphone during an active call.....	38
Making an attended transfer.....	38
Making an unattended transfer.....	39
Chapter 4: Making a call.....	41
Making an emergency call.....	41
Redialing a number.....	42
Speed dialing a person.....	42
Autodialing a pre-assigned number.....	42
Making a call using edit dialing.....	43
Calling a person from the contacts list.....	43
Making a call using URI dialing.....	43
Calling a person from the call history.....	44
Dialing an E.164 number.....	44
Chapter 5: Paging.....	45
Initiating a group page.....	45
Chapter 6: About forwarding calls.....	46
Activating Send All Calls.....	46
Activating call forwarding.....	47
Disabling call forwarding.....	47
Enabling call forwarding when your line is busy or you do not answer.....	47
Setting rules for enhanced call forwarding.....	48
Editing a rule.....	48
Turning off a rule.....	49
Chapter 7: Using the conference feature.....	50
Setting up a conference call.....	50
Adding a person on hold to a conference call.....	50
Putting a conference call on hold.....	51
Dropping the last participant from a conference call.....	51
Viewing the details for a conference.....	51

Chapter 8: Using bridged call appearances.....	53
Answering a call on a bridged line.....	53
Joining a call on a bridged line.....	53
Making an outgoing call on a bridged line.....	54
Excluding others from bridging on to your call.....	54
Independent alerting for each bridged call appearance.....	54
Chapter 9: Using the contacts feature.....	56
Adding a new contact.....	56
Editing a contact.....	57
Searching for a contact.....	58
Extended searching.....	58
Viewing the details for a contact.....	59
Assigning specific ring tone to a contact.....	59
Deleting a contact.....	60
Accessing Exchange contacts.....	60
Chapter 10: Call History.....	61
Viewing the call history.....	61
Viewing call history details.....	62
Adding an entry from the call history to your contacts list.....	62
Removing an entry from call history.....	62
Clearing all call history entries.....	63
Turning off call history.....	63
Chapter 11: About Team Button.....	64
Viewing the status of monitored stations.....	65
Answering an active call on a monitored extension.....	66
Speed dialing to a monitored extension.....	66
Transferring a call to a monitored deskphone.....	66
Assigning ring tone to a monitored station.....	67
Chapter 12: Receiving your messages.....	68
Logging into your voice mail.....	68
Chapter 13: About Features	69
Accessing the Features screen	69
Feature Table.....	70
Monitoring other extensions at a glance.....	71
Assigning labels to auto-dial numbers.....	71
Setting up automatic call back.....	72
Making an auto intercom call.....	72
Blocking your extension from displaying during calls.....	73
Displaying your extension on outgoing calls.....	73
Parking a call.....	74
Unparking a call.....	74
Setting up enhanced call pickup alerting	74

Picking up a call to another call pickup group.....	75
Picking up a call to another extension.....	75
Answering a call for a call pickup group member.....	76
Calling someone in your intercom group.....	76
Tracing a malicious call.....	76
Recording a call.....	77
Making a priority call.....	77
Interrupting a call with a whisper page.....	78
Activating the LNCC feature.....	78
Deactivating the LNCC feature.....	79
Visual alert for an encrypted call.....	79
Activating EC500 for simultaneous ringing on multiple phones.....	79
Extending a call to your cell phone (EC500).....	80
Chapter 14: Presence.....	81
Viewing contact presence status.....	81
Changing the presence status.....	82
Enabling SAC when DND is active.....	82
Enabling Away Timer.....	83
Chapter 15: About Hotline.....	84
Chapter 16: Using the Calendar.....	85
Calendar appointment reminders.....	85
Reviewing your appointments.....	85
Chapter 17: Limited access during failover.....	87
Chapter 18: Locking and logging in to and logging out of your deskphone.....	88
Logging in to your deskphone.....	88
Locking and unlocking your telephone.....	89
Logging out of your deskphone.....	89

Chapter 1: Introduction to 9608/9608G and 9611G SIP deskphones

Your deskphone provides many features that include:

- Viewing and managing your calls, call logs, and contacts list
- Customizing your deskphone
- Accessing your voice mail
- Using integrated WML browser


You can also attach up to three button modules to your deskphone to expand the available number of call appearances and features. Multiple button modules must all be the same type and same model.

The letter G in a deskphone model name indicates the presence of a built-in Gigabit Ethernet adapter that increases the transmission speed of data.

The 9611G deskphone has a color display, while the 9608 and 9608G models have a black and white display. The 9611G deskphone has a smaller display area than the 9608G deskphone. Only the 9608G deskphone has a LAN Ethernet LED on the back panel of the phone. Unless specifically stated in this guide, the two models are essentially the same in terms of features and functionality.

Your administrator might not have configured all functions and features described in this user guide.


Physical layout

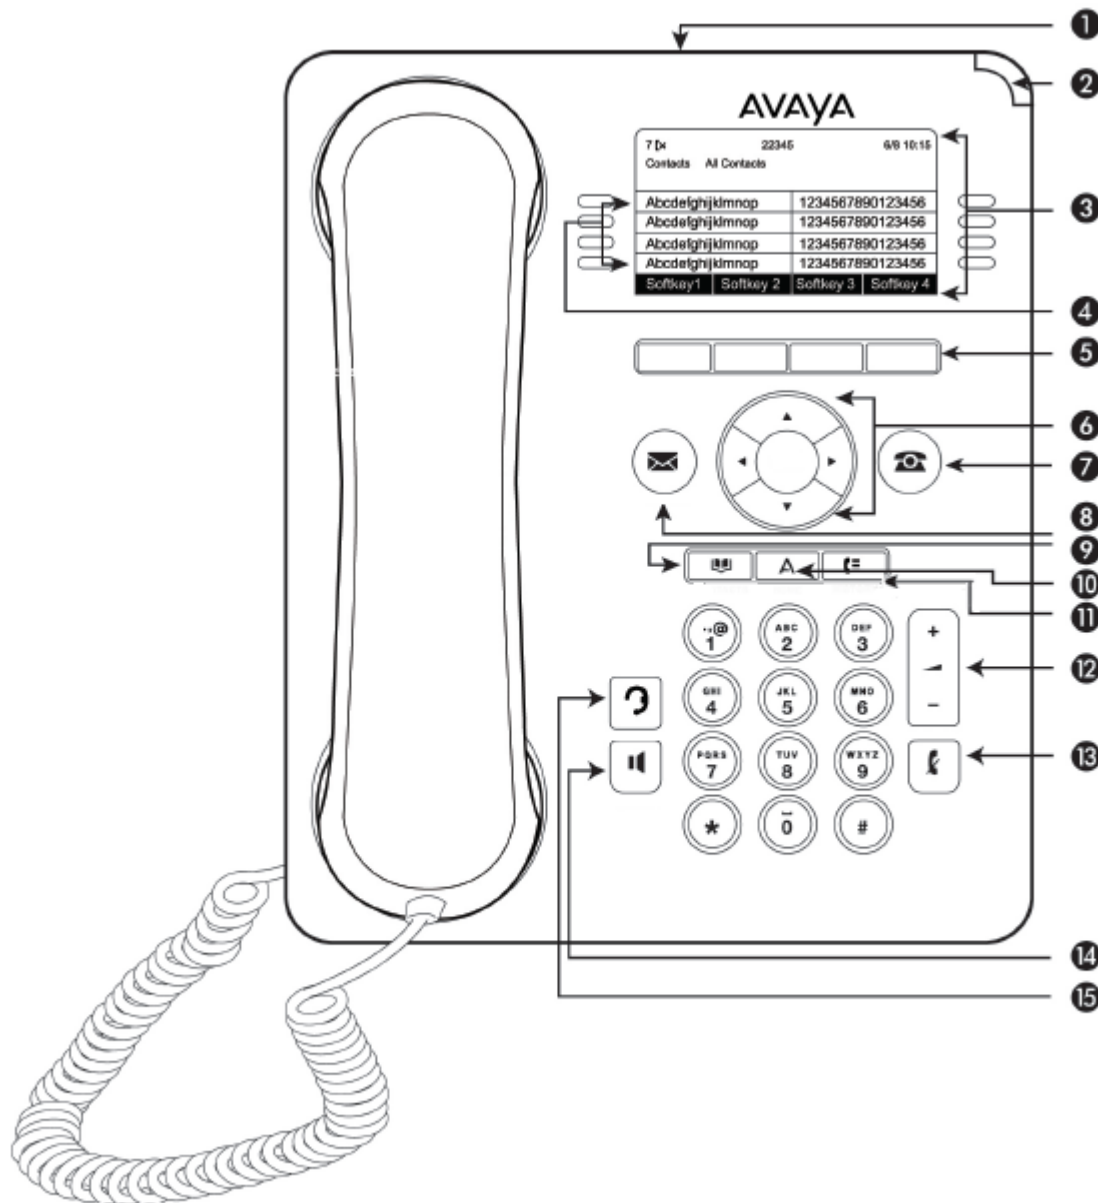









*** Note:**

Your deskphone might have labeled buttons.


The following table provides descriptions of the deskphone buttons and features.

Callout Number	Name	Icon if applicable	Description
1	USB port	N/A	While the 9608 and 9608G models do not have a USB port, the USB port in the 9611G is disabled and will be activated in a future software release.
2	Message waiting indicator	N/A	An illuminated red light in the upper-right corner of your deskphone indicates that you have a voice mail. If you enabled Visual Alerting on your phone, this light flashes when you receive an incoming call. In addition to the message waiting indicator, the deskphone lights the Message button when you have voice mail.
3	Phone display	N/A	The first line shows status information such as the time and date, primary extension, error indications, and missed calls. The second line, called the Status Line, provides information, such as when you can use the right or left navigation arrows to view other screens or menus. The Status Line also provides messages related to the current application or the actions that you must perform on a screen. Call appearances appear below the Status Line. The number of call appearances available to make or receive calls depend on how your administrator administers the system.
4	Features and call appearance lines	N/A	The line buttons with integrated LEDs show which lines are in use and correspond to the lines on the display. Press the line button to select that line. For an incoming call, the green LED blinks. While the deskphone is off-hook, both the red and the green LED glow. Lines also indicate if the system or system number has enabled or disabled a feature in the Feature or System Numbers view. The green LED glows to indicate that a feature is enabled. When you turn off the feature, the LED turns off.
5	Softkeys	N/A	Use the softkeys to act on the highlighted line on the screen. The softkey labels show you the action that each key produces. The labels and the actions vary depending on the screen that the phone displays.
6	OK and navigation arrows	N/A	The OK button performs the action of the highlighted option of a menu. Use the right and left navigation arrows to navigate from one screen to another, or to move the cursor during text input. Use the up and down navigation arrows to move from one line to another. However, if you are using the half-width mode, the up and down navigation arrows move one screen at a time, instead of one line at a time.
7	Phone		The Phone button displays the Phone screen when you press the button. During a call, you can gain access to the following options from the Phone screen: <ul style="list-style-type: none"> • Hold

Callout Number	Name	Icon if applicable	Description
			<ul style="list-style-type: none"> • Conference • Transfer • Drop call
8	Message		When you press Message , you are connected directly to your voice mail system. The deskphone lights this button when you have voice mail messages waiting.
9	Contacts		When you press Contacts , the Phone screen displays the entries in your contact list.
10	Home		When you press Home , you gain access to the Avaya Menu to configure options and settings, access the browser and or any applications available to you, log out, or view network information.
11	History		When you press History , the Phone screen displays the history of your outgoing, incoming, and missed calls. The icon on the History the deskphone lights the button when you have missed calls. The top line shows the Missed Call icon and the number of calls that you have missed.
12	Volume		If you press + or - on the Volume button on an active call, the phone increases or decreases the volume of your handset, headset, or speaker accordingly. When you are not on an active call, pressing these buttons adjusts the ringer volume.
13	Mute		Press the Mute button to mute a call in progress. To take a call off mute, press Mute again.
14	Speaker		Press the Speaker button to use the speakerphone. To take a call off speakerphone, lift the handset or press the Headset button.
15	Headset		Press the Headset button to use the headset if connected.

About connection jacks

The following image illustrates the connection jacks that are present on the back panel of Avaya one-X Deskphone 9608/9608G and 9611G models. The image schematically describes which device to connect in which jack.

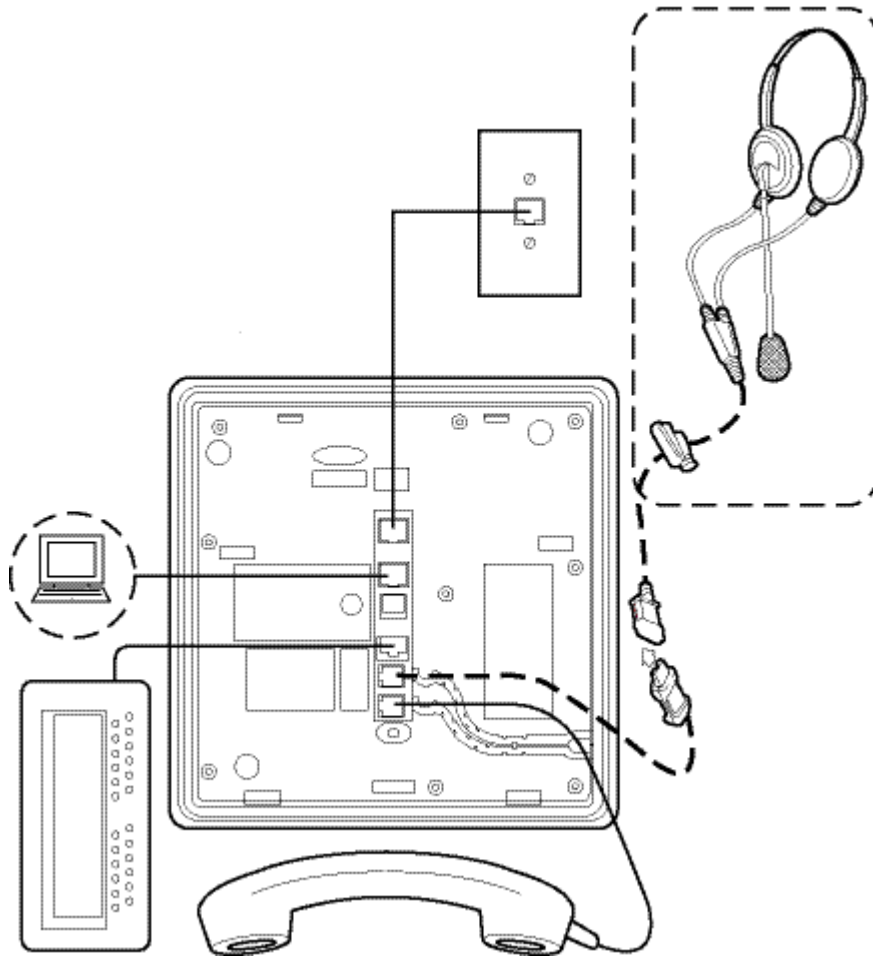

Navigation tips





















The deskphone displays navigation icons (▶) on the phone display to indicate that you can scroll to more options or information. Use the right and left navigation buttons to move between the Phone screen and Features list, or the Features list and the System Numbers list.







Icons on the deskphone

The following table lists the icons used in the 9608 and 9608G IP deskphones.

Icon	Description
	Missed call on your phone.
	Incoming call; indicates you have answered this call.
	Outgoing call; indicates you have made this call.
	EC500 is activated.
	Incoming call is alerting.
	Call is active.
	Call is on hold.
	Conference is active.
	Conference is on hold.
	Use the Right or Left navigation arrow for additional pages/screens/options.
	Scroll left for other options.
	Scroll right for other options.
	Scroll up or down when there is more information than can display in the application area.
	The call in progress is muted.
	Pressing - on the Volume button continuously causes the ringer volume to turn off. To reinstate volume, press + on the Volume button.
	Icon indicating the deskphone is not connected to its network and is operating in "failover" mode. Some features might not be available or work correctly. See Limited access during failover on page 87 for information. If this icon displays in the appearance line, the icon indicates that the phone has encountered a failure and has preserved the media session until the near user hangs up.
	You have designated this contact or feature as a "favorite." See Setting up favorites on page 24 for more information.
	Indicates that the Send All Calls feature is on.
	Indicates that the call is using a wideband codec for good quality voice call.
	Indicates a low network performance or presence of local network issues that might result in lower call quality.
	Indicates that the user enabled the LNCC feature. The LNCC feature changes the Multiple Call Appearance deskphone to a Single Call Appearance deskphone.




The following table lists the icons used in the 9611G IP deskphone.

Icon	Description
	Microphone is muted.
	Missed call on your phone.
	Incoming call; indicates you have answered this call.
	Outgoing call; indicates you have made this call.
	The deskphone has activated the EC500 feature.
	Incoming call is alerting.
	Call is active.
	Call is on hold.
	Conference is active.
	Conference is on hold.
	Use the Right or Left navigation arrow to see more pages/screens/options.
	Scroll left for other options.
	Scroll right for other options.
	Scroll up or down when the application area has more information than it can display.
	Pressing - on the Volume button continuously causes the volume to turn off. To reinstate volume, press + on the Volume button.
	Team icon indicating this team member is available.
	Team icon indicating this team member is busy on a call and unavailable.
	Team icon indicating this team member is not on a call, but is forwarding incoming calls.
	Team icon indicating this team member is busy on a call and is forwarding incoming calls.
	Icon indicating the deskphone is not connected to the network and is operating in "failover" mode. Some features might not be available or work correctly. See Limited access during failover on page 87 for information. If the appearance line displays the icon, the icon indicates that the phone has encountered a failure and has preserved the media session until the near user hangs up.




Icon	Description
	You have designated this contact or feature as a "favorite." See Setting up favorites on page 24 for more information.
	The icon shown applies to the deskphones with color display. The EC500 feature is on.
	The icon shown applies to the deskphones with color display. The Send All Calls feature is on.
	Indicates that the call is using a wideband codec for good voice quality.
	Indicates a low network performance or presence of local network issues that might result in lower call quality.
	Indicates that the user enabled the LNCC feature. User can control the number of concurrent incoming calls by using the Limit Number of Concurrent Calls (LNCC) feature that changes the Multiple Call Appearance deskphone to a Single Call Appearance deskphone. If the user receives an incoming call when the LNCC feature is active and the user is already on a call, the caller gets the busy tone.

Call history icons for 9608/9608G deskphones








The following icons indicate the types of calls.

Icon	Name	Description
	Missed call	Indicates that you did not answer the call or had forwarded the call to your voice mail.
	Answered call	Indicates that you have answered the call.
	Outgoing call	Indicates that you have made the call.








Call history icons for 9611G Deskphones

Icon	Description
	Missed call; indicates you did not answer this call or had forwarded the call to voice mail.
	Incoming call; indicates you have answered this call.
	Outgoing call; indicates you have made this call.

Presence icons for 9608/9608G

Icon	Name	Description
	Available	User is available and can communicate.
	On a call	User is on a call.
	Busy	User is busy.
	Away	User is away from the deskphone.
	Do not Disturb	User does not want to communicate.
	Out of Office/Offline	Out of Office: User is out from the office. Offline: User wants to appear invisible.
	Unknown	The presence status of the user is unknown or the deskphone is not registered.

Presence icons for 9611G

Icon	Name	Description
	Available	User is available and can communicate.
	On a call	User is on a call.
	Busy	User is busy.
	Away	User is away from the deskphone.
	Do not Disturb	User does not want to communicate.
	Out of Office/Offline	Out of Office: User is out from the office. Offline: User wants to appear invisible.
	Unknown	The presence status of the user is unknown or the deskphone is not registered.

Administrative messages

Your administrator can send important messages such as notification of an early office shut down because of bad weather. The administrator can also send information about an imminent service interruption to your deskphone.

These types of messages can take any of the following forms:

- A text message streaming across the top display line, that also accompanies an audible alert.
- An audible alert broadcast through the Speaker or the headset if that device is active.
- An interrupt screen notifying you that you are receiving an audio alert.


While receiving an audible alert, you can change between the speaker, handset, and headset, can stop the transmission of pushed audio content by going on-hook, and can adjust the volume, as you normally do during a call.


Deskphone stand


You can place the phone on the stand in a flat position or at an angle. To place the phone vertically for wall mounting, reverse the tab located under the switchhook in the top ear piece pocket and ensure that the handset is in the correct position. You need a small screwdriver to lift the tab and reinsert back the reversed tab.


Network information

Your system administrator might ask you to check the phone or network settings to investigate problems. You can get network information from the Avaya Menu.

The Low Network Quality icon  on the top line of the phone display indicates if an issue with the network might be affecting call quality. Navigate to the Network Information screen to view the related network information.

The Low Network Quality icon  on the top line of the phone display indicates if an issue with the network might be affecting call quality. Navigate to the Network Information screen to view the related network information.

An HD Sound Quality icon  on the top line of the phone display indicates that the call is using a good quality sound codec. Navigate to the Network Information screen to view the related network information.

An HD Sound Quality icon  on the top line of the phone display indicates that the call is using a good quality sound codec. Navigate to the Network Information screen to view the related network information.

Network Information has seven different screens for viewing the options: Audio parameters, IP (Internet Protocol) parameters, Quality of Service, Interfaces, 802.1X Parameters, Miscellaneous, and Diagnostics.

Contact your administrator for more information on the options related to network information and the settings that the system requires.

Chapter 2: Avaya Menu

You can use **Avaya Menu** to adjust and customize options and settings for your deskphone, access additional Web-based applications, get information about your phone and network settings, and log out. When you press **Home**, you see one of the following menus, depending on how your administrator has set up your system and on the applications available to you.

 **Note:**

The menus and submenus that appear depend on how the administrator has configured your extension. Some options or submenus might not be available. Contact your system administrator if you have any questions.

- **Options & Settings**
- **Browser**
- **Network Information**
- **About Avaya IP Deskphone**
- **Log Out**

Options & Settings lets you change your call settings, personalize button labels, adjust brightness and contrast, select your ringing pattern, set up favorites, assign speed dial entries, and more.

Browser contains additional web-based applications. If your administrator did not configure the browser option for your deskphone, your deskphone does not display the browser option.

Network Information has a submenu with seven different viewing options: Audio parameters, IP (Internet Protocol) parameters, Quality of Service, Interfaces, 802.1X Parameters, Diagnostics, and Miscellaneous Audio parameters, IP (Internet Protocol) parameters, Quality of Service, Interfaces, 802.1X Parameters, Miscellaneous, and Diagnostics. Your administrator might ask you to use this option to check phone settings or network settings to investigate problems.

About Avaya IP Deskphone provides the release number of your phone software.

Log Out lets you sign off the phone, to protect your settings or to let another user to log in.

Options & Settings

The **Options & Settings** menu contains the following submenus:

- **Call Settings**

- **Application Settings**
- **Screen & Sound Options**
- **Advanced Options**

The **Call Settings** menu includes choices for automatically displaying the Phone screen when, you get an incoming call, when you place a call, when you answer a call, turning call timers on or off, controlling how Redial works, turning **Visual Alerting** on or off, and more.

Assign Speed Dial Entries lets you assign speed dial numbers to up to 10 contacts. When you a press a single digit key and keep the key depressed for a short duration, the phone initiates a call to that person. See [Setting up speed dialing](#) on page 23 for more information.

Assign Favorites Entries lets you build a list of up to nine favorite contacts or features. See [Setting up favorites](#) on page 24 for more information.

The **Application Settings** menu includes choices for personalizing button labels, turning call **History** on or off and including bridged calls in your call **History**.

Screen & Sound options includes choices for adjusting brightness and contrast, ring pattern, background, button clicks, error tones, text size and phone screen width.

Language and Region settings includes choices for setting the display language and the time format.

The **Advanced Options** menu includes choices for integrating other applications such as Microsoft® Exchange Server with your phone.

You can also set AGC (Automatic Gain Control) for your headset, handset, and the speaker audio.

Displaying the Phone screen on dialing

About this task

Use this task to set the deskphone to display the Phone screen when you dial a number to make a call.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Call Settings > Phone Screen on Calling**.
3. Press **Change** to select one of the following:
 - **Yes**: To display the Phone screen when you dial a number.
 - **No**: To remain on the current screen when you dial a number.
4. Press **Save** .

Displaying the Phone screen on receiving a call

About this task

Use this task to display the Phone screen when you receive a call.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Call Settings > Phone Screen on Ringing**.
3. Press **Change** to select one of the following:
 - **Yes**: To display the Phone screen when you receive a call.
 - **No**: To remain on the current screen when you receive a call.
4. Press **Save**.

Displaying call timers

About this task

You can set your call settings to display the duration of calls. You can turn the call timer display on or off.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Call Settings > Display Call Timers**.
3. Press **Change** to select **Yes** or **No**.
4. Press **Save**.

Setting redial options

About this task

Use this task to view a list of last six numbers that you dialed or to dial the last dialed number when you use the redial feature.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Call Settings > Redial**.
3. Press **Change** to select one of the following options:
 - **One Number**: To dial the last dialed number.
 - **List**: To display the last six dialed numbers.

4. Press **Save**.

Configuring visual alerts

About this task

Use this task to cause the LED in the top right corner of the phone to flash when the deskphone gets incoming calls.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Call Settings > Visual Alerting**.
3. Press **Change** to select **On** or **Off**.
4. Press **Save**.

Setting the audio path

You can set your phone to go off-hook on the Speaker or the Headset when you make an on-hook call.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Setting > Call Settings > Audio Path**.
3. Press **Change** to select **Headset** or **Speaker**.
4. Press **Save**.

Setting dialing options

About this task

Your phone has the following two dialing options:

- You can dial a number by picking up the handset, getting a dial tone, and dialing the required number (off-hook dialing).
- You can use the edit dialing feature. If you set this feature, you can enter all or part of the number, use backspace to correct a digit if needed, and when ready, initiate the dialing process using a softkey. Edit dialing may not be available to you, depending on how your system is administered.

If you activated the Limit Number of Concurrent Calls (LNCC) feature in the edit dialing mode, and you start dialing a number when at the same time your deskphone receives a call, the deskphone presents this call to you instead of logging the call.

Procedure

1. Press **Avaya Home**.
2. Press **Select** to select **Options & Settings > Call Settings > Dialing options**.
3. Press **Change** to select **On-hook** or **Editable**.

When on-hook dialing is in effect, dialpad (edit dial) searches are not available.

4. Press **Save**.

Toggling caller name and number

About this task

Use this procedure to display either caller name or caller number if the caller name is too long to fit on the deskphone screen.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Call Settings > Toggle Caller Name and Number**.
3. Press **Change** to select **Yes** or **No**.
4. Press **Save**.

Setting up speed dialing

About this task

Use this task to assign speed dial numbers to your contacts. You can assign speed dial numbers to up to 10 contacts.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Assign Speed Dial Entries**.
3. Scroll and press **Assign** to select the required unassigned line.
4. Press **Select** to select the number that you want to assign.

For more information on using the speed dial feature, see [Speed dialing a person](#) on page 42.

Setting up favorites

About this task

Use this task to create a list of favorite contacts or features for quick access. You can include up to nine favorite items in the favorite list.

Procedure

1. Press **Home**.
2. Press **Select** to choose **Options & Settings > Assign Favorite Entries > Set Favorites**.
3. Perform one of the following actions:
 - To add a favorite contact, press **Contacts**.
 - To add a favorite feature, press **Features**.
4. Press **Select** to choose the required contact or feature.

Personalizing labels

About this task

You can change the labels that the phone displays for your extensions, features, and the system numbers or speed dial buttons. For example, you can change the label for your extension to *My Line*. If you have a button module attached to your deskphone, you can change any of those labels. For example, you can change a Help Desk extension to read *Help Desk*. For information on editing Autodial button labels, see [Assigning labels to auto-dial numbers](#).

Procedure

1. Press **Home**.
 - ★ **Note:**
To edit a label on an attached Avaya BM12 Button Module, press the **Edit** button on the module and proceed to Step 10.
2. Select **Options & Settings**.
3. Press **Select** or **OK**.
4. Select **Application Settings**.
5. Press **Select** or **OK**.
6. Select **Personalize Labels**.
7. Press **Select** or **OK**.
8. Select the label you want to edit.

If the label you want to edit is on the **Features** menu, scroll down past your call appearances, and select the feature you want to edit. If the label you want to edit is on the

System Numbers menu, scroll down past your features and select the system number label you want to personalize.

9. Press **Edit**.
10. Type a new label.
Press **More** then **Clear** to clear all text fields and start again.
11. Press **Save** or **OK**.
12. You might revert back to the default button labels by selecting **Home > Options & Settings > Application Settings > Restore Default Button Labels** and pressing **Select** and then **Default**.

Adjusting the brightness or contrast of the display

About this task

Use this task to adjust the brightness and contrast of deskphone screen or button module as applicable. Contrast adjustment applies only to a deskphone with a black and white display or a button module attached to a deskphone with a color display screen. You cannot adjust the contrast of a deskphone with a colored display.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen & Sound Options**.
3. Press **Brightness** or **Contrast**.
4. Select Phone or an attached button module as applicable.
5. Use the arrow keys to increase or decrease the brightness or contrast.
6. Press **Save**.

Setting the Return to Home Screen option

About this task

Use this task if you want your deskphone to display the home screen after 10 minutes of being idle. The default time is 10 minutes. Your administrator can change the default time to any value between 0 and 30 minutes.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen & Sound Options > Return to Home Screen**.

3. Press **Change** to select one of the following:
 - **Yes**: To turn the feature on.
 - **No**: To turn the feature off.
4. Press **Save**.

Setting the text size

About this task

Use this task to change the size of the text. The large text option is available only for the English language.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen & Sound Options > Text Size**.
3. Press **Change** to select one of the following:
 - **Normal**: To set the default text size.
 - **Large**: To set the large text size.
4. Press **Save**.

Setting a ring tone for incoming forwarded calls

About this task

Use this task to specify the ring tone that you want to hear for incoming calls that are forwarded to your deskphone. You can hear the ring tone that you specified for the:

- Caller.
- First deskphone that forwarded the call.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen & Sound Options > Call Fwd Ring**.
3. Press **Change** to select one of the following:
 - **Caller**: To hear the ring tone that you specified for the caller.
 - **Forwarder**: To hear the ring tone that you specified for the first deskphone that forwarded the call.
4. Press **Save**.

Setting a ring tone for your deskphone

About this task

Use this task to select a ring tone for incoming calls. You can select from a range of classic and rich ring tones. Classic ring tones are simple synthesized sounds. Rich ring tones are richer and more complex sounds.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen & Sound Options > Personalized Ringing**.
3. Press **Change** to select the required ring tone.
4. Press **Save**.

Setting a ring tone for Team Button

About this task

Use this task to set a ring tone for deskphones that you monitor.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen & Sound Options > Team Button Ring Type**.
3. Press **Change** to select the required ring tone.

Setting an alert for a call pickup group

About this task

Use this task to set a call pickup group alert on your deskphone. The call pickup group alert provides a visual or an audio alert on your deskphone when a member in your call pickup group gets a call.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen & Sound Options > Call Pickup Indication**.
3. Press **Change** to select one of the following:
 - **Audible**: Provides an audio alert.

- **Visual:** Provides a visual alert.
 - **Both:** Provides both audio alert and visual alert.
 - **None:** Provides no call pickup alert.
4. Press **Save**.

Setting a ring tone for a call pickup group

About this task

Use this task to select a ring tone for an audio alert on your deskphone for a call pickup group.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen & Sound Options > Call Pickup Ring Type**.
3. Press **Change** to select the required ring tone.
4. Press **Save**.

Changing the background logo

About this task

If your system administrator has set up an alternate background choice, you can change the logo your screen displays. Logos are not available on 9608 deskphones.

Note:

Your system administrator can also change the background logo through the settings file.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen and Sound Options > Background Logo**.
3. Use the **Right/Left** arrows to select the required logo.
4. Press **Save**.

Turning button click sounds on and off

Procedure

1. Press **Home**.

2. Press **Select** to select **Settings > Options & Settings > Screen & Sound Options > Button Clicks**.
3. Press **Change** to turn sound on or off.
4. Press **Save**.

Turning error tones on or off

Your telephone beeps if you make a mistake or take an action that is not allowed. If you do not want to hear error beeps, set your error tone to Off.

Procedure

1. Press **Home**.
2. Press **Select** to select **Settings > Options & Settings > Screen & Sound Options > Error Tones**.
3. Press **Change** to turn error tones on or off.
4. Press **Save**.

Setting key repeat delay

About this task

Use this procedure to set the time for which you must press the navigation key to start the auto repeat process. You can select from the following options:

- No Repeat
- Default
- Short
- Long
- Very Long

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Screen & Sound Options > Key Repeat Delay**.
3. Press **Change** to select the required option.
4. Press **Save**.

Activating mute alerting

You can configure your deskphone to alert you if your deskphone is on mute. The alert can be an audible beep and a visible indication on the top line of your deskphone.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Call Settings > Mute Alerting**.
3. Press **Change** to select from one of the following options:
 - Audible
 - Visual
 - Both
4. Press **Save**.

Enabling wireless headset

About this task

Perform the following procedure to enable a wireless headset to provide alert and receive incoming calls or to only receive incoming calls.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Call Settings > Headset Signaling**.
3. Press **Select** to select any of the following options:
 - **Disabled**: Disables the deskphone to headset setting.
 - **Switchhook and Alert**: Activates the headset if you press **Headset**. When the deskphone receives an incoming call, you hear the alert tone in the headset.
 - **Switchhook only**: Activates the headset if you press **Headset**. When the deskphone receives an incoming call, you do not hear the alert tone in the headset.

Setting the phone screen width

Procedure

1. Press **Home**.
2. Press **Select** to select **Option & Settings > Screen & Sound Options > Phone Screen Width**.

3. Press **Change** to select one of the following options:
 - Full: Each call appearance or feature occupies the entire width of a line.
 - Half: Each call appearance or feature occupies half the width of a line, effectively splitting the screen in half or half to full.
4. Press **Save**.

Changing the display language

About this task

Use this task to change the display language of your deskphone.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Language & Region > Language**.
3. Press **Change** to select the required language.
4. Press **Save**.

Setting the time format

You can change the way your deskphone displays the time on your Phone screen. The time format is either 12 or 24 hours.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Language & Region > Time Format**.
3. Press **Change** to select the required time format.
4. Press **Save**.

Setting headset profile

About this task

Use this task to select an appropriate headset profile that best matches the acoustic of deskphone with your headset.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Advanced Options > Headset Profile**.

3. Press **Change** to select the profile that matches your headset.

For more information on headset profiles that Avaya supports, see the document *Avaya one-X® 96X1 Series IP Deskphone Headset Profiles* at the [Avaya Support](#) website.

4. Press **Save**.

Turning automatic gain control on or off

About this task

The automatic gain control (AGC) automatically adjusts the audio output level to achieve a constant and better quality audio.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Advanced Options > Automatic Gain Control**.
3. Select the Handset, Headset, or Speaker for which you want to turn AGC on or off.
4. Press **Change** to turn AGC on or off.
5. Press **Save**.

Configuring Hearing Aid Compatibility

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Advanced Options > Handset Equalization Operation**.
3. Press **Change** to select one of the following options:
 - Default
 - Audio Opt for audio optimization
 - HAC Opt for hearing aid compatibility optimization
4. Press **Save**.

Integrating other applications with your phone

About this task

If your administrator has set up this option, you can integrate Microsoft® Exchange Server calendar and contacts with your phone. First, establish your credentials by entering the user name and

password you use for Microsoft Exchange Server email purposes and the domain of your Exchange Server. After establishing your credentials, you can set your calendar preferences.

Procedure

1. Press **Home** .
2. Press **Select** to select **Options & Settings > Advanced Options > Exchange Integration**.
3. If you have already set up your credentials and do not want to change them, proceed to Step 5. To establish or change your credentials, select **Email Name & Password** and enter the following:
 - Your Microsoft Exchange server email user name.
 - Your Microsoft Exchange server email password.
 - The location, domain or the IP address, of the server on which Microsoft Exchange runs.
 - Whether you want the deskphone to display a prompt to enter your user name and password every time you access Microsoft Exchange calendar on your phone. Press **Change** to change the setting as required.
4. Press **Save** or **OK**.
5. To set or change your calendar preferences, select **Calendar** and enter the following:
 - Whether or not you want your phone to activate the calendaring feature. Press **Change** to change the **Use Exchange Calendar** setting to **Yes** or **No**.
 - Whether or not you want your phone to remind you of items on your calendar. Press **Change** to change the **Enable Exchange Reminder** setting to **Yes** or **No**.
 - If you want to be reminded of calendar items, indicate in minutes how far in advance you want to get a reminder for your appointments. For example, setting the value to 120 will cause a reminder to appear two hours before the appointment start time and setting the value to 5 will cause a reminder to appear five minutes before the start time of appointment. Setting the value to 0 minutes will cause the reminder to be displayed at the start time of the appointment. To enter minutes, select **More**, then **123** and type the number of minutes.
 - Whether you want the appointment reminder to reappear after a “snooze” period in minutes you specify. For example, setting the **Exchange Snooze Time** value to 5 will cause a Reminder popup to reappear five minutes after you have “snoozed” it.
 - Whether or not you want to hear a tone with a reminder popup window. Press **Change** to change the **Exchange Reminder Tone** setting to **Yes** or **No**.
6. To change your contacts preferences, select **Contact** and configure the following:
 - Whether or not you want your phone to remind you of items on your calendar. Press **Change** to change the **Use Exchange Contacts** setting to **Yes** or **No**.
 - If you want to change the Exchange subscription period, specify in the **Use the Exchange Subscription Period** field.
7. Press **Save** to save your settings and preferences.

*** Note:**

When Exchange calendar is active, a Calendar label displays beneath your last call appearance on the Phone screen.

Browser

Your deskphone includes WML Web browser capability to use additional applications. The applications available through the browser vary depending on how your system administrator has configured your deskphone. For more information, contact your administrator.

Gain access to the browser through **Avaya Menu**. If you do not see the **Browser** option on Avaya Menu, Web applications are not available for your deskphone.

*** Note:**

The 9601 deskphone does not support displaying images through the browser.

Using the WML browser

Procedure

1. Press **Home**.
2. Scroll to **Browser**.
3. Press **Select** or **OK**.

The WML browser opens the home page.

4. Scroll to the link that you want to view.
5. Press **OK** to open the link.
6. Perform any of the following actions:
 - To stop loading the current page, press **Cancel**.
 - To reload the current page, press **Refresh**.
 - To open the home page, press **Home**.
 - To close the browser, press **PHONE**.
 - To edit a text in an application, use the right side call appearance buttons.

Making a call using a Click to dial link

About this task

You can use the Click to Dial feature to make a call from a web page or any other screen that provides a dialing link. Usually, a handset icon indicates a line with this type of link.

Procedure

1. Select the line with the link for the person or number you want to call.
2. Press the line button corresponding to the line with the link or press **OK**.

Result

The deskphone starts a call to the person or number associated with the click to dial link.

Chapter 3: Answering a call

About this task

When you receive an incoming call, the phone selects the incoming call automatically. However, if you are already on a call or if you receive more than one incoming call at a time, you might need to select the call you want to answer manually.

* Note:

The procedure for answering a call might vary depending on how the administrator has configured your phone.

If you do not have the **Go to Phone Screen on Ringing** option enabled and if the phone does not display the Phone screen, incoming calls display on the top line of the screen. You can press the corresponding line button (LED) to answer the call.

Procedure

Answer an incoming call in one of the following ways:

- If you are not on another call, lift the handset or press the line button next to the incoming call, press **Speaker**, **OK**, or **Answer** to answer the call using the speakerphone, or press **Headset** to answer using the headset.
- If you are on another call, from the Phone screen, scroll to the line with the incoming call and press **Answer** or **OK**. The deskphone automatically answers the incoming call and puts the previous call on hold.
-

* Note:

To automatically display the Phone screen when you receive an incoming call, set the **Phone Screen on Ringing** option to **Yes**. For more information, see [Displaying the Phone screen on receiving a call](#) on page 21.

Ignoring an incoming call

About this task

Use this task to turn off the ringer for an incoming call.

Procedure

From the Phone screen, press **Ignore** to turn off the ringer for an incoming call.

Putting a call on hold

Procedure

1. Press **Phone** to view the main Phone screen, if necessary.
2. If you are not active on the line you want to put on hold, select that line.
3. Press **Hold**.

 **Note:**

The phone might display a hold timer when you put a call on hold. For more information, see [Configuring call timers](#) on page 21.

4. Press **Resume** or the line button of the held call to retrieve the call. Your system administrator might have administered the Hold Recall feature, which alerts you visually and with a priority ring to remind you of a held call after a certain period of time.

Muting a call

About this task

While on a call, you can mute the microphone of your phone so that the other party cannot hear you. You can configure your deskphone to alert you if your deskphone is on mute. The alert can be an audible beep and a visible indication on the top line of your deskphone.

Procedure

1. Press **Mute** during a call so that the other person on the call cannot hear you.
2. Press **Mute** again to unmute the call.

 **Note:**

If a call is on mute and you switch between the handset, headset, or speakerphone, the mute is turned off. When you mute the call, the Mute button light is on and the top line displays the Mute icon.

Configuring mute alert

About this task

You can use the mute alert feature to get an alert if you start to speak while you have put your phone on mute. The alert can be an audible beep and a visible indication on the top line of your deskphone. This feature is available only when the Mute Alerting option is set to Audible, Visual, or Both as described in [Activating mute alerting](#) on page 30 and you Mute an active call. Mute alerting is turned off automatically when you press the Mute button to take the call off mute.

Depending on the Mute Alerting setting you choose, the Phone screen provides the following feedback actions and options:

- Audible — If you put a call on mute and start speaking, after 15 seconds, the phone produces a beep to notify you that you have muted your phone.
- Visual — If you put a call on mute and start speaking, after 15 seconds, the phone displays a message that reads “Phone is on mute” on the phone status line.
- Both — Combines the actions and options of both audible and visual alerting.

When you put a call on mute, the phone displays the status of your Mute Alert settings in one of the call appearance lines. If you have enabled Mute Alert, the phone displays “Mute Alert on.” If you have disabled Mute Alert, the phone displays “Mute Alert off.”

Procedure

1. To turn the Mute Alert feature off, press the **Mute Alert on** button.
2. To turn the Mute Alert feature on, press the **Mute Alert off** button.

Switching to another deskphone during an active call

About this task

Use this task to switch to another registered deskphone during an active call when you have registered more than one deskphone with your extension.

Procedure

1. Answer the incoming call from your deskphone.
2. To switch to the other deskphone, press **Bridge** on that deskphone.

Making an attended transfer

Before you begin

You must answer the call before transferring the call to another deskphone.

About this task

An attended transfer is when you transfer an active call to another deskphone number after announcing the call transfer. If the administrator enabled the Transfer on Hang-up feature, you can complete the call transfer by disconnecting the deskphone through any of the following methods:

- Put the handset on the cradle
- Press **Speaker**
- Press **Headset**

Procedure

1. While on the active call, press the **Transfer** softkey.
2. Perform one of the following actions:
 - Dial the number.
 - Call the person from the contacts list or from the history list.
3. Tell the contact about the call when the contact answers your call.
4. To complete the transfer, perform one of the following actions:
 - Disconnect the call if the administrator enabled the Transfer on Hang-Up feature for your deskphone.
 - Press the **Complete** softkey.

Result

Your deskphone transfers the call to the selected number.

Making an unattended transfer

Before you begin

You must answer the call before transferring the call to another deskphone

About this task

An unattended transfer is when you transfer an active call to another deskphone without announcing the call transfer. If the administrator enabled the Transfer on Hang-up feature, you can complete the call transfer by disconnecting the deskphone through any of the following methods:

- Put the handset on the cradle
- Press **Speaker**
- Press **Headset**

Procedure

1. While on the active call, press the **Transfer** softkey.
2. Perform one of the following actions:
 - Dial the number.

- Call the person from the contacts list or from the history list.
3. To complete the transfer, perform one of the following actions:
- Disconnect the call if the administrator enabled the Transfer on Hang-Up feature for your deskphone.
 - Press the **Complete** softkey.

Result

Your deskphone transfers the call to the selected number.

Note:

Unanswered transfers might return to your deskphone as a recalled transfer. In this case, you hear a priority ring and see the display message `Return` next to the call.

Chapter 4: Making a call

About this task

If you are not on a call, dial the number you want to call. If you have earlier configured the dialing option to "editable" you can edit the number as you enter it, then call it using softkeys; see [Making a call using edit dialing](#) on page 43 for information. Use the Phone screen to view and manage calls. Press **Phone** to view the main Phone screen. When the phone displays the Phone screen, press **Phone** to move to the top of the call appearance list.

Procedure

1. Lift the handset, or press **Speaker** or **Headset** (if applicable) or a line button for an available line.
2. Dial the number you want to call.

Making an emergency call

About this task

If your administrator configured emergency calling for your deskphone, the Phone screen displays an **Emerg** softkey to immediately connect you with a preset emergency services number.

Note:

You can make an emergency call when your deskphone is logged out only if your administrator configured this feature for you.

Important:

During phone failover, when the phone switches between system servers due to a system failure, the Emergency softkey might not be available until your phone connects to an alternate server. This process might take a few seconds.

Procedure

1. On the Phone screen, press **Emerg**.
2. Press **Yes** when the deskphone displays a prompt.
Some call servers call back to confirm the emergency status. The phone automatically answers the incoming call on the speaker by going off-hook.
3. To end the emergency call, press **End Call** or press **Speaker**.

Redialing a number

Procedure

1. From the Phone screen, press **Redial**.

The phone redials the last number or a list of the most recent numbers that you have dialed appears from which you can select a number to redial. For information on redial settings, see [Setting Redial Options](#) on page 21.

 **Note:**

The phone clears the last number dialed and redial list if you clear the Outgoing Call Log.

2. If you are working with a redial list, scroll to the number to call and press **Call** or **OK**.

Your system administrator can disable Redial functionality.

Speed dialing a person

Procedure

On the Phone screen, press and briefly hold the dialpad key assigned to the person you want to call. If speed dial numbers are assigned to a button module attached to your phone, press the button assigned to the person you want to call.

To assign speed dial numbers to up to 10 contacts, see [Setting up speed dialing](#) on page 23.

Autodialing a pre-assigned number

About this task

Your system administrator may set up frequently called numbers such as Information Technology or the Help Desk as Autodial numbers, so you can dial them with one touch.

Procedure

1. From the Phone screen, scroll right till you gain access to the System Numbers menu.

To assign labels to or edit labels for your Autodial numbers, see [Assigning labels to auto-dial numbers](#) on page 71.

2. Select the number you want to call.
3. Press the **Call** softkey or the **OK** button.

Making a call using edit dialing

Before you begin

Your administrator has to authorize this function. To set up edit dialing, see [Setting dialing options](#) on page 22.

About this task

Using the Edit dialing feature, you can edit the number before actually dialing by using the **Bksp** softkey. Using softkeys, you can change the number or character format or backspace to "edit" the number before actually dialing it.

Procedure

1. From the **Phone** screen, enter the number you want to call.
2. To edit the number, press **Bksp** to erase the previous character, one character at a time. To change the character format press the **123** softkey.
3. Press **Call** or **OK**.

Calling a person from the contacts list

About this task

You can call any contact from your contacts list. You can find a name by scrolling to it or by using the search box. Use the dialpad keys to enter the first few letters of the name, and the screen displays the first match in your list.

Procedure

1. Press **Contacts**.
2. Select the person or number that you want to call.
3. Find the contact that you want to call by typing the name of the person as listed.

For example, if you added John Smith to your contacts List as "Smith, John", start typing the last name rather than his first name. Each time you press the dialpad, the list display shifts to match your input. You can also scroll up or down to locate the contact.
4. Press **Call** or **OK**.

Making a call using URI dialing

About this task

When you have the edit dial option enabled, you can make a call using the URI dialing feature. To make a call using URI dialing, you must know the URI of the extension that you want to call.

Procedure

1. Enter the number that you want to call.
 - a. Press the **Bksp** softkey to delete the characters you have entered.
 - b. Press the **ABC**, **abc**, or **123** softkey to change between the input methods.
2. Enter the complete URI that you want to call.
3. Press the **Call** softkey to make the call.

Calling a person from the call history

Procedure

1. Press the **History** button.
2. Scroll to the left or right to view a separate list of all calls, missed, or unanswered calls, answered calls, or outgoing calls.
3. Scroll up or down to select the person or number you want to call.
4. Select the person or number you want to call.
5. Press the **Call** softkey or the **OK** button.

Dialing an E.164 number

About this task

E.164 is a standard format of international public telephone numbering. An E.164 number can have up to 15 digits and is preceded by a plus sign (+). Use the following procedure to dial an E.164 number.

Procedure

1. Press asterisk (*) twice or press the plus sign (+) to display the plus sign (+).

If you are using the **SPEAKER**, the **HEADSET**, or the call appearance line, the deskphone displays the plus sign (+) softkey on the screen.
2. Dial the number that you want to call.

Chapter 5: Paging

Initiating a group page

About this task

Using the Group Paging feature, you can make a call to a group of users that your system administrator has set up for you. A group page supports only one-way audio. That is, when you initiate a group page, only you can speak. When you initiate a group page, the page continues till you end it. However, the participants can drop out from the page individually.

To initiate a group page, you must know the group pilot number of the group that you are trying to send a page to. To know about the group pilot number, contact your system administrator.

Procedure

1. Dial the group pilot number.
The extensions in the group that you are calling auto answer the page.
2. Wait for seven seconds before you speak as the deskphone requires that time to allow audio path.
3. Press **End Call** to stop paging.

Chapter 6: About forwarding calls

You can forward your incoming calls to another number or to voice mail. When the Forward button light is on, one or more of the forwarding features are active. The forwarding features available on your phone depend on the options your administrator has set. For more information about the options available on your extension, contact your administrator.

Activating Send All Calls

About this task

When Send All Calls (SAC) feature is on, your incoming calls go directly to a predefined coverage number, typically your voice mail. Incoming calls ring once at your extension and then go directly to a number which is set by your system administrator. If the SAC feature is administered on your phone, a **Send All** softkey appears on the Phone screen for idle calls.

Pressing **Send All** turns Send All Calls on. If it is already on, pressing **Send All** turns it off.

You can also turn **Send All Calls** on or off by using the telephone Features list.

If you enabled the DND affects SAC option, the deskphone activates the SAC feature when you manually change the presence status to DND.

Note:

You must not enable the SAC feature in case you selected the cover all option for the coverage path because enabling both features at the same time can cause duplicate entries in the call log.

Procedure

1. Gain access to the Features screen.
2. Scroll to choose **Send All Calls**.
3. Press **Select** or the corresponding line button to activate the feature.

Activating call forwarding

About this task

Use this task to forward your calls to a specified number.

Procedure

1. Gain access to the Features screen.
2. Scroll to choose **Call Forward**.
3. Press **Select** or the corresponding line button.
4. Enter the destination number to which you want to forward your calls.
5. Press **Enter**.

After you enter the forwarding number, you hear a confirmation tone.

Disabling call forwarding

About this task

Use this task to turn off any call forwarding feature that you activated.

Procedure

1. Press the right navigation button to gain access to the Features screen.
2. Select the active call forwarding feature that you want to turn off.
3. Press **OK** or the line button on which the call forwarding feature appears.

Enabling call forwarding when your line is busy or you do not answer

About this task

Use this task to set a number to which your calls are forwarded when your line is busy or when you do not answer a call. You must enter the telephone number where the calls are forwarded each time you enable this feature.

Procedure

1. From the Phone Screen, gain access to the Features screen.
2. Press **Select** to choose **Call Fwd Busy/No Ans**.
3. Enter the number to which you want to forward your calls.

4. Press **OK** to turn call forwarding off if it is already on.

Setting rules for enhanced call forwarding

About this task

You can use this feature to forward the incoming calls on your deskphone to various destination numbers based on call type and call state.

Procedure

1. From the feature list, select **Enhanced Call Forward**.
The deskphone displays a list of enhanced call forwarding rules.
2. Select the required rules from the following list, and enter the corresponding numbers.

- Forward all calls:
 - Internal [Enter Number]
 - External [Enter Number]
- Forward when busy:
 - Internal [Enter Number]
 - External [Enter Number]
- Forward when no answer:
 - Internal [Enter Number]
 - External [Enter Number]

If you have configured a number for any of the rules, the deskphone displays that number in place of the text Enter Number.

3. Press **Save** to save the destination number.
4. Perform one of the following actions:
 - To activate forwarding for a rule, press **Turn on** for that rule.
 - To activate forwarding for all the rules, press **All on**.

Editing a rule

Procedure

1. Access the **Enhanced Call Forward feature** from the **Features** screen.
2. Press the rule that you want to edit and enter the destination number using the numeric keypad.

3. Press **Save**.

Turning off a rule

Procedure

1. Access the **Enhanced Call Forward feature** from the Features screen.
2. Select the rule that you want to turn off.
3. Press **Turn off**.
4. To turn off all the active rules, press **All off**.
5. Press **Exit**.

Chapter 7: Using the conference feature

You can use conference calls to speak with people from different locations on the same call. Additional conferencing options might be available through Expanded Meet-Me Conferencing. Contact your administrator for more information about this feature.

Setting up a conference call

About this task

Use this task to set up a conference call and add participants to the conference call.

Procedure

1. From the Phone screen, select your active call.
2. Press **Conf**.
3. Dial the telephone number, or call the person from the contacts list, or the History list.
4. Press **Join** when the person answers the call.
5. To add another person, press **Add** and repeat Steps 3 to 4.

Adding a person on hold to a conference call

About this task

Use this task to add a person that you have put on hold to a conference call.

Procedure

1. From the Phone screen, select your active call.
2. Press **Conf**, or press **Add** if you are already in a conference.
3. Select the call on hold that you want to add to the conference.
4. Press **Resume** to take the call off hold.
5. Press **Join** to add the person to the conference call.

Putting a conference call on hold

About this task

When you put a conference call on hold, the other parties can still talk to each other.

Procedure

1. Press **Hold** during a conference call.
2. Press **Resume** or **OK** to resume the conference call.

Dropping the last participant from a conference call

About this task

Use the following procedure to drop the last participant added to the conference call. Once you drop the last added participant, you cannot use the procedure to drop other participants. The deskphone plays an error tone if you try to use the drop method again. If you add another participant after dropping the last added participant, you can use the drop method again to drop this participant.

Note:

This feature is applicable only for a conference call of the AST 1 type.

Procedure

1. From the Phone screen, select your active call.
2. Press **Drop** once the conference is up.

The deskphone drops the last added person from the conference.

Viewing the details for a conference

About this task

Note:

Depending on which server your extension is configured in, you might not be able to see the details of a conference. If you are not able to view the details of a conference, contact your system administrator.

Procedure

1. On the Phone screen, select your active call.
2. Press **Conf**.

3. Dial the telephone number, or call the person from the Contact list, or call the person from the History list.
4. When the person answers, press **Join** or **OK** to add the person to the existing call.
5. Press **Add** and repeat these steps to add another person to the conference.
6. Press **Details** button to access the details on the participants.

Chapter 8: Using bridged call appearances

In addition to your own call appearances, your phone might show one or more bridged call appearances on the display screen. A bridged call appearance is of another user and enables you to determine if that call appearance is in use, answer calls on that appearance, or join a call in progress on that call appearance from your deskphone. You can also make outgoing calls on a bridged call appearance when the bridged call appearance is not in use.

Answering a call on a bridged line

About this task

Answering a call on a bridged line is the same as answering the call on a primary line. If the ringing line is selected, you can answer by picking up the handset or by pressing **Speaker** or **Headset** or **Answer**.

Procedure

1. Select the bridged call that you want to answer.

The ringing line is selected automatically. If you are on another call when a call comes in to a bridged line, you have to select the ringing line.

2. Press **Answer**.

Joining a call on a bridged line

About this task

Use this task to join an existing call on a bridged line.

Procedure

1. Select the bridged call in progress that you want to join.
2. Press the **Bridge** softkey.

Making an outgoing call on a bridged line

About this task

When you make a call on a bridged line, you are using another phone user's line. The caller ID associated with the call you are making might show the call as coming from you or coming from the person whose line you are using. If you have any questions about how the name or extension displays to the person you are calling, contact your administrator.

Procedure

1. Select the bridged line you want to use.
2. Press **OK** to get a dial tone.
3. Dial the phone number, or call the person from the Contacts list, or call the person from the History list.

Excluding others from bridging on to your call

About this task

Use the Exclusion feature to prevent others who are bridged to your extension from bridging onto a specific call. You can activate exclusion only during an active call.

Procedure

1. Access the Features screen during an active call.
2. Scroll down to Exclusion and press **OK** or just press the corresponding line button.

When you activate Exclusion during a call, all parties except you and the calling and the called party are dropped from the call.

Independent alerting for each bridged call appearance

You can configure a unique alerting option for each bridged call appearance on your deskphone if the administrator has enabled the Independent alerting feature for your extension.

The following four options are available:

- **On:** The deskphone plays a ringtone on an incoming call on the bridged appearance.
- **Off:** The deskphone does not play an alert ringtone on an incoming call on the bridged appearance.
- **Delayed:** The deskphone plays an alerting melody after a delay if you do not answer a call on the bridged appearance. Your administrator can configure the delay.

Independent alerting for each bridged call appearance

- **Abbreviated:** The deskphone plays a single beep to indicate a call on the bridged appearance.

Chapter 9: Using the contacts feature

You can save up to 250 names and up to 6 telephone numbers for each name. When you press the **Contacts** button, the phone activates the Contacts search mode automatically.

*** Note:**

Release 6.3 and later do not support voice dialing.

*** Note:**

When you press the **Contacts** button you might not see all of the functions that are described in this chapter. The functions are not available because your administrator has disabled changes to Contacts.

Adding a new contact

About this task

You can add up to six numbers for a contact. Selecting "track presence" as a type allows you to track the contact's telephone presence, for example, not logged in, logged in, in use, or sending all calls to another number.

Procedure

1. Press **Contacts** > **New**.
2. Enter the first and last name using the dialpad.
 - Press the number key that corresponds to the letter or number you want to enter until the letter or number is displayed.
 - If the characters are on the same key, pause before entering the next character.
 - To enter a space, press **0**.
 - Enter remaining letters or numbers.
 - To delete the last character, press the **Bksp** softkey.

*** Note:**

If you want to remove a letter, number, space, or symbol that is in the middle of the text you entered, use the left and right navigation arrows to place your cursor after the

character you want to remove. Once your cursor is in the correct position, press the **Bksp** softkey to remove the character to the left of the cursor.

3. Choose **Yes** in the **Track Presence** field to know the presence information for this contact. If the presence information is available for this person, the deskphone displays the presence icon next to this name of the contact on the Phone screen or the Contact screen.
4. Scroll to the next field.
5. Enter the number.

The contact number can include a-z, A-Z, 0-9, and the following special symbols: comma (,), space, dash (-), dot (.), +, *, #, \$, &, !, ~, ?, +, =, |. A comma (,) inserts a pause during dialing.

6. Press **More > Primary** if applicable.

The primary number is the one that will always display without having to go into contact details.

 **Note:**

When adding a contact number, you must use your enterprise phone number as the Primary number as this number is utilized for presence indication.

7. Scroll to the next field and choose the type of number that you entered: Work, Home, Mobile.
8. If you have another number for this contact, select the next field and repeat Step 5 to Step 6.
You can add up to five additional numbers for this contact, but you can designate only one number as primary.
9. Press **Save** or **OK**.

Editing a contact

Procedure

1. Press **Contacts**.
2. Search for and select the contact you want to edit.
3. Press **More > Edit** or **Details > Edit**.
4. Choose the field you want to edit.
5. Use the dial pad and softkeys to change the contact information.
6. Press **Save** or **OK**.

Searching for a contact

About this task

Use this task to search for a contact that already exist in your contacts list.

You can jump to a certain group of letters in your contacts list by pressing the associated dial pad button. For example, if you press 3, the deskphone displays entries starting with D, E, or F depending on the names of contacts that you might have in the contacts list that start with any of these letters. With each successive dialpad key press, the deskphone displays the matching entries.

Procedure

1. Press **CONTACTS**.
2. Use the dialpad to type the name that you want to search.

If you set up your contacts in the Last Name and First Name format, type the letters of the last name. If you have set up your contacts using a different format, type the most likely letters that matches the contact that you want to find.

3. When the deskphone displays the required match, you can perform any of the following actions:
 - To call the contact, press **Call**.
 - To edit the contact information, press **More > Edit**.

Next steps

If your administrator has set up a corporate contact list or database, you can extend a search. For information, see [Extended searching](#) on page 58.

Extended searching

About this task

If your system administrator has set up a corporate contact list or database and has made the extended searching feature available, you can make a call to other users in your system by name.

Procedure

1. Press **Contacts**.
2. Press **More > Search**.
3. Use the dialpad keys to enter all or part of the first and last name of the person that you want to call.
4. Press **Search** to start the search.

5. If the search displays the name and number of the person that you want to call, select the line on which the name appears, and select an appropriate softkey from the following softkeys:
 - **Call**: To dial the number of the selected person.
 - **Details**: To see detailed information about the selected person.
 - **Cancel**: To return to the Search screen.
6. If the search does not locate the person that you are searching, press **Cancel**, and use this procedure to perform a different search. For example, if you entered a partial first and last name, enter the name in its entirety and search again.

Viewing the details for a contact

Procedure

1. Press **Contacts**.
2. Select the contact that you want to view.
3. Press **Details** to see the information available for that contact.

Selecting Details is the only way to dial a second or third number for a contact.
4. Press the appropriate softkey to call or edit this contact, delete this contact, or return to the Contacts screen.

Assigning specific ring tone to a contact

You can configure the ringtone that your deskphone plays when your deskphone receives a call from a contact in your local phone book. Hence, when you receive an incoming call, you can identify the caller based on the ringer that your deskphone plays. If you have not specified a ringtone for a contact, the deskphone plays the default ringtone.

Procedure

1. Press **CONTACTS**.
2. Select the contact for which you want to assign a ring tone, and press **Details**.
3. Press **Edit**.
4. Scroll to **Ringer**.
5. Press **OK**.
6. Use the Up and Down navigation keys to choose the ring tone of your choice and press **OK**.
7. Press **Back**.
8. Press **Save**.

Deleting a contact

Procedure

1. Press **Contacts**.
2. Select the contact you want to delete.
3. Press **More > Delete**.
4. Press **Yes** to confirm or **No** to cancel.

Accessing Exchange contacts

About this task

You can now access and download your Calendar contacts into your phone using your exchange credentials. You can synchronize and download about 1000 contacts to your phone. These contacts are available under the new screen “Exchange Contacts”. You can also access your local PPM contact numbers under the Local Contacts screen and add the exchange contacts under the PPM. However presence information would be available only for your local contacts. Note: This feature is available only if your administrator has configured your extension for the feature.



Using the Exchange Contacts feature, you can perform the following actions on your *Outlook* contacts from your Deskphone:

- View the contacts.
- Search for a particular contact.
- Call a contact.
- View the details of a contact.
- Copy a contact to your local contacts.

You can not edit or delete an Exchange contact from your Deskphone. You must copy the contact to your local contacts before you modify any details of that contact.

Before using this feature, you must first enter your Exchange server credentials. To know how to enter your Exchange server credentials, see [Integrating other applications with your phone](#) on page 32

Procedure

1. Press **CONTACTS**.
2. Press the **More** softkey twice and then press the **Exchange**  or  softkey.
3. To copy a contact from the Exchange server to the contacts list, press **+Local**.
4. On the Contact Edit screen, specify the name, telephone numbers, and telephone types for the contact.
5. Press **Save**.

Chapter 10: Call History

The History screen provides a list of recent calls, with information about call types, such as missed, answered, or outgoing. The information also provides the caller name and caller number, call time, and call duration. The call log can store up to 21 digits. You can also make a call from the call log.

 **Note:**

The phone displays the caller number only if available.

Call History also shows bridged calls. If you are a member of a call pickup group, the deskphone shows calls that you picked up for another person or calls that you missed and answered by someone with a Forwarding icon. Using this feature, you can review details of types of call pickup. When you have one or more missed calls, the History button lights up and the top line displays Missed Calls icon and the number of missed calls.

If your administrator configured the Busy Station Call Log feature, the deskphone saves all incoming calls that get a busy treatment in the call log. An incoming call gets a busy treatment when:

- All your call appearances are busy and you get an incoming call.
- Your LNCC feature is active and you get an incoming call while you are already on an active call.
- The Restrict Last Appearance parameter is set to yes and you get an incoming call when all but one of your call appearances are busy. The Restrict Last Appearance parameter, if set to Yes, sets the last available call appearance to originating calls only. This setting enables transfer of any of the active calls to another call appearance. If this parameter is set to No, then all call appearances might be occupied for incoming calls and you cannot transfer any of the active calls.

The deskphone displays these calls as Missed calls in the call log. The deskphone also lights up the History LED and shows the missed calls on the top line.

To call a person listed in your Call History, see [Calling a person from the call history](#) on page 44.

Viewing the call history

Procedure

1. Press **History**.

You can go to the top of the list by pressing **History** again.

2. Scroll to the right or left to view separate lists of answered, outgoing, or missed calls.

 **Note:**

When contacts whose presence you have set up to track have called you, the applicable presence icon displays along with the call information. For more information about icons, see [Icons on the phone](#) on page 12.

3. Scroll up or down to view the entries on the list.

Viewing call history details

Procedure

1. Press **History**.
2. Select the number you want to view.
3. Press **Details**.

If you are logging bridged calls as well as your own, bridged call details are identified by either CALL FOR: (calls made to the bridged line) or CALLED FROM: (calls made from the bridged line) preceding the applicable number. To log/not log bridged calls, see [Turning off call history](#) on page 63.

4. To return to the list view, press **Back**.

Adding an entry from the call history to your contacts list

Procedure

1. Press **History**.
2. Select the number you want to add to your Contacts list.
3. Press **+Contact**.
4. If necessary, edit the name and telephone number.
5. Press **Save**.

Removing an entry from call history

Procedure

1. Press **History**.
2. Select the number you want to delete.

3. Press **More**, and then press **Delete**.
4. Press **Yes** to confirm the deletion.

Clearing all call history entries

About this task

Clearing all entries from the call history deletes all the entries for the specific list you are viewing. For example, if you are viewing the Outgoing calls list, the phone deletes only the entries for outgoing calls.

Procedure

1. Press **History**.
2. Press **Clear All** or **OK**.
3. Press **Yes** to confirm.

Turning off call history

Use this task to turn History on or off. If you have bridged call appearances on your phone, you can choose whether or not to include calls to your bridged lines in your call history log.

Procedure

1. Select **Options & Settings > Application Settings**.
2. To select the type of call history logging that you want to turn off, perform one of the following actions:
 - To turn off logging your calls, select **History**.
 - To turn off logging the bridged lines, select **Log Bridged Calls**.
3. Press **Change** or **OK** to turn call history logging on or off.
4. Press **Save**.

Chapter 11: About Team Button

If the administrator configured the Team Button feature for your deskphone, you can monitor another deskphone to:

- See if the monitored deskphone redirects calls to any other deskphone
- See if the monitored deskphone has an active call
- See if the monitored deskphone has an incoming ringing call
- Answer any of the calls that are ringing on the monitored deskphone
- Make a speed dial call to the monitored deskphone by pressing the Team Button softkey when the monitored deskphone does not have an active call
- Transfer an active call to the monitored deskphone by pressing the Team Button softkey




The call redirection feature, SAC, CFWD, or ECF, might be active on the monitored deskphone. The monitoring deskphone can override call redirection when speed dialing or transferring an active call to the monitored deskphone. The override feature ensures that the call made to the monitored deskphone rings on the monitored deskphone and is not routed to the redirected number.






To override call redirection, the administrator must configure on SMGR:

- The monitored deskphone setting that enables the monitoring deskphone to override call redirection directly or through a choice provided to the user
- The monitoring deskphone setting that enables the deskphone to override the call redirection feature that is active on a monitored deskphone





For more information to set the overriding permission on SMGR, see *Administering Avaya Aura® System Manager*.

The following table shows different icons of the Team Button feature for the 9611G IP deskphone.

Icon	Indication
	The monitored extension is idle.
	The monitored extension is on another call.
	The monitored extension is idle, but the user has forwarded all incoming calls to a different extension.

	The monitored extension is on another call, and the user has forwarded all incoming calls to another extension.
	The monitored extension is idle, and the user has enabled Single Ringing.
	The monitored extension is idle, and the user has enabled Multiple Ringing.
	The monitored extension is busy on other call, and the user has enabled Single Ringing.
	The monitored extension is busy on other call, and the user has enabled Multiple Ringing.

The following table shows different icons of the Team Button feature for 9608/9608G deskphones.

Icon	Indication
	The monitored extension is idle.
	The monitored extension is on another call.
	The monitored extension is idle, but the user has forwarded all incoming calls to a different extension.
	The monitored extension is on another call, and the user has forwarded all incoming calls to another extension.

Related Links

[Viewing the status of monitored stations](#) on page 65

[Answering an active call on a monitored extension](#) on page 66

[Speed dialing to a monitored extension](#) on page 66

[Transferring a call to a monitored deskphone](#) on page 66

[Assigning ring tone to a monitored station](#) on page 67

Viewing the status of monitored stations

Procedure

1. Go to the Features screen.
2. Scroll to view the status of all the monitored stations.

 **Note:**

The Team button screen remains active till you close the screen.

Related Links

[About Team Button](#) on page 64

Answering an active call on a monitored extension

Procedure

1. Go to the Features screen.
2. Scroll to choose the monitored extension for which you want to answer the incoming call.
3. Press **Select** or **OK**.

Related Links

[About Team Button](#) on page 64

Speed dialing to a monitored extension

About this task

Use this task to make a call to a monitored deskphone. Ensure that the monitored deskphone to which you make the call is in an idle state. If the monitored deskphone has an active call redirection feature and you can override the feature, the monitored deskphone rings for 30 seconds. If no one answers the call during this time, the system redirects the call to the redirected number.

Procedure

1. Go to the Features screen.
2. Scroll to choose the monitored deskphone that you want to call.
3. Press **Select** or **OK**.

Result

The deskphone makes a call to the monitored extension.

Related Links

[About Team Button](#) on page 64

Transferring a call to a monitored deskphone

Before you begin

You must be on an active call.

About this task

Use this task to transfer an active call to a monitored deskphone. If the monitored deskphone has an active call redirection feature and you can override the feature, the monitored deskphone rings for 30 seconds. If no one answers the call during this time, the system redirects the call to the redirected number.

Procedure

1. Go to the Features screen.
2. Scroll to choose the monitored deskphone to which you want to transfer the active call and press **Select** or **OK**.

The system puts the active call on hold and rings the monitored deskphone.

3. To complete the transfer, perform one of the following actions:
 - Press the **Complete** softkey.
 - On-hook the handset.
 - Press the **Speaker** button.

Related Links

[About Team Button](#) on page 64

Assigning ring tone to a monitored station

About this task

Use this task to set a ring tone for a specific monitored station.

Procedure

1. Press **Home**.
2. Select **Options & Settings > Screen & Sound Options > Team Button Ring Type**.
3. Scroll through the list to select the monitored deskphone.
4. Select the required ring tone from the list.

Related Links

[About Team Button](#) on page 64

Chapter 12: Receiving your messages

Procedure

Press the **Message** button to connect directly to your voice mail system.

The **Message** button and the Message Wait Indicator at the upper right corner glows red to indicate that you have a message. You can use this feature only if your administrator has enabled this feature.

Logging into your voice mail

Procedure

1. To log in to your voice mail, press the **Message** button.
2. Follow the voice prompts from your voice mail system.

Chapter 13: About Features

This topic describes the special features of your deskphone. Your administrator might have set up your deskphone with the features and the call appearances on one screen. The Features screen gives you access to advanced telephony features, such as Call Forwarding and Speed Dial buttons. You can use Send All Calls and Call Forward features to forward incoming calls to other numbers. When you enable the EC500, you can forward calls from your desk phone to your cell phone. Other features such as Call Park, Call Pickup Extended, and Transfer to Voicemail may be available on your Features screen. The Forward menu also lists the forwarding features. The features that are available depend on what your administrator has assigned to your phone.

You can also invoke these features using the Feature Access Code (FAC) . If you activate or deactivate a feature using FAC and the corresponding feature button is not administered on the deskphone, you might not get the indication of the feature activation or deactivation.


In addition to the Features screen, your administrator might also provide selected features on softkeys on the call appearance (Phone) screen. For more information about what features and options are available for your extension, contact your administrator.

Accessing the Features screen

About this task

Use this task to gain access to the **Features** screen.

The option on the **Features** screen display one of the following icons:

- The icon: Indicates the feature is available.
- The icon: Indicates the feature is activated.
- The  icon: Indicates the feature is not available.

For models with LEDs, the LED next to the feature name indicates if the feature is currently on or off. If the light is on, the feature is on.

Procedure

1. On the Phone screen, use the right navigation button to gain access to the **Features** screen.
To return to the main Phone screen, press **Phone** or scroll to the left.
2. Scroll down to see the features that have been administered for your extension.

Feature Table

Feature names are often abbreviated to fit your deskphone or button module display area. Use this table as a cross-reference to standard feature names and their corresponding common abbreviations. Depending on how your system is administered, not all features shown here may be available to you. For detailed information about a feature, click its link in the Feature Name column.

Feature Name	Common Abbreviation
Assigning labels to auto-dial numbers on page 71	Phone number or extension set up by your administrator as an auto-dial number, followed by a telephone icon or "Autodial"
Making an auto intercom call on page 72	Auto Icom; Auto In
Setting up automatic call back on page 72	Auto Callback
Enabling call forwarding on page 47	Cfrwd or CFrwd with a third-party's extension if applicable
Enabling call forwarding when your line is busy or you do not answer on page 47	CFBDA
Parking a call on page 74	Call Park
Unparking a call on page 74	Unparks a parked call
Picking up a call from your pickup group on page 76	Call pickup
Blocking your extension from displaying during calls on page 73	CPN Block
Displaying your extension on outgoing calls on page 73	CPN Unblock
Calling someone in your intercom group on page 76	Dial Icom
Picking up a call to another extension on page 75	Dir Pickup
Configuring simultaneous ringing for multiple phones using EC500 on page 79	EC500
Excluding others from bridging on to your call on page 54	Exclusion
Extending a call to your cell phone (EC500) on page 80	Extend Call
Picking up a call to another call pickup group on page 75	Ext Pickup
Tracing a malicious call on page 76	MCT Act
Recording a call on page 77	Audix Record
Making a priority call on page 77	Priority Call
Send All Calls on page 46	SendAllCalls, SAC, or SAC with a third-party's extension, if applicable

Feature Name	Common Abbreviation
Interrupting a call with a whisper page on page 78	Whisper Act
Presence Information on page 81	Presence
Enhanced Call Forwarding on page 48	ECF
Bridge Call Appearance on page 53	BCA
Hearing Aid Compatibility on page 32	HAC
Activating the LNCC feature on page 78	LNCC

*** Note:**

If you have personalized labels for any of the features available to you, the personalized label displays instead of the feature abbreviations shown here.

Monitoring other extensions at a glance

About this task

If your job requires that you cover or monitor phones for others, your system administrator may set up “busy indicators” so that you can see whether an extension you cover is idle or busy at a glance. Extensions you can monitor with busy indicators show the word “Busy” next to the extension number.

Procedure

1. From the Phone screen, gain access to the System Numbers menu.
2. If necessary, scroll to the line button for the extension you want to check. If that extension is in use, the busy indicator displays next to the word Busy.
3. To call a monitored extension, scroll to the applicable line and press the line button associated with that extension.

Assigning labels to auto-dial numbers

About this task

Autodial numbers are frequently-called numbers in your office or organization, for example, a Help desk number. Your system administrator sets up Autodial numbers, but you can assign and edit their labels. The administrator might just allot a specific button to be an Autodial number, but leave the number itself blank; in this case you can add the number yourself.

Procedure

1. From the Phone screen, scroll right twice to display the System Numbers menu.

2. Scroll to the line to which you want to assign a label or number.

Some labels are not editable. If you can't scroll to a certain line or hear an error tone when you press the line button, you cannot edit that label.

3. Press **Edit**.
4. Use the dialpad to enter the label text or the Autodial number.
5. Press **Save**.

Setting up automatic call back

About this task

When an extension you call is busy, use Automatic Call Back to receive a return call automatically, as soon as that extension is free.

Procedure

1. Gain access to the Features screen when you get a busy signal from the extension that you called.
2. Scroll to **Auto Callback**.
3. Press **OK** or press the corresponding line button.

When you hang up the callback call, the feature deactivates automatically.

Making an auto intercom call

About this task

Use the Auto-Intercom feature to call a specific extension or intercom group.

Procedure

1. Before dialing, scroll right from the Phone screen to access the Features screen.
2. If necessary, scroll down to Auto Icom and press **OK** or just press the corresponding line button.

Two numbers display with the Auto Icom feature, for example "Auto icom 2 3". The first number denotes the intercom group number for the Dial Intercom feature. The next number denotes the extension your administrator has predefined as your automatic intercom destination extension.

3. Press the number(s) that corresponds to the destination extension.
4. Press **Enter** or **OK** to activate the intercom call to that extension, where the call appearance identifies the incoming call with your name followed by ICOM.

Blocking your extension from displaying during calls

About this task

You can override the system (default) setting to display your extension on outgoing calls. Use the Calling Party Number Blocking feature to prevent your number from displaying.

Procedure

1. From the Phone screen, scroll right to access the Features screen.
2. Select **CPN Block**.

To stop calling party number blocking, see [Displaying your extension on outgoing calls](#) on page 73.

3. Press **OK**.
4. Enter the extension number you do not want the called party to see.
5. Press **Enter** or **OK** to start calling party number blocking.

Displaying your extension on outgoing calls

About this task

If you used the CPN Block feature to block your extension's display on calls you make, you can change it back using CPN Unblock. CPN (Calling Party Number) Unblock lets parties you call see your extension.

Procedure

1. From the Phone screen, scroll right to access the Features screen.
2. Select **CPN Unblock**.

To set up calling party number blocking, see [Blocking your extension from displaying during calls](#) on page 73.

3. Press **OK**.
4. Enter your extension number.
5. Press **Enter** or **OK** to stop calling party number blocking.

Parking a call

About this task

Use the Call Park feature to answer a held call at another extension if you are part of a telephone coverage or hunt group. For example, if you need to go to another location to verify some information, you can park your current call and answer it at another location within your group.

Procedure

1. During an active call, gain access to the Features screen.
2. Press **OK** or the corresponding line button to choose **Call Park**.

After parking the call successfully, the deskphone provides a confirmation tone.

Next steps

For answering a parked call from the parked extension, see [Unparking a call](#) on page 74.

Unparking a call

About this task

Use the Call Unpark feature to release a call from the extension at which it was parked, when the extension is part of a coverage or hunt group.

Procedure

1. From the Phone screen, gain access the Features screen.
 2. Press **OK** or the corresponding line button to choose **Call Unpark**.
 3. Enter the original extension from which the call was parked.
 4. Press **Enter** or **OK** to release the call.
-

Setting up enhanced call pickup alerting

About this task

Use this feature to configure audible and visual alert when an incoming call to someone in your corresponding call pickup group is ringing.

Procedure

1. Press **Home**.
2. Select **Options & Settings**.
3. Press **Select** or **OK**.

4. Select **Screen & Sound Options**.
5. Press **Select** or **OK**.
6. Scroll to **Call Pickup Ring Type**.
7. Select the ring tone using the navigation keys.
8. To set the type of alerts for call pickup, select **Call Pickup Indication**.
9. Select the call pickup indication type using the right or left navigation keys.
10. Press **Save**.

Picking up a call to another call pickup group

About this task

When your administrator has set up this feature, you can answer a call ringing at a phone in a call pickup group other than your own.

Procedure

1. Scroll right from the Phone screen to access the Features screen.
2. If necessary, scroll down to Extended Call Pickup and press **OK** or just press the corresponding line button.
3. Answer the call as you normally would.

Picking up a call to another extension

About this task

When your administrator has set up this feature, you can answer a call ringing at another extension without having to be a member of a Pickup group.

Procedure

1. Scroll right from the Phone screen to gain access to the Features screen.
2. If necessary, scroll down to Directed Call Pickup and press **OK** or just press the corresponding line button.
3. Answer the call.

Answering a call for a call pickup group member

Procedure

1. From the Phone screen, gain access to the Features screen.
2. Scroll to **Call Pickup** and press **OK**.

Calling someone in your intercom group

About this task

If your system administrator has set up an intercom group, you can call anyone in that group by pressing a few numbers.

Procedure

1. Before dialing, scroll right from the Phone screen to access the Features screen.
2. If necessary, scroll down to Dial Icom and press **OK** or just press the corresponding line button.

The intercom group number shows next to the Dial Intercom feature and the next denotes the extension your administrator has predefined as your automatic intercom destination extension.

3. Press the number(s) that corresponds to the destination extension.
4. Press **Enter** or **OK** to activate the intercom call to that extension, where the call appearance identifies the incoming call with your name followed by ICOM.

Tracing a malicious call

About this task

Use the Malicious Call Trace (MCT) feature to trace a malicious call. Activating MCT alerts a controller to begin call tracing and provide information for reporting this call. This feature is available only if your administrator has set up the phone system to trace and track malicious calls and there is an attendant or controlling user to oversee the trace.

Procedure

1. During an active call, scroll right from the Phone screen to access the Features menu.
2. If necessary, scroll down to MCT and press **OK** or just press the corresponding line button to start the trace.

An alerting tone and/or flashing LED signifies the trace is active. Hanging up deactivates MCT.

! Important:

Some countries, states, and localities have laws that determine if and under what circumstances you can use Malicious Call Trace (MCT). Before using the MCT feature, you must understand and comply with these laws.

Recording a call

About this task

Use the One Touch Recording (OTR) feature to record a malicious call on your voice mail system. This feature is available only if your administrator has set up the feature on your telephone.

Procedure

1. During an active call, scroll right from the Phone screen to access the Features menu.
2. If necessary, scroll down to OTR and press **OK** or just press the corresponding line button to start recording the call.

! Important:

Some countries, states, and localities have laws that determine if and under what circumstances you can record telephone conversations. Before using the OTR feature, you must understand and comply with these laws.

3. Hang up to stop recording.

Making a priority call

About this task

Use the Priority Calling feature to provide a special type of call alerting between internal telephone users, including the attendant. The called party hears a distinctive ringing when the calling party uses Priority Calling.

Procedure

1. Before dialing, scroll right from the Phone screen to gain access to the Features screen.
2. If necessary, scroll down to Priority Call and press **OK** or just press the corresponding line button.
3. Enter the extension you want to call.
4. Press **Enter** or **OK** to immediately start dialing the priority call to that extension, where the call appearance will show the incoming call as a priority call.

Interrupting a call with a whisper page

About this task

Use the Whisper Page feature to interrupt or “barge in” on another user's call and make an announcement. This feature is unique because only the person on the paged extension can hear the page. Other parties on the call cannot hear the page, and the person who makes the page cannot hear anyone on the call. If the paged user has a display telephone, the paged user can see your caller ID. For example, users A and B are on a call. You have an urgent message for user A and make a whisper page. All three users hear the tone that signals the page, but only user A hears the page itself. You cannot hear user B.

Procedure

1. Scroll right from the Phone screen to gain access to the Features screen.
2. If necessary, scroll down to Whisper Page and press **OK** or just press the corresponding line button.
3. Enter the extension you want to call.
4. Press **Enter** or **OK** to immediately start dialing and deliver your message when the person you called answers.

Activating the LNCC feature


About this task

If you are on a call and do not want to be disturbed from subsequent incoming calls, you can use the Limit Number of Concurrent Calls (LNCC) feature. The LNCC feature controls the number of concurrent incoming calls. If you get an incoming call when your LNCC feature is active and you are already on an active call, the caller gets the busy tone. Thus, the caller does not wrongly assume that you are not at the desk when you do not answer the call or the call is sent to a coverage. If the Busy Station Call Log feature is enabled, the deskphone saves this incoming call as a missed call in the call log.

If you activated the Limit Number of Concurrent Calls (LNCC) feature in the edit dialing mode, and you start dialing a number when at the same time your deskphone receives a call, the deskphone presents this call to you instead of logging the call.

Procedure

1. Gain access to the Features screen.
2. Scroll to select **LimitInCalls**.
3. Press **Select** or the corresponding line button to activate the feature.

The deskphone displays the confirmation screen with the message `Limit Concurrent Incoming Calls` and an LNCC icon  on the top line of the Phone screen.

4. To remove the confirmation screen, press the **OK** softkey.

Deactivating the LNCC feature

Procedure

1. Gain access to the Features screen.
2. Scroll to choose **LimitInCalls**.
3. Press **Select** or the corresponding line button to deactivate the feature.

Result

The deskphone deactivates the Limit Number of Concurrent Calls (LNCC) feature and removes the LNCC icon from the top line.

Visual alert for an encrypted call

Using your Deskphone, you can now see whether an incoming or an outgoing call is encrypted. The secure status is indicated by the secure icon, a padlock, on the call status line.

Note:

Only the connection to and from the phone instrument is encrypted. This encryption may not extend beyond the call server. For 9608/9608G deskphones, if you have set the screen width of your deskphone to half, the deskphone does not show the secure icon.

Activating EC500 for simultaneous ringing on multiple phones

About this task

Using the EC500 feature, you can program your deskphone in such a way that the deskphone and your cell phone rings simultaneously when there is an incoming call. With this feature, you can answer office calls while you are away from your desk. The system administrator has to add your cell phone number and program the desk phone.

Procedure

1. From the Phone screen, gain access to the **Features** screen.
2. Scroll to **EC500** and press **OK**.

Extending a call to your cell phone (EC500)

About this task

You can use the Extend Call feature to receive a call that is active on your office deskphone on your mobile phone. The Extend Call feature uses EC500 Extension to Cellular. You to transfer an office call to your mobile phone and move away from your desk. This feature is programmed by your system administrator.

 **Note:**

Only your administrator can set the destination mobile number.

Procedure

1. During an active call, gain access to the Features screen.
2. Scroll to **Extend Call** , and press **OK** to forward the call to your mobile phone.
3. Answer the call on your cell phone.

The call remains active on your deskphone, so you can switch back to your deskphone at any time.

Chapter 14: Presence

If your administrator enabled the presence feature for your deskphone, the deskphone displays your presence information on the top line. With the Presence feature, you can:

- Track the presence information of a contact for whom you set the **Track Presence** option to **Yes**. You can turn on the **Track Presence** option for a contact while adding a contact or editing the contact details. For more information about adding and editing a contact, see the chapter *Using the contacts feature*.
- Manually change your presence status.

You can use the Track Presence feature to view presence information of users in your Contacts list. With the Track Presence feature, you can see whether the person you want to get in touch with is available or not, and receive an indication of when that person is available to receive a call. In addition, when you are on a call, other users can see that you are busy and can call you later, or contact you using another method.

Related Links

- [Viewing contact presence status](#) on page 81
- [Changing the presence status](#) on page 82
- [Enabling SAC when DND is active](#) on page 82
- [Enabling Away Timer](#) on page 83

Viewing contact presence status

Procedure

1. Press **Contacts**.
2. Scroll to the required contact.

The deskphone displays presence icon for the contact to show the status.

Related Links

- [Presence](#) on page 81

Changing the presence status

About this task

The deskphone displays your presence status on the top line that you can change manually.

Procedure

1. Press **Home**.
2. Press **Select** to select **My Presence**.
3. Scroll and press **Select** to choose any of the following options:
 - **Automatic**: To let the deskphone manage the presence state.
 - **Available**: To show you are available and open for communication.
 - **Busy**: To show you are busy.
 - **Away**: To show you are away from the deskphone.
 - **Do not Disturb**: To show you are not open for communication.
 - **Out of Office**: To show you are out of office.
 - **Offline**: To appear invisible. The deskphone continues to keep the presence subscriptions with the Presence Server. The deskphone also keeps receiving notifications for the contacts for whom the deskphone subscribed to watch.
4. Press **Save**.

Related Links

[Presence](#) on page 81

Enabling SAC when DND is active

About this task

Perform the following procedure to activate the Send All Calls (SAC) feature to redirect calls to the redirection number when you have manually set the presence status to Do Not Disturb (DND). This feature is available only if your administrator configured it for you.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Advanced Options > Presence Integration**.
3. Select **DND affects SAC** and change the value to **Yes**.
4. Press **Save**.

Related Links

[Presence](#) on page 81

Enabling Away Timer

About this task

Perform the following procedure for the deskphone to automatically update the presence status to Away after a predefined time.

Procedure

1. Press **Home**.
2. Press **Select** to select **Options & Settings > Advanced Options > Presence Integration**.
3. Select **Away Timer** and change the value to **On**.
4. Select **Away Timer Value**.
5. Enter the time in minutes. You can enter any value in the range of 5 to 999.
6. Press **Save**.

Related Links

[Presence](#) on page 81

Chapter 15: About Hotline

You can use the Hotline feature to dial a preconfigured number that your system administrator has already set for you.

To dial the hotline number, lift your handset, or press **SPEAKER**. Alternatively, if you are using a headset, press **HEADSET**. The deskphone automatically dials the number that your system administrator has configured for you.

Chapter 16: Using the Calendar

If your administrator has set up the **Exchange Integration** option under **Advanced Options** on the **Avaya Menu**, you can integrate the Microsoft® Exchange Server calendar with your phone. When Exchange Calendar is active, a **Calendar** label displays beneath your last call appearance on the Phone screen. Appointments display in the order of their start times and are removed once the meeting time expires. Calendar information is updated whenever you log in to your phone, when you change calendar settings, when you access the Calendar, and when you press the **Refresh** softkey while viewing an appointment.

*** Note:**

To enable the Calendar and set an appointment advance reminder time and tone, see [Integrating other applications with your phone](#).

Calendar appointment reminders

About this task

If you have set the **Exchange Reminder Time** option to **Yes**, the phone displays a pop-up to remind you of the upcoming calendar appointments when the Exchange Reminder Time that you set is reached.

Procedure

When you get a reminder, perform one of the following actions:

- To ignore the reminder now, but to be reminded after the snooze period, press **Snooze**.
- To ignore the reminder completely, press **Dismiss**.

Reviewing your appointments

About this task

Use this task to view your calendar appointments on your deskphone.

Procedure

1. On the Phone screen, scroll to choose **Calendar**.

The phone displays the appointments in the start-time order.

2. Perform one of the following actions:

- To move backward or forward from one appointment to another, press **Prev** or **Next**.
- To call the person with whom you have the appointment, press **Call**.

 **Note:**

The number of the person whom you want to call must be present on the Appointment Detail.

- To update the calendar with any new appointments that you have set up on your calendar, press **More > Refresh**.
- If you pressed **More** and want to re-display the previous set of softkeys, press **More** again.
- To exit the calendar and return to the Phone screen, press **More > Exit**.

Chapter 17: Limited access during failover

One or more telephone system servers provide your phone with its connectivity, features, and functionality. If a disconnect or switch from one server to another occurs, your phone goes into "failover" mode to keep it operating while alternate server resources are established. Depending on the server your phone is on, an icon may appear on the top display line to notify you that failover is in effect.

Failover has different stages. For example, while your phone transitions to a new server it is in "limbo" and functionality may be limited. Then when the alternate server is active, your phone assumes the functionality available on that server, which may not be the same as your original server. When the original server is restored, your phone transitions back (failback) and functionality may again be limited during the transition. When your phone is back on the original server, normal functionality is restored. Failover and failback are automatic; you have no control over failure mode.

Keep in mind that during failover certain features may not be available and telephone functionality may be limited. Check the softkeys at the bottom of the display to determine the actions you can take during failover; also try the **Phone** button to display the Avaya Menu for possible actions.

Important:

Do not log your telephone off during failover or until normal service is restored on your original telephone server. Logging off during failover, during transition to or from an alternate server, or while your phone is active on an alternate server may cause your phone to become inoperable.

The following conditions apply when your telephone is in failover mode:

- If you are on a call when failover occurs, that call will remain active. You cannot initiate new calls while your phone transitions to the alternate server.
- Certain softkeys may not display and their related functions may be unavailable until transition to the alternate server is complete.
- Call connection may take longer than usual.
- During the transition to a new server, any active conference calls, call transfers, and held calls may be dropped. Incoming calls may not reach you; such calls may go to voice mail.
- Emergency calls may or may not work, depending on the stage of failover and the functionality available on the alternate server.
- The Message Waiting Indicator is cleared, but voice mail may still be available if the voice mail server to which calls are being sent is not in failover.
- Transitions back to the normal server will restore all original functionality.

Chapter 18: Locking and logging in to and logging out of your deskphone

Logging in and out maintains your preferences, call information, and options if you share a telephone with other users.

 **Note:**

Depending on how your phone is administered, for example, whether Call Log History backup is enabled or not, Call history may be lost when you log out your extension.

Logging in to your deskphone

About this task

Perform this task to log in to your deskphone.

Avaya Deskphone SIP 6.3 supports Multiple Device Access (MDA) using which you can register up to 10 SIP devices with your extension. If you register to multiple devices, you can perform functions, such as switching to another registered device during an active call or bridging on to calls at multiple registered devices.

When you log in to the deskphone, the deskphone downloads the call log database. The database contains all the calls that you received when you were logged out. The deskphone adds the offline call logs to the Call History list as missed calls.

Procedure

1. On the login screen, enter the extension number that your administrator assigned to you for login.
2. Press **Enter** or **OK**.
3. Enter the password that your administrator assigned to you.
4. Press **Enter** or **OK**.

Locking and unlocking your telephone

About this task

Locking your phone when it is idle prevents it from being used to make a call, with the exception of an emergency call. When locked, a padlock symbol displays and the only actions you can take are to receive calls, make an emergency call, or unlock the phone. Locking your phone does not log it out; you are still logged in but must enter your login password when you unlock the phone. If you press a button that is not allowed on a locked phone, an error beep sounds.

Note:

Ensure that you do not have any active calls when you lock the phone.

When you lock your phone, your presence status changes to *Away*.

Procedure

1. From the Phone screen or the Features screen, press **Phone Lock**.
2. Press **Lock**.
3. To unlock your phone, press **Unlock** and enter the password you use for telephone login.

Logging out of your deskphone

About this task

Even if you are logged out, the system still logs all calls, which come to your deskphone in the offline state, to a database. The deskphone downloads the database when you log in to the deskphone again.

Procedure

1. Press **Home**.
2. Press **Log Out** to choose **Log Out**.
3. Press **Yes** when the deskphone prompts for confirmation.

Index

Numerics

9608/9608G presence icons [16](#)

A

access limited during failover [87](#)

activating LNCC [78](#)

Active calls

 directing to cell phone [80](#)

administrative messages

 about [17](#)

AGC [32](#)

answering call on a monitored extension [66](#)

Applications [19](#)

Appointments

 reviewing calendar [85](#)

Assigning ring tone

 forwarded calls [26](#)

 monitored station [67](#)

Assigning ring tone,

 monitored station [27](#)

 Team Button [27](#)

attended transfer [38](#)

audio path

 on-hook [22](#)

Autodialing

 calling a person [42](#)

 setting up labels [71](#)

Auto intercom call [72](#)

automatic call back [72](#)

Avaya Menu

 about [19](#)

 options [19](#)

 screen width [30](#)

Away Timer [83](#)

Away Timer enable [83](#)

B

Background logo [28](#)

back-panel [11](#)

blind transfer [39](#)

bridged call appearance

 joining [53](#)

Bridged call appearance

 about [53](#)

Bridged Calls

 answering [53](#)

Bridging [54](#)

browser, WML [34](#)

busy indicator [71](#)

button click sounds

 configuring [28](#)

Button labels

 personalizing [24](#)

Button labels, restoring to default labels [24](#)

Button module, adjusting brightness or contrast [25](#)

C

Calendar

 about [85](#)

 reminders [85](#)

 reviewing appointments on [85](#)

Calendar, preferences [32](#)

Calendar, setup [32](#)

call [77](#)

Call back [72](#)

Call history

 calling from [44](#)

Call History

 icons [15](#)

Call history log

 about [61](#)

calling

 using a click to dial link [34](#)

Calling a number

 using Autodial [42](#)

calling a person

 using speed dial [42](#)

calling a person from the contacts list [43](#)

calling intercom group [76](#)

calling using intercom [76](#)

Calling using intercom [72](#)

Call parking [74](#)

Call pickup [76](#)

call pickup alert indication

 setting [27](#)

Call Timers

 displaying [21](#)

call transfer

 attended [38](#)

 unattended [39](#)

call transfer to monitored deskphone [66](#)

Call unparking [74](#)

change presence status [82](#)

Changing

 display language [31](#)

click to dial

 making a call using [34](#)

conference [51](#)

Conference calls

 about [50](#)

 dropping a participant [51](#)

 putting a call on hold [51](#)

Conference calls (<i>continued</i>)		F	
setting up	50	failover	87
Conference Calls		Favorites	
adding a person on hold	50	setting up	24
contacts		Feature abbreviations	70
adding from call history	62	Features	
calling a person	43	about	69
deleting	60	accessing	69
editing	57	Feature table	70
searching	58	forwarding	
selecting	59	a call	47
Contacts		turning off	47
about	56	Forwarding	
adding a new contact	56	a call	47
coverage	46	Forwarding calls	
		about	46
D			
deactivating LNCC	79	G	
details	51	Go To Phone Screen on Calling	
Dialing Options		setting	20
setting	22	Go To Phone Screen on ringing	
Dial intercom call	76	setting	21
Directed call pickup	75	group page	45
Disconnects		Guest login	88
about	87		
Display		H	
adjusting brightness	25	HAC, hearing aid compatibility	32
adjusting contrast	25	Handset AGC	32
display language		Headset AGC	32
changing	31	headset profile	
		setting	31
E		history	
E.164	44	calling from	44
EC500		History	
Extend Call	80	clearing all call entries	63
edit dialing	43	of calls	61
Edit dialing	22	removing a call from	62
emergency call	41	turning off	63
enable Away Timer	83	viewing call details	62
enable wireless headset	30	viewing for calls	61
Enabling SAC when DND is active	82	Hold	
encrypted call	79	putting a call on hold	37
Enhanced Call Forwarding, rules	48	putting a conference call on hold	51
Error tones		hotline	84
turning off	29		
Exchange contacts	60	I	
Excluding others from bridging	54	icons	
exclusion	54	manual presence state	16
Extension		presence icons for 9608/9608G	16
blocking display of	73	icons in telephone display	
unblocking display of	73	about	12
		Incoming call	

Index

Incoming call (<i>continued</i>)	
ignoring	36
incoming calls	
answering	36
forwarding	47
sending to coverage	46
Incoming calls	
directing to multiple telephones	79
Incoming Calls	
forwarding when busy or no answer	47
Intercom group	76

K

key repeat delay	29
------------------------	--------------------

L

Large text, Text size	26
legal notices	
LNCC	
activating	78
deactivating	79
Locking your telephone	89
Logging in to your deskphone extension	88
Logging in to your telephone	88
Logging out of your telephone extension	88
Login as a guest user	88
Logo	28

M

making a call	41
malicious call tracing	76
manual presence state icons	16
messages	
about	17
Messages	
receiving	68
Microsoft Exchange integration	32
monitoring other extensions	71
multiple device access	38
mute alerting	38
muting calls	37 , 38

N

name	23
navigation arrows	
right and left	12
up and down	12
navigation tips	12
Network information	
viewing	17

O

On-hook dialing	22
Options & Settings	
about	19
call history	63
call pickup alert settings	27
configuring visual alerts	22
go to phone screen on calling	20
go to phone screen on ringing	21
phone screen on calling	20
redial settings	21
Setting Autodial numbers	71
setting call pickup ring tone	28
Setting dialing options	22
Setting favorites	24
setting ring tone	27
Setting speed dial numbers	23
outgoing calls	
edit dialing a number	43
making a call	41
making a call on a bridged line	54
redialing a number	42
Outgoing Calls	
blocking extension display	73
unblocking extension display	73

P

page	78
Parking calls	74
Phone Screen on Calling	
setting	20
Phone Settings	
about	19
Picking up calls	75 , 76
presence	81
presence icons for 9608/9608G	16
Priority Call	77
problems with telephone	87

R

recording a call	77
redial	42
redial options	
setting	21
Return to Home Screen option	25
Ring tone	
selecting	27
setting for call pickup	28

S

screen width	
setting	30

Search
 database [58](#)
 extended [58](#)
 secure
 calls [79](#)
 selecting ring tone [27](#)
 SENDALL [46](#)
 setting
 headset profile [31](#)
 setting, editing, disabling [48](#)
 setting headset profile [31](#)
 Speaker [32](#)
 speed dialing
 calling a person [42](#)
 Speed Dialing
 setting up [23](#)
 switching deskphone [38](#)

T

team button
 speed dialing [66](#)
 Team Button [64](#), [66](#)
 transferring a call to a monitored deskphone [66](#)
 telephone display icons [12](#)
 about [12](#)
 telephone stand
 about [17](#)
 deskphone stand [17](#)
 Time format [31](#)
 toggling [23](#)
 tracing calls [76](#), [77](#)

U

unattended call transfer [39](#)
 Unparking calls [74](#)
 URI dialing, making a call [43](#)

V

view contact presence status [81](#)
 Visiting user, logging in as [88](#)
 Visual Alerts
 configuring [22](#)
 Voice mail, logging in [68](#)

W

Whisper page [78](#)
 wireless headset [30](#)
 wireless headset enabling [30](#)
 WML browser, browser [34](#)