

Using Avaya J100 Expansion Module for SIP

© 2023-2025, Avaya LLC All Rights Reserved.

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Documentation disclaimer

"Documentation" means information published in varying media which may include product information, subscription or service descriptions, operating instructions and performance specifications that are generally made available to users of products. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of Documentation unless such modifications, additions, or deletions were performed by or on the express behalf of Avaya. End user agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End user.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or Documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on Avaya hardware and software. Please refer to your agreement with Avaya to establish the terms of the limited warranty. In addition, Avaya's standard warranty language as well as information regarding support for this product while under warranty is available to Avaya customers and other parties through the Avaya Support website: https://support.avaya.com/helpcenter/getGenericDetails?detailId=C20091120112456651010 under the link "Warranty & Product Lifecycle" or such successor site as designated by Avaya. Please note that if the product(s) was purchased from an authorized Avaya channel partner outside of the United States and Canada, the warranty is provided by said Avaya Channel Partner and not by Avaya.

"Hosted Service" means an Avaya hosted service subscription that You acquire from either Avaya or an authorized Avaya Channel Partner (as applicable) and which is described further in Hosted SAS or other service description documentation regarding the applicable hosted service. If You purchase a Hosted Service subscription, the foregoing limited warranty may not apply but You may be entitled to support services in connection with the Hosted Service as described further in your service description documents for the applicable Hosted Service. Contact Avaya or Avaya Channel Partner (as applicable) for more information.

Hosted Service

THE FOLLOWING APPLIES ONLY IF YOU PURCHASE AN AVAYA HOSTED SERVICE SUBSCRIPTION FROM AVAYA OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE), THE TERMS OF USE FOR HOSTED SERVICES ARE AVAILABLE ON THE AVAYA WEBSITE, HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO UNDER THE LINK "Avaya Terms of Use for Hosted Services" OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, AND ARE APPLICABLE TO ANYONE WHO ACCESSES OR USES THE HOSTED SERVICE. BY ACCESSING OR USING THE HOSTED SERVICE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE DOING SO (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THE TERMS OF USE. IF YOU ARE ACCEPTING THE TERMS OF USE ON BEHALF A COMPANY OR OTHER LEGAL ENTITY, YOU REPRESENT THAT YOU HAVE THE AUTHORITY TO BIND SUCH ENTITY TO THESE

TERMS OF USE. IF YOU DO NOT HAVE SUCH AUTHORITY, OR IF YOU DO NOT WISH TO ACCEPT THESE TERMS OF USE, YOU MUST NOT ACCESS OR USE THE HOSTED SERVICE OR AUTHORIZE ANYONE TO ACCESS OR USE THE HOSTED SERVICE.

Licenses

The Global Software License Terms ("Software License Terms") are available on the following website https://www.avaya.com/en/legal-license-terms/ or any successor site as designated by Avaya. These Software License Terms are applicable to anyone who installs, downloads, and/or uses Software and/or Documentation. By installing, downloading or using the Software, or authorizing others to do so, the end user agrees that the Software License Terms create a binding contract between them and Avaya. In case the end user is accepting these Software License Terms on behalf of a company or other legal entity, the end user represents that it has the authority to bind such entity to these Software License Terms.

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, Hosted Service, or hardware provided by Avaya. All content on this site, the documentation, Hosted Service, and the product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Virtualization

The following applies if the product is deployed on a virtual machine. Each product has its own ordering code and license types. Unless otherwise stated, each Instance of a product must be separately licensed and ordered. For example, if the end user customer or Avaya Channel Partner would like to install two Instances of the same type of products, then two products of that type must be ordered.

Third Party Components

The following applies only if the H.264 (AVC) codec is distributed with the product. THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE HTTP://WWW.MPEGLA.COM.

Service Provider

WITH RESPECT TO CODECS, IF THE AVAYA CHANNEL PARTNER IS HOSTING ANY PRODUCTS THAT USE OR EMBED THE H.264 CODEC OR H.265 CODEC, THE AVAYA CHANNEL PARTNER ACKNOWLEDGES AND AGREES THE AVAYA CHANNEL PARTNER IS RESPONSIBLE FOR ANY AND ALL RELATED FEES AND/OR ROYALTIES. THE H.264 (AVC) CODEC IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO: (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION FOR H.264 (AVC) AND H.265 (HEVC) CODECS MAY BE OBTAINED FROM MPÈG LÁ, L.L.C. SEE HTTP:// WWW.MPEGLA.COM.

Compliance with Laws

You acknowledge and agree that it is Your responsibility to comply with any applicable laws and regulations, including, but not limited to laws and regulations related to call recording, data privacy, intellectual property, trade secret, fraud, and music performance rights, in the country or territory where the Avaya product is used.

Preventing Toll Fraud

"Toll Fraud" is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If You suspect that You are being victimized by Toll Fraud and You need technical assistance or support, please contact your Avaya Sales Representative.

Security Vulnerabilities

Information about Avaya's security support policies can be found in the Security Policies and Support section of https://support.avaya.com/security.

Suspected Avaya product security vulnerabilities are handled per the Avaya Product Security Support Flow (https://support.avaya.com/css/P8/documents/100161515).

Downloading Documentation

For the most current versions of Documentation, see the Avaya Support website: https://support.avaya.com, or such successor site as designated by Avaya.

Contact Avaya Support

See the Avaya Support website: https://support.avaya.com for Product or Cloud Service notices and articles, or to report a problem with your Avaya Product or Cloud Service. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: https://support.avaya.com (or such successor site as designated by Avaya), scroll to the bottom of the page, and select Contact Avaya Support.

Note

Using a cell, mobile, or GSM phone, or a two-way radio in close proximity to an Avaya IP telephone might cause interference.

Regulatory Statements

Australia Statements

Handset Magnets Statement:



Danger:

The handset receiver contains magnetic devices that can attract small metallic objects. Care should be taken to avoid personal injury.

Industry Canada (IC) Statements

RSS Standards Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- 1. This device may not cause interference, and
- This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- 1. L'appareil ne doit pas produire de brouillage, et
- L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Radio Transmitter Statement

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (EIRP) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Radiation Exposure Statement

This equipment complies with FCC & IC RSS102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Cet équipement est conforme aux limites d'exposition aux rayonnements ISEDétablies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

Japan Statements

Class B Statement

This is a Class B product based on the standard of the VCCI Council. If this is used near a radio or television receiver in a domestic environment, it may cause radio interference. Install and use the equipment according to the instruction manual.

この装置は、クラスB情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。

取扱説明書に従って正しい取り扱いをして下さい。

Denan Power Cord Statement



Danger:

Please be careful of the following while installing the equipment:

 Please only use the connecting cables, power cord, and AC adapters shipped with the equipment or specified by Avaya to be used with the equipment. If you use any other equipment, it may cause failures, malfunctioning, or fire.

VCCI-B

 Power cords shipped with this equipment must not be used with any other equipment. In case the above guidelines are not followed, it may lead to death or severe injury.



警告

本製品を安全にご使用頂くため、以下のことにご注意ください。

- 接続ケーブル、電源コード、AC アダプタなどの部品は、必ず 製品に同梱されております添付品または指定品をご使用くだ さい。添付品指定品以外の部品をご使用になると故障や動作 不良、火災の原因となることがあります。
- 同梱されております付属の電源コードを他の機器には使用しないでください。上記注意事項を守らないと、死亡や大怪我など人身事故の原因となることがあります。

México Statement

The operation of this equipment is subject to the following two conditions:

- 1. It is possible that this equipment or device may not cause harmful interference, and
- This equipment or device must accept any interference, including interference that may cause undesired operation.

La operación de este equipo está sujeta a las siguientes dos condiciones:

- Es posible que este equipo o dispositivo no cause interferencia perjudicial y
- Este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

Brazil Statement

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados

Power over Ethernet (PoE) Statement

This equipment must be connected to PoE networks without routing to the outside plant.

Taiwan Low Power Radio Waves Radiated Devices Statement

取得審驗證明之低功率射頻器材,非經核准,公司、商號或使 用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信;經發現有干擾現象時,應 立即停用,並改善至無干擾時方得繼續使用。前述合法通信,指依電信管理 法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及 醫療用電波輻射性電機設備之干擾。

U.S. Federal Communications Commission (FCC) Statements

Compliance Statement

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

To comply with the FCC RF exposure compliance requirements, this device and its antenna must not be co-located or operating to conjunction with any other antenna or transmitter.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- This device must accept any interference received, including interferences that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designated to provide reasonable protection against harmful interferences in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interferences to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment . This equipment should be installed and operated with minimum distance of 8 in or 20 cm between the

radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ENERGY STAR® compliance statement



As an ENERGY STAR partner, Avaya LLC has determined that this product meets the ENERGY STAR guidelines for energy efficiency. Information on the ENERGY STAR program can be found at www.energystar.gov. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency.

EU Countries

This device when installed complies with the essential requirements and other relevant provisions of the EMC Directive 2014/30/EU, Safety LV Directive 2014/35/EU, and Radio Equipment Directive 2014/53/EU. A copy of the Declaration may be obtained from https://support.avaya.com or Avaya LLC, 350 Mt. Kemble Avenue, Morristown, NJ 07960 USA.

WiFi transmitter

- Frequencies for 2412-2472 MHz, transmit power: < 20 dBm
- Frequencies for 5180-5240 MHz, transmit power: < 20 dBm

BT transmitter

Frequencies for 2402-2480 MHz, transmit power: < 6.0 dBm

General Safety Warning

- Use only the Avaya approved Limited Power Source power supplies specified for this product.
- · Ensure that you:
 - Do not operate the device near water.
 - Do not use the device during a lightning storm.
 - Do not report a gas leak while in the vicinity of the leak.
 - For Accessory Power Supply in Avaya J100 Series IP Phones

 – Use Only Limited Power Supply Phihong Technology Co. Ltd. Model: PSAC12R-050, Output: 5VDC, 2.4A.

Trademarks

The trademarks, logos and service marks ("Marks") displayed in this site, the Documentation, Hosted Service(s), and product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its affiliates, its licensors, its suppliers, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the Documentation, Hosted Service(s) and product(s) should be construed as granting, by implication, estoppel, or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party.

Avaya is a registered trademark of Avaya LLC.

All non-Avaya trademarks are the property of their respective owners.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Avaya LLC is under license.

Device Usage Consent

By using the Avaya device, you agree that Avaya, from time to time, may collect network and device data from your device and may use such data in order to validate your eligibility to use the device.

Contents

Chapter 1: Introduction	7
Purpose	7
Change history	7
Chapter 2: Overview	8
Avaya J100 Expansion Module overview	8
Physical layout	10
Avaya J100 Expansion Module icons	11
Avaya J100 Expansion Module upgrade indication	11
The expansion module lines and icons in CCMS mode	12
Chapter 3: Call operations	13
Making a call	
Answering a call	
Answering a call when on another call	14
Accessing features	14
Applications	14
Applications overview	14
Accessing applications	
Chapter 4: Settings	16
Customizing the display	16
Display Mode	
Setting a background image unique to JEM24 display	17
Setting the custom screen saver image	
Adjusting the expansion module brightness	19
Setting the text size	19
Customizing keys	20
Adding a labeled key	20
Relabeling a key	
Moving a key	
Deleting a key	
Restoring customized keys to default	22
Chapter 5: Troubleshooting	23
Viewing the expansion module details	23
Viewing the expansion module details from Administration menu	23
Viewing the expansion module details from Main menu	23
Common troubleshooting scenario	24
Chapter 6: Resources	25
Finding documents on the Avaya Support website	25
Avaya Documentation Center navigation	25
Viewing Avaya Mentor videos	27

Support27

Chapter 1: Introduction

Purpose

This document is intended for end users and provides an overview of the features available on Avaya J100 Expansion Module for SIP firmware. It also describes procedures to set up Avaya J100 Expansion Module functionalities.

Change history

Issue	Date	Summary of changes
Release 4.0.14, Issue 1	October 2022	Updated "Settings" chapter.
Release 4.1.2, Issue 1	October 2023	Added "Display Mode"

Chapter 2: Overview

Avaya J100 Expansion Module overview

With Avaya J100 Expansion Module (JEM24), you can extend the number of call appearances and feature buttons on Avaya J169/J179 IP Phone and Avaya J189 IP Phone. The call appearances and features appears on Avaya J100 Expansion Module and the corresponding lines of the phone.

You can connect a maximum of three expansion modules to Avaya J169/J179 IP Phone and two expansion modules to Avaya J189 IP Phone. Avaya J189 IP Phone also has a secondary screen that behaves as an inbuilt module. When an expansion module is connected to a phone, it inherits the display properties of the phone.

The following table shows the number of available lines corresponding to the number of button modules attached to the phone:

Expansion modules	Calling lines / Features / Applications	Switching between pages
1	72 (24 on each page)	Yes
2	24	No
3	24	No

You cannot use the toggle button on the JEM24 in the following scenarios:

- When you connect more than one JEM24 to the phone.
- When you connect one or more JEM24 to an Avaya J189 IP Phone.

The following table shows the number of physical feature keys available on the J100 phone models and JEM24s:

Phone model	Features keys on the phone	Features keys on built- in expansion module	Features keys on JEM24 expansion module
J129	3	NA	Does not support JEM24
J139	4	NA	Does not support JEM24
J159	4	6	Does not support JEM24
J169	8	NA	24
J179	8	NA	24
J189	10	6	24

The following table shows the number of feature keys available on the J100 phone models and JEM24s:

Phone model	Feature keys accessible on the phone screen	Feature keys accessible on the built in Expansion Module using the JEM24 toggle button	Feature keys accessible with only one Expansion Module	Feature keys accessible on first JEM24 when there is more than one JEM24	Feature keys accessible on 2nd JEM24	Feature keys accessible on 3rd JEM24
J129	NA	NA	NA	NA	NA	NA
J139	96	NA	NA	NA	NA	NA
J159	96	25-48	NA	NA	NA	NA
J169	96	NA	25-96	25-48	49-72	73-96
J179	96	NA	25-96	25-48	49-72	73-96
J189	96	25-48	49-72	49-72	73-96	NA

Avaya J100 Expansion Module can be placed in two stand positions and a wall-mount position with the phone.

Note:


The wall mounting bracket for Avaya J100 Expansion Module must be ordered separately, along with the wall mounting kit. For Avaya J100 Expansion Module wall mounting instructions, see *Installing and Administering Avaya J100 Series IP Phones*.

If you use PoE to power up your phone, you can attach only one expansion module. To attach more expansion modules, use a power supply unit.

Important:

Avaya J100 Expansion Module does not support hot-plugging. Connect all Avaya J100 Expansion Modules to the phone before connecting the phone to a power source.

Physical layout

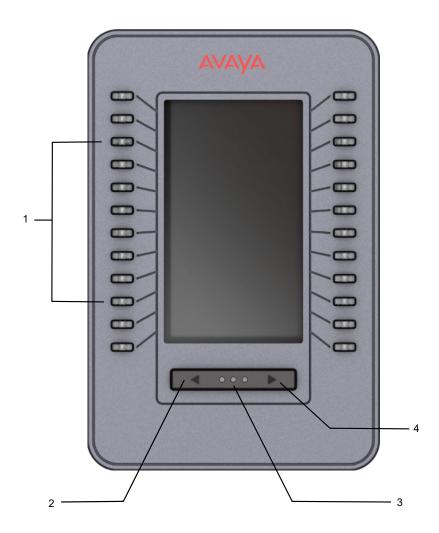

No.	Name	Description
1	Line buttons with integrated LEDs	Line buttons used for receiving calls, making outgoing calls, and answering them for other extensions or accessing features.
		The LEDs integrated in the line buttons are synchronized with the LEDs on the phone. Turning off the backlight of the phone turns off the line button LEDs on the expansion module.
		Line button LEDs indicate the following:
		The green light indicates an incoming call or an enabled feature.
		The red light indicates that the line is in use or the feature has been disabled.
2, 4	Left and Right page buttons	Buttons used to switch to a different active page.
3	Active page LEDs	Three LEDs indicating which active page is displayed.
		Note:
		The indication will change if only one Avaya J100 Expansion Module if attached. If more expansion modules are attached, the first LED is lit permanently.

Avaya J100 Expansion Module icons

Avaya J100 Expansion Module uses the icons of the phone model it is attached to.



Note:

The icons of Avaya J100 Expansion Module attached to Avaya J169 IP Phone are grayscaled.

For more information about Avaya J100 Expansion Module icons, see the related section in the user guide of your phone model.

Avaya J100 Expansion Module upgrade indication

Avaya J100 Expansion Module firmware upgrade process is indicated by displaying the Upgrade notification on the expansion module.

Once the updated firmware has been downloaded, Avaya J100 Expansion Module displays the following notification: This device will be out of service for 3 minutes to apply the update.

Press the corresponding line button for Apply now or Apply tonight option to select the suitable upgrade time.



Note:

When the Upgrade notification is displayed, the expansion module screen saver is disabled and the backlight is not turned off.

The expansion module lines and icons in CCMS mode

In the IP Office environment, Avaya J169/J179 IP Phones use CCMS over SIP mode which provides an extended feature set.

In the Avaya Aura[®] environment, the lines are numbered in rows. You can scroll from the top right line to the top left one, then you are switched to the row below.

In CCMS mode, the lines are numbered in columns. First, you can scroll from top to bottom of the left column, then you are switched to top of the right column.

Important:

There is no icons support in CCMS mode, the text labels start at the beginning of the line.

Chapter 3: Call operations

Making a call

About this task

Use this procedure to make a call using the expansion module lines. An outgoing call is indicated with the outgoing call icon. The LED integrated in the line buttons are synchronized with the LED's on the phone (the green LED combined with the red LED).

Procedure

- 1. Lift the handset and press the line button corresponding to the extension number to which you want to call.
- 2. **(Optional)** Press the line button without lifting the handset to make a call using the speakerphone.
- 3. Press End call to end a call.

Answering a call

About this task

Use this procedure to answer an incoming call using the expansion module line buttons. An incoming call is indicated with the incoming call icon and the blinking green LED.

Procedure

Do one of the following:

- Press the flashing line button on Avaya J100 Expansion Module to activate the default audio device and answer the call.
- Pick up the handset.

When you answer the call, the incoming call icon changes, and the phone screen displays the call.

Note:

When the phone is locked, Avaya J100 Expansion Module lines will not be used. However, you can answer an incoming call using the expansion module line buttons.

Answering a call when on another call

About this task

Use this procedure to answer an incoming call during another call by using the expansion module line buttons.

Procedure

On Avaya J100 Expansion Module, press the flashing line button to activate the default audio device and answer the call.

The phone puts the first call on hold and moves to the second call.

Accessing features

About this task

If your system administrator has activated features such as Call Forwarding, Call Pickup, Auto Callback, you can enable and disable them on the Avaya J100 Expansion Module using feature labels. Some feature labels might be preset by the system administrator.

Procedure

On the Avaya J100 Expansion Module, press the labelled line button next to the feature you want to enable or disable.

The LED flashes green or red depending on whether the feature is enabled or disabled.

Applications

Applications overview

On Avaya J100 Expansion Module, you can quickly access applications like Contacts, Recents and Calendar by pressing the corresponding labelled button.

The following table shows some examples of applications available on the expansion module, their icons and description:



Note:

The application icons on the expansion module are available only with the SIP firmware.

Application name	Icons	Description
Activate screen saver		Immediately displays the selected screen saver on the phone and the expansion module.
Calendar		Access to Microsoft® Exchange Server calendar from the expansion module.
Contacts		Access to the Contacts list from the expansion module.
Recents	9	Access to the Recents list from the expansion module.
Lock	6	Immediately locks the phone and the expansion module screen.
Log out		Opens the Log out confirmation window.
My Presence		Opens My Presence window to manage your status automatically or manually.

Accessing applications

Procedure

On the Avaya J100 Expansion Module, press the labelled line button next to the application you want to access.

Avaya J100 Expansion Module will display the application screen or activate the selected application immediately.

Chapter 4: Settings

Customizing the display

You can set the display mode, a customized screen saver and background image for Avaya J100 Expansion Module (JEM24). Your administrator provides access to set these images.

You can set the background and screen saver image of the JEM24 using the:

- · Pre-defined images
- Customized images
- Images that are the same as the primary display images

If you and your administrator do not set the screen saver and background image for the JEM24, the phone uses the Avaya Device Image by default.

If your administrator makes the required settings, you can set the same background and screen saver image for the primary display and the JEM24 module. The JEM24 display reflects any changes made to the primary display. If you select a custom image for the primary display, the JEM24 displays the default Avaya device image.

Use the phone **Settings** menu to configure the following Avaya J100 Expansion Module features:

- Background image
- Screen saver
- Font size
- Brightness
- Display mode

Note:

Avaya J100 Expansion Module does not support adjusting the display contrast.

Avaya J100 Expansion Module displays fewer characters in a line than the JBM24 Button Module. If required, decrease the font size in the Settings menu on the phone.

Display Mode

With the Display Mode feature, you can personalize the phone display according to your choice of display and font color. You can change the display mode of your phone to Dark or Light. The font color is black if you set the display mode to Light. The font color is white if you set the display mode to Dark.

Changing the display mode impacts most of the skins, including the following:

- Soft keys
- The top-line divider
- Calendar components
- Predefined backgrounds and screen savers
- · Line highlights
- Skins for dialogs and toasts and scroll bars
- The progress bar

Changing the display mode for the main screen changes the display mode for the secondary screen and the attached expansion modules.

Changing the phone display mode

About this task

You can change the phone display mode to Dark or Light with the Display Mode feature. The font color is black if you set the display mode to Light. The font color is white if you set the display mode to Dark.

Before you begin

Contact your phone administrator if you cannot see the settings to change the display mode.

Procedure

- 1. Press Main Menu.
- Scroll to Settings and press Select.
- 3. Scroll to **Display** and press **Select**.
- 4. Scroll to **Display Mode** and press **Select**.
- Press Toggle to switch between Light and Dark.
- 6. Press Save.

Related links

Modifying your Display Mode (video)

Setting a background image unique to JEM24 display

About this task

Use this procedure to set a custom background image for Avaya J100 Expansion Module (JEM24).

You can set a built-in image or a custom image for your JEM24 display. Contact your administrator to upload custom background images to the phone.

You can change the background image of the JEM24 using the phone menu.

Note:

You cannot set a background image when the phone is downloading custom images. During the download, the phone screen displays Downloading images to module.

Before you begin

Ensure that your administrator provides access to set a background image.

Procedure

- 1. On the phone, press Main Menu.
- 2. Scroll to **Settings** and press **Select**.
- 3. Scroll to **Display** and press **Select**.
- 4. Scroll to **Background**, and press **Select**.
- 5. Select Module Display.

You can set a background image for Avaya J100 Expansion Module. You can use either the built-in images or a custom image from the image list.

- 6. Scroll to the new image.
- 7. (Optional) To preview the image, press Preview, and then press Back.
- 8. Press **Select**.
- 9. Press Save.

Setting the custom screen saver image

About this task

Use this procedure to set a custom screen saver image for Avaya J100 Expansion Module (JEM24).

You can set a built-in image or a custom image for your JEM24 display. Contact your administrator to upload custom screen saver images to the phone.

You can change the screen saver image of the JEM24 using the phone menu.



Note:

You cannot set a screen saver image when the phone is downloading custom images. During the download, the phone screen displays Downloading images to module.

Before you begin

Ensure that your administrator provides access to set a screen saver image.

- 1. On the phone, press **Main Menu**.
- Scroll to Settings and press Select.
- 3. Scroll to **Display** and press **Select**.

- 4. Scroll to Screen saver, and press Select.
- 5. Select Module Display.

You can set a screen saver for Avaya J100 Expansion Module. You can use either the built-in images or the custom image from the image list.

- 6. Scroll to the new image.
- 7. (Optional) To preview the image, press Preview, and then press Back.
- Press Select.
- 9. Press Save.

Adjusting the expansion module brightness

Procedure

- 1. On the phone, press Main Menu.
- 2. Scroll to **Settings** and press **Select**.
- 3. Scroll to **Display** and press **Select**.
- 4. Scroll to **Brightness**, and press **Select**.
- 5. Scroll to Module.
- 6. **(Optional)** If there are more than one Avaya J100 Expansion Module attached, select the module by the module number.
- 7. Press one of the following:
 - Right arrow key: To increase the brightness.
 - Left arrow key: To decrease the brightness.

Setting the text size

- 1. Press Main Menu.
- 2. Scroll to **Settings** and press **Select**.
- 3. Scroll to **Display** and press **Select**.
- 4. Scroll down to **Text size** and press **Select**.
- 5. Scroll down to **Primary display** and press **Select**.
- 6. Press one of the following:
 - Right arrow key: To increase the font size.
 - Left arrow key: To decrease the font size.
- 7. **(Optional)** To restore the default font size, press **Default**.
- 8. Press Save.

Customizing keys

Adding a labeled key

About this task

Use this procedure to add a labeled key to an empty line for a quick access to the contact, feature or application.

Before you begin

Ensure the Contacts list is not empty before adding a key labeled with the contact. See "Adding a new contact" section in the user guide of your phone model.

Procedure

- 1. Press Main Menu.
- Scroll to Settings and press Select.
- 3. Scroll to **Phone** and press **Select**.
- 4. Scroll to Phone keys customization and press Select.
- 5. Scroll to **Customize key** and press **Select**.
- 6. To select an empty line, use Navigation keys.
- 7. Press **Add** and select one of the following:
 - Contact
 - Feature
 - App
- 8. In the new screen, scroll to the contact, feature or application you want to add and press **Select**.

Relabeling a key

About this task

Avaya J100 Expansion Module labels are preset by the system administrator. You can change these labels as required.

The first 24 keys are to customize the phone display screen. Keys 25 — 48 are to customize active page 1 of the button module. Keys 49 — 72 are to customize active page 2. Keys 73 — 96 are to customize active page 3.

- 1. Press Main Menu.
- 2. Scroll to **Settings** and press **Select**.
- 3. Scroll to **Phone** and press **Select**.

- 4. Scroll to Phone keys customization and press Select.
- 5. Scroll to Customize key and press Select.
- 6. To select the required button key, use **Navigation** keys.

When you scroll down using **Navigation** keys, the expansion module display highlights the key area.

- 7. To relabel a key, do the following:
 - a. Press Relabel.
 - b. Type the name of the label and press **Save**.

Moving a key

Procedure

- 1. Press Main Menu.
- Scroll to Settings and press Select.
- 3. Scroll to Phone and press Select.
- 4. Scroll to **Phone keys customization** and press **Select**.
- 5. Scroll to Customize key and press Select.
- 6. To select the button key you want to move, use **Navigation**.
- 7. To move the selected key, do the following:
 - a. Press Move.
 - b. Use the Navigation keys to move the selected line key.
 - c. If the new location is empty, press **Select**.
 - d. If the new location is already assigned with a key, press **Swap**.

Deleting a key

- 1. Press Main Menu.
- 2. Scroll to **Settings** and press **Select**.
- 3. Scroll to Phone and press Select.
- 4. Scroll to Phone keys customization, and press Select.
- 5. Scroll to Customize key and press Select.
- 6. Scroll to the button key you want to delete and press **Delete**.
- 7. In the confirmation window, press **Delete**.

Restoring customized keys to default

About this task

Use this procedure to restore the customized keys to administrator settings. The phone clears all your favorites, including Contact, Feature, and App favorites, and applies administrator settings. The procedure does not affect your customized labels.

Before you begin

Ensure that the administrator sets the customization mode as Full.

- 1. Press Main Menu.
- 2. Scroll to **Settings** and press **Select**.
- 3. Scroll to **Phone** and press **Select**.
- 4. Scroll to **Phone keys customization** and press **Select**.
- 5. Scroll to **Restore** and press **Select**.
- 6. In the confirmation window, press **Restore**.

Chapter 5: Troubleshooting

Viewing the expansion module details

Viewing the expansion module details from Administration menu

Before you begin

Obtain the access code from the system administrator to access Administration menu.

Procedure

- 1. On the phone, press Main Menu.
- 2. Scroll to Administration, and press Select.
- 3. Enter the access code provided by the system administrator.
- 4. Scroll to View, and press Select.
- 5. Scroll to **Button modules**, and press **Select**.

The phone displays the name, software version, and current status of the expansion module. The status can be **Connected**, **Disabled**, **Upgrading** or empty.

Viewing the expansion module details from Main menu

Procedure

- 1. On the phone, press Main Menu.
- 2. Scroll to **Network information**, and press **Select**.
- 3. Scroll to **System**, and press **Select**.
- 4. Scroll to **Button modules**, and press **Select**.

The phone displays the name, software version, and current status of the expansion module. The status can be **Connected**, **Disabled**, **Upgrading** or empty.

Common troubleshooting scenario

Condition

Either of the following is observed:

- Avaya J100 Expansion Module display screen is dark.
- · The expansion module lines are not displayed.
- The action on Avaya J100 Expansion Module does not cause the corresponding result on the phone.
- The action on the phone does not cause the corresponding result on Avaya J100 Expansion Module.
- After the upgrade or downgrade is completed, the connection to Avaya J100 Expansion Module is lost.

Solution

- 1. Check if the phone has the power supply.
- 2. Check if Avaya J100 Expansion Module is attached to the phone correctly and the connection cable is not damaged.
- 3. Reboot the phone. The expansion module will reboot automatically.
- 4. Plug Avaya J100 Expansion Module connection cable out and in.

Chapter 6: Resources

Finding documents on the Avaya Support website

Procedure

- 1. Go to https://support.avaya.com.
- 2. To log in, click **Sign In** at the top of the screen and then enter your login credentials when prompted.
- 3. Click Product Support > Documents.
- 4. In **Search Product**, start typing the product name and then select the appropriate product from the list displayed.
- 5. In **Select Release**, select the appropriate release number.

This field is not available if there is only one release for the product.

- 6. (Optional) In Enter Keyword, type keywords for your search.
- 7. From the **Select Content Type** list, select one or more content types.

For example, if you only want to see user guides, click **User Guides** in the **Select Content Type** list.

8. Click \(\text{\text{o}} \) to display the search results.

Avaya Documentation Center navigation

For many programs, the latest customer documentation is available on the Avaya Documentation Center website at https://documentation.avaya.com. Some functionality is only available when you log in to the Avaya Documentation Center. The available functionality depends on your role.

Important:

If the documentation you are looking for is not available on the Avaya Documentation Center, you can find it on the Avaya Support website.

While navigating through the Documentation Center, you can click the **Avaya Documentation Center** logo at the top of the screen to return to the home page anytime. On the Avaya Documentation Center, you can do the following:

- Click Avaya Links in the top menu bar to access other Avaya websites, including the Avaya Support website.
- Click **Languages** (() in the top menu bar to change the display language and view localized documents.
- In the **Search Documentation** field, search for keywords and click **Filter** to filter by solution category, product, or user role.

You can select multiple items in each filter category. For example, you can select a product and multiple user roles.

- Click **Library** in the top menu bar to access the complete library of documents. Use the filtering options to refine your results.
- After performing a search or accessing the library, you can sort content on the search results page. When you find the item you want to view, click it to open it.
- Use the table of contents in a document for navigation. You can also click < or > next to the document title to navigate to the previous topic or the next topic.
- Click Share (→) to share a topic by email or copy the URL.
- Download a PDF of the current topic in a document, the topic and its subtopics, or the entire document.
- Print the section you are viewing.
- Add content to a collection by clicking **Add to My Topics** (). You can add the topic and its subtopics or add the entire publication.
- View the topics in your collections. To access your collections, click your name in the top menu bar and then click **My Topics**.

You can do the following:

- Create, rename, and delete a collection.
- Set a collection as the default or favorite collection.
- Save a PDF of the selected content in a collection and download it to your computer.
- Share content in a collection with others through email.
- Receive collections that others have shared with you.
- Click **Watch** (③) to add a topic to your watchlist so you are notified when the content is updated or removed.
- View and manage your watchlist by clicking **Watchlist** from the top menu with your name.

You can do the following:

- Enable **Email notifications** to receive email alerts.
- Unwatch the selected content or all topics.
- · Send feedback for a topic.

Viewing Avaya Mentor videos

Avaya Mentor videos provide technical content on how to install, configure, and troubleshoot Avaya products.

About this task

Videos are available on the Avaya Support website, listed under the video document type, and on the Avaya-run channel on YouTube.

- To find videos on the Avaya Support website, go to https://support.avaya.com/ and do one of the following:
 - In Search, type Avaya Mentor Videos, click Clear All and select Video in the Select Content Type.
 - In **Search**, type the product name. On the Search Results page, click **Clear All** and select **Video** in the **Select Content Type**.

The **Video** content type is displayed only when videos are available for that product.

In the right pane, the page displays a list of available videos.

- To find the Avaya Mentor videos on YouTube, go to www.youtube.com/AvayaMentor and do one of the following:
 - Enter a keyword or keywords in the Search Channel to search for a specific product or topic.
 - Scroll down Playlists, and click a topic name to see the list of videos available. For example, Contact Centers.



Note:

Videos are not available for all products.

Support

Go to the Avaya Support website at https://support.avaya.com for the most up-to-date documentation, product notices, and knowledge articles. You can also search for release notes, downloads, and resolutions to issues. Use the online service request system to create a service

Resources

request. Chat with live agents to get answers to questions, or request an agent to connect you to a support team if an issue requires additional expertise.

Index

A		display settings	10
accessing applications	15	setting text size	
accessing applicationsaccessing features		document changesdocumentation center	
answering a call		finding content	
answering a call when on another call		navigation	
applications overviewAvaya support website		documentation portal	<u>20</u>
		E	
В		expansion module	
background image		Administration menu	<mark>23</mark>
JEM24 display	17	icons	11, 12
black font		lines	12
display	17	Main menu	<mark>23</mark>
• •		overview	
•		physical layout	1 0
С		upgrade indication	
call operations			
answering a call		F	
answering a call when on another call			
making a call	<u>13</u>	finding content on documentation center	<u>25</u>
changing			
phone display	<u>17</u>	1	
collection		•	
delete		icons	<u>11</u>
edit			
generating PDF		1	
sharing content	<u>25</u>	L	
content		light mode	
publishing PDF output		setting	16 17
searching		55tting	<u>10</u> , <u>11</u>
sharing			
sort by last updated		M	
watching for updates	<u>25</u>	making a call	12
customizing keys		making a call	<u>13</u>
adding a key			
deleting a key		P	
moving a key			
relabeling a key	<u>20</u>	phone display	
		changing	
D		physical layout	<u>10</u>
dark mode		R	
setting	16	K	
details		restoring keys to default	
Administration menu	23	rectaining hojo to dollant	<u>22</u>
Main menu			
display customization		S	
overview	16		40
Display Mode		screen saver image	
setting	16	searching for content	<u>25</u>
	<u></u>	setting	

setting (continued)	
background image	<u>17</u>
Display Mode	16
settings	
customizing keys	<u>22</u>
screen saver image <u>18</u>	
sharing content	
sort documentssupport	
support	<u> 21</u>
т	
troubleshooting common steps	<u>24</u>
V	
videos	<u>27</u>
W	
watchlist	<u>25</u>