



Virtual Services Platform 7000 Series

VSP 7000 Hardware Ordering Checklist

Do you have the hardware you need?

Each switch is shipped with two fan trays and can support up to two power supplies.

Important: Power supply and fan tray direction must match. For example, if you require front to back cooling, you must ensure that the switch and power supply is designated for front to back cooling.

For...	Order	Order Code	Quantity
Front-to-Back cooling	✓ VSP 7024XLS 24 SFP+ Base Unit, SW, and documentation, includes two fan trays, standard rack mount kits (19in & 23in)	AL700001F-E6	1
	✓ VSP 7000 AC Power Supply Front2Back Cooling (No Power Cord*)	AL7000A0F-E6	1 or 2**†
	✓ VSP 7024XT 24 10GTX Front2Back Cooling Base Unit & SW (No PSU) Note: includes base license, fan tray & 19/23" rack mount	AL7000S2F-E6	1
Back-to-Front cooling	✓ VSP 7024 XLS 24 SFP+ Base Unit, SW, and documentation, includes two fan trays, standard rack mount kits (19in& 23in)	AL700001B-E6	1
	✓ VSP 7000 AC Power Supply Back2Front Cooling (No Power Cord*)	AL7000A0B-E6	1 or 2**†
	✓ VSP 7024XT 24 10GTX Back2Front Cooling Cooling Base Unit & SW (No PSU) Note: includes base license, fan tray& 19/23" rack mount	AL7000S2B-E6	1
4-post mounting bracket ‡	✓ VSP 7000 Four Post Server Rack Mount Kit (optional)	AL5911001-E6	1
Console cabling	✓ AVAYA RJ-45/DB-9 Integrated Console Cable Note: 1.5m cable with DB-9 Female for PC and RJ-45 for device console port.	AL2011022-E6	1

Be sure to order Direct Attach cables and SFP, SFP+, or QSFP+ Transceivers as required. See Installing Transceivers and Optical Components on Avaya Virtual Services Platform 7000 Series (NN47202-302) for more information.

* F2B power supply and power cord variants:
AL7000B0F-E6 = Europe, AL7000C0F-E6 = UK,
AL7000D0F-E6 = Japan, AL7000E0F-E6 = North American,
AL7000F0F-E6 = Australia/New Zealand

B2F power supply and power cord variants:
AL7000B0B-E6 = Europe, AL7000C0B-E6 = UK,
AL7000D0B-E6 = Japan, AL7000E0B-E6 = North American,
AL7000F0B-E6 = Australia/New Zealand

** Avaya recommends two power supplies for redundancy, load sharing and full hot-swap replacement of a power supply for uninterruptible operation


† The VSP 7000 switch supports the following power supply configurations: one AC power supply; one DC power supply; two AC power supplies; two DC power supplies; or one AC power supply and one DC power supply.

‡ Due to the weight of the VSP 7000 switch, a four post rack mount is recommended.

Installing the VSP 7000 Series


1 Unpack Equipment

Unpack the Virtual Services Platform 7000.

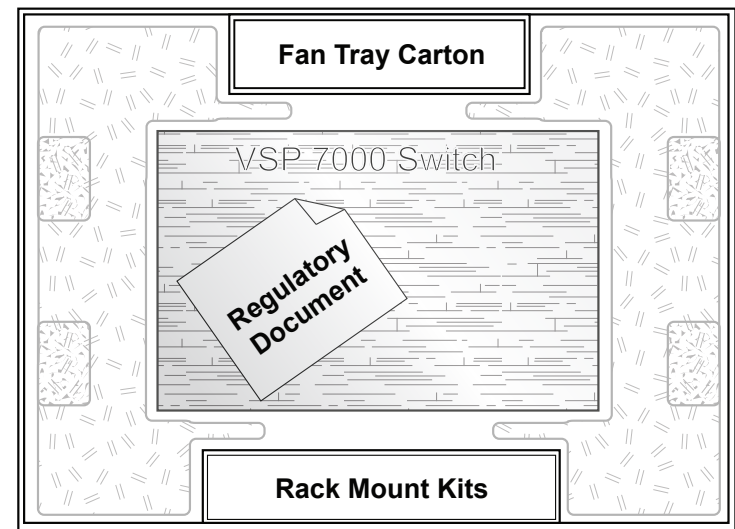

Observe ESD precautions when unpacking.

The switch ships with a filler panel in the second power supply position. This filler panel should stay in place if you do not intend to install a second power supply

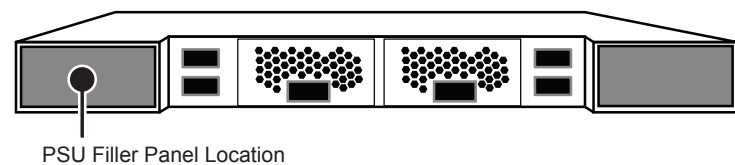


2 Install the VSP 7000 switch in a rack

To install using the standard 19" or 23" rack mount brackets included with the switch:


1. Using the mounting brackets included with the switch (not shown), attach a bracket to the front of each side of the switch with the included screws.
2. Fasten the switch to the equipment rack with rack mount screws.

To install using the optional 4-port rack mount bracket:

1. Attach a front bracket to each guide bracket with four 8.0 mm length flat head machine screws.
2. Attach the guide brackets to the switch chassis, using four M4 x 5.5 mm undercut flat-head hex machine screws to attach the rear of each guide bracket to the switch chassis. Verify that the rear screws seat flush in the guide brackets.
3. Install the switch into the equipment rack, temporarily using only the front rack mounts and screws.
4. Attach the rear mounting brackets and secure the switch to the rear rack posts. Slide a rear mounting bracket into each guide bracket channel until flush with the rear rack posts. Secure the rear mounting brackets to the switch chassis with the pan-head screws.

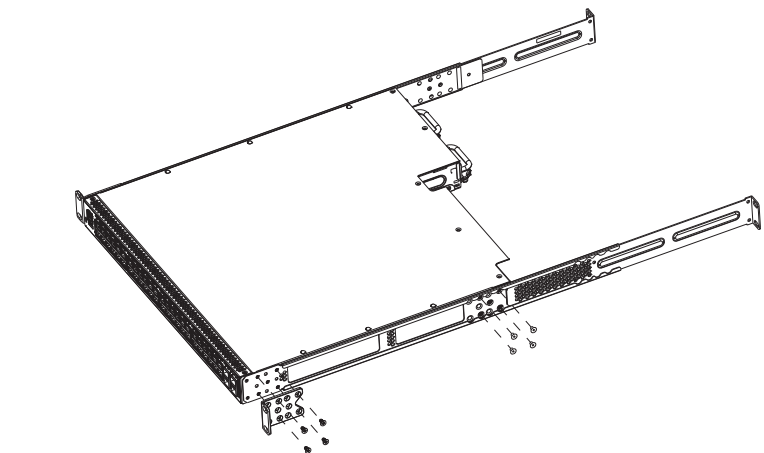

3 Install two Fan Trays in the VSP 7000 switch

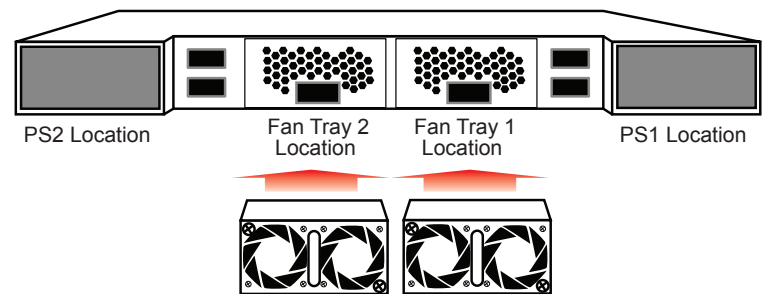


4 Install Power Supply(s)

The first power supply should be installed in the PS1 location (see step 3). The power supply is location independent; you can install an AC or DC power supply into either power supply slot in the switch.


The airflow direction of the power supply in PS1 determines the primary airflow direction for the switch. If PS1 is not present, PS2 determines the airflow direction. If any power supply location is unpopulated, a PSU Filler Panel must be installed.

1. Insert the first power supply into the rear PS1 power supply slot. If a blanking plate covers the required power supply slot, remove the plate before inserting the power supply. A small angle on the top corner of the power supply ensures that the power supply can only be installed in one orientation in the switch.
2. Verify that the power supply is fully seated in the slot and securely clipped in place.
3. Optional: Install the second power supply into the rear PS2 power supply slot. The airflow direction must match the primary Power Supply. The switch ships with a filler panel in PS2 position. Leave the filler panel in place if you do not intend on installing a second power supply.

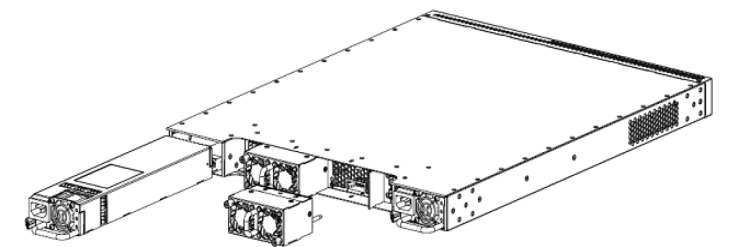

5 Connect AC power to the VSP 7000 switch

Connect AC power cord(s) to the back of the switch, and then plug the other end of the cord into an AC power outlet.

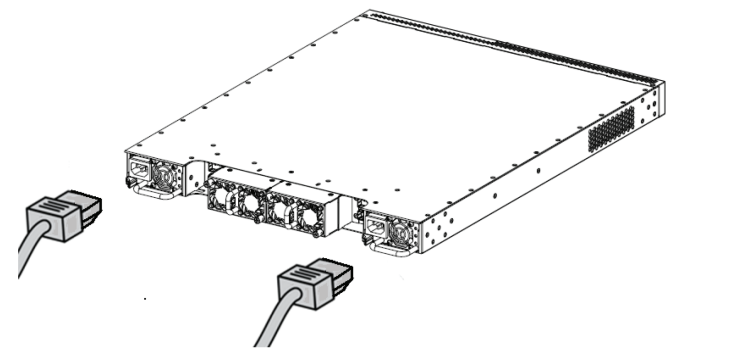

The switch will power on immediately once connected to a suitable AC power source. The switch does not have a power switch. Refer to *Installing Avaya Virtual Services Platform 7000 Series* (NN47202-300) for instructions on connecting DC power connections.

The VSP 7000 boot sequence is shown below

```
7024XLS Boot-Loader 10.1.0.6
Testing main memory                               -PASSED
Serial Number: 11JP246V1004
Mac Address: 3C-B1-5B-FE-F4-00
Resets: 55

Starting Diagnostic Code Vers: 10.1.0.6
(to interrupt Diagnostics, type control-C and wait..)
7024XLS Diagnostics 10.1.0.6
Test 101 Flash IO Read -PASSED
Test 121 System SROM Labels -PASSED
Test 127 CBM SROM Labels -PASSED
Test 131 DTS Temperatures -PASSED
Test 141 RTC Clock -PASSED
Test 151 FANs Status -PASSED
Test 161 Power Supplies -PASSED
Test 171 POLS Status -PASSED
Test 173 RDACS Registers -PASSED
Trst 175 PPACS Status -PASSED
Test 211 TSEC Internal Loopback -PASSED
Test 271 Ports Internal Loopback -PASSED

Starting [ Agent-1 ] Vers: 10.2.0.000
Decompressing the image done.
Initilizing.....
Broadcom Command Monitor:
Copyright (c)1998-2010 Broadcom Corporation
Completing initialization...
```

Check LED status of the power supplies and fans. Status LEDs are on the front left side of the switch. For information on all status LEDs, see Avaya VSP 7000 Series Installation (NN47202-300).

Your Setup	
All setups	Status LED (Blinks) Green until agent software is loaded, then goes (Solid) Green
Two Power supplies	Power Supply 1 (PS1) and Power Supply 2 (PS2) Green (Solid)
Front-to-Back fans	Fan Tray 1 (FA1) and Fan Tray 2 (FA2) Blue (Solid)
One power supply	PS1 - Green (Solid) PSU2 - Not lit
Back-to-Front fans	FA1 and FA2 Amethyst (Solid)

Base

Up

PS1

FA1

Status

Down

PS2

FA2

Base

Up

PS1

FA1

Status


Down

PS2

FA2

Commissioning the VSP 7000

1 Connect the console cable to the VSP 7000

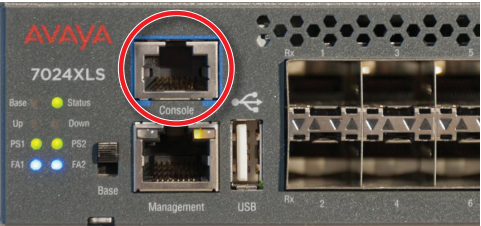

The Console port is the RJ-45 port shown with a blue border outline on the front left side of the VSP 7000 switch. Use the console cable (AL2011022-E6) to connect the switch console port to your management terminal. The maximum length of the console cable is 25 feet (8.3 meters). The following table describes the RJ-45 console port pin-out information. You can use the pin-out information to verify or create a console cable for use with your maintenance terminal.

RJ-45 Jack	Name	Requirement	RJ-45 8-Pin Female Jack
1	RTS (ready to send)	Optional (can be swapped with pin 8)	
2	DTR (data terminal ready)	Optional	
3	TXD (transmit data)	Mandatory	
4	DCD (carrier detect)	Optional	
5	GND (ground)	Mandatory	
6	RXD (receive data)	Mandatory	
7	DSR (data set ready)	Optional	
8	CTS (clear to send)	Optional (can be swapped with pin 1)	

- 1.Connect the console cable from the terminal to the console port of the switch to allow initial configuration. Any terminal or PC with the appropriate terminal emulator can be used as the management station. The table below lists the parameters that must be used with any terminal emulation software used to connect to the switch.
- 2.Set the terminal protocol on the terminal or terminal emulation program to VT100 or VT100/ANSI.
- 3.Connect to the switch using the terminal or terminal emulation application.
- 4.Enter <CTRL-Y> to obtain a prompt.

Terminal emulation settings

Property	Value
Baud Rate	9600 bps
Data Bits	8
Stop Bits	1
Parity	None
Flow Control	None

Using Avaya Command Line Interface (ACLI)

Command Mode	Description	Entrance commands	Exit commands
User Executive (Exec mode) 7024XLS> Tip: You can tell you are in Exec mode if the prompt ends with >	• Default mode and Initial access mode • Requires only Read access • Used for basic commands such as show, ping, and logoff	Default mode – no entrance command	exit or logoff
Privileged Executive (PrivExec mode) 7024XLS # Tip: You can tell you are in PrivExec mode if the prompt ends with #	• Used for basic switch level management tasks; e.g., downloading software images, setting passwords, starting the switch • Requires Read-Write access	enable or ena	exit or logoff
Global Configuration (Config mode) 7024XLS (config) #	• Used to set and display general switch parameters such as IP address, SNMP parameters, Telnet access and VLANs • Requires Read-Write access	From PrivExec mode, enter configure or config	To return to PrivExec mode, enter end or exit. To exit ACLI completely, enter logout.
Interface Configuration (ifconfig mode) 7024XLS (config-if) #	• Used to configure parameters for each port or VLAN such as speed, duplex mode, and rate limiting • Requires Read-Write access	From Config mode: To configure a port enter interface ethernet <port number> To configure a VLAN, enter interface vlan <vlan number>	To return to Config mode, enter exit. To return to PrivEXEC mode, enter end. To exit ACLI completely, enter logout

For more information on additional modes, see Using ACLI and EDM on Avaya Virtual Services Platform 7000 Series (NN47202-101).

2 Configure the Management IP Address

There are three methods to configure the management IP address:

- 1.When you first log on if the switch is still in the factory default mode, it will automatically run the install script, which prompts for IP configuration information.
- 2.If the switch is connected to a network, it can obtain an IP address via bootp or DHCP (not shown).
- 3.Alternatively, you can manually run the installation script from Privileged EXEC mode with the following ACLI command: `install`

Install Script

When prompted, enter the management IP address, sub-net mask, and default gateway (shown in bold below).

```
#####
Welcome to the VSP7000 setup utility.
You will be requested to provide the switch basic connectivity
settings. After entering the requested info, the configuration will be
applied and stored into the switch NVRAM.

Once the basic connectivity settings are applied, additional
configuration can be done using the available management interfaces.
Use Ctrl+C to abort the configuration at any time.
#####
Please provide the Quick Start VLAN <1-4094> [1]:
Please provide the in-band IP Address[192.0.2.1]:
Please provide the in-band sub-net mask[255.255.255.0]:
Please provide the Default Gateway[192.0.2.0]:
Please provide the management IP Address[0.0.0.0]:
Please provide the management sub-net mask[0.0.0.0]:
Please provide the management Default Gateway[0.0.0.0]:
Please provide the Read-Only Community String[*****]:
Please provide the Read-Write Community String[*****]:
Please provide the in-band IPV6 Address/Prefix_length[::/0]:
Please provide the in-band IPV6 Default Gateway[:]:
#####
Basic stack parameters have now been configured and saved.
#####
```

Manual Configuration

You can manually configure the in-band management IP address at any time with the following ACLI command:
`ip address <A.B.C.D> [netmask <A.B.C.D>]
[default-gateway <A.B.C.D>]`

Example

```
1. Enter PrivExec mode:
7024XLS>enable

2. Enter the Global Config mode:
7024XLS#config terminal

3. Manually configure in-band management IP information
7024XLS(config)# ip address 192.0.2.1 netmask 255.255.255.0
default-gateway 192.0.2.0

4. Verify the information
7024XLS(config)#show ip
Bootp/DHCP Mode: BootP When Needed

Bootp/DHCP          Configured      In Use          Last
-----
Stack IP Address:    0.0.0.0         0.0.0.0
Switch IP Address:   192.0.2.1       192.0.2.1      0.0.0.0
Switch Subnet Mask:  255.255.255.0  255.255.255.0  0.0.0.0
Mgmt Stack IP Address: 0.0.0.0
Mgmt Switch IP Address: 0.0.0.0
Mgmt Subnet Mask:    0.0.0.0
Mgmt Def Gateway:    0.0.0.0
Default Gateway:     192.0.2.0      192.0.2.0      0.0.0.0
```

ACLI boot and factory-default commands:

`boot` - reboot the switch
`boot default` - reboot and use the factory default configuration
`boot partial-default` - reboot and use the partial factory default configuration
`restore factory-default` - reset the switch to factory default configuration

Recommended reading

For more information, go to <http://support.avaya.com> and download the following VSP 7000 guides:

- Locating Documentation and Regulatory Reference (NN47202-102)
- Documentation Roadmap Reference (NN47202-103)
- Installing (NN47202-300)
- Getting Started (NN47202-303)
- Release Notes (NN47202-400)

1-800-242-2121 (U.S.A.)

1-866 GO-AVAYA

1-866-462-8292 (US Sales)

© 2013 Avaya Inc.

Poster part number: 700506073

NN47202-304, 05.01

© 2016 Avaya Inc. All Rights Reserved

<http://support.avaya.com>