


Authorization Sample Bundle

Introduction

The Authorization sample bundle service demonstrates packaging one or more snap-in(s) in a single svar artifact. The Authorization sample bundle packages the Authorization sample services - TaskRepository and TaskDashboard service.

Structure of the sample bundle is per below:

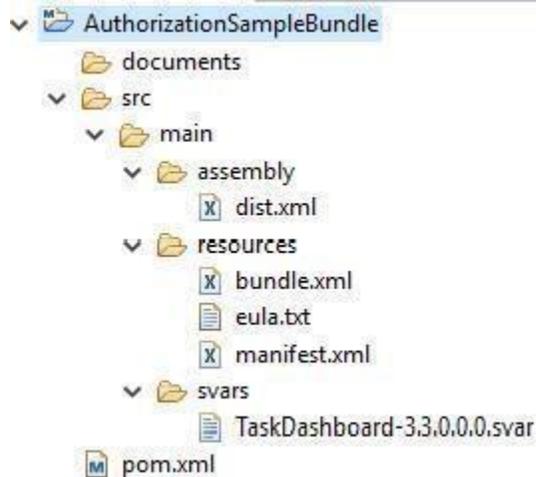

The bundle.xml defines all the services which will be packaged in authorization sample bundle.

The svars folder contains the service archives which are packaged in this sample bundle e.g. For Avaya Breeze® platform release 3.3.0.0.0 - TaskDashboard-3.3.0.0.0.svar and TaskRepository-3.3.0.0.0.svar.

Authorization sample bundle creation

Once Authorization Sample bundle build completed, bundle.xml will be look below – e.g. For Avaya Breeze release 3.3.0.0.0

```
<?xml version="1.0" encoding="UTF-8"?>
<p:bundle name="AuthorizationSampleBundle" version="3.3.0.0.0"
  xmlns:p="http://archiveschemas.aus.avaya.com/bundle"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://archiveschemas.aus.avaya.com/bundle bundle.xsd ">
  <p:services>
    <p:service name="TaskDashboard" version="3.3.0.0.0" svarFileName="TaskDashboard-3.3.0.0.0.svar">
    </p:service>
    <p:service name="TaskRepository" version="3.3.0.0.0" svarFileName="TaskRepository-3.3.0.0.0.svar">
    </p:service>
  </p:services>
</p:bundle>
```

Procedure to use

The AuthorizationSampleBundle is packaged in the Avaya Breeze SDK.

It can be built using maven tools in Eclipse / using command line.

Use the Home > Avaya Breeze® > Service Management > Bundles page to upload and try out Bundle operations on 3.3 or above Avaya Breeze cluster.