



Intelligent Customer Routing Overview and Specification

Release 7.0.1
Issue 1.1
February 2016

© 2013-2016, Avaya, Inc.
All Rights Reserved.

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Documentation disclaimer

"Documentation" means information published by Avaya in varying mediums which may include product information, operating instructions and performance specifications that Avaya may generally make available to users of its products and Hosted Services. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of documentation unless such modifications, additions, or deletions were performed by Avaya. End User agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on Avaya hardware and software. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language, as well as information regarding support for this product while under warranty is available to Avaya customers and other parties through the Avaya Support website: <https://support.avaya.com/helpcenter/getGenericDetails?detailId=C20091120112456651010> under the link "Warranty & Product Lifecycle" or such successor site as designated by Avaya. Please note that if You acquired the product(s) from an authorized Avaya Channel Partner outside of the United States and Canada, the warranty is provided to You by said Avaya Channel Partner and not by Avaya.

Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/LicenseInfo), UNDER THE LINK "AVAYA SOFTWARE LICENSE TERMS (Avaya Products)" OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM AVAYA INC., ANY AVAYA AFFILIATE, OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AVAYA CHANNEL PARTNER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA CHANNEL PARTNER; AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE ("AVAYA").

Avaya grants You a license within the scope of the license types described below, with the exception of Heritage Nortel Software, for

which the scope of the license is detailed below. Where the order documentation does not expressly identify a license type, the applicable license will be a Designated System License. The applicable number of licenses and units of capacity for which the license is granted will be one (1), unless a different number of licenses or units of capacity is specified in the documentation or other materials available to You. "Software" means computer programs in object code, provided by Avaya or an Avaya Channel Partner, whether as stand-alone products, pre-installed on hardware products, and any upgrades, updates, patches, bug fixes, or modified versions thereto. "Designated Processor" means a single stand-alone computing device. "Server" means a Designated Processor that hosts a software application to be accessed by multiple users. "Instance" means a single copy of the Software executing at a particular time: (i) on one physical machine; or (ii) on one deployed software virtual machine ("VM") or similar deployment.

License type(s)

Designated System(s) License (DS). End User may install and use each copy or an Instance of the Software only on a number of Designated Processors up to the number indicated in the order. Avaya may require the Designated Processor(s) to be identified in the order by type, serial number, feature key, Instance, location or other specific designation, or to be provided by End User to Avaya through electronic means established by Avaya specifically for this purpose.

Concurrent User License (CU). End User may install and use the Software on multiple Designated Processors or one or more Servers, so long as only the licensed number of Units are accessing and using the Software at any given time. A "Unit" means the unit on which Avaya, at its sole discretion, bases the pricing of its licenses and can be, without limitation, an agent, port or user, an e-mail or voice mail account in the name of a person or corporate function (e.g., webmaster or helpdesk), or a directory entry in the administrative database utilized by the Software that permits one user to interface with the Software. Units may be linked to a specific, identified Server or an Instance of the Software.

Database License (DL). End User may install and use each copy or an Instance of the Software on one Server or on multiple Servers provided that each of the Servers on which the Software is installed communicates with no more than one Instance of the same database.

CPU License (CP). End User may install and use each copy or Instance of the Software on a number of Servers up to the number indicated in the order provided that the performance capacity of the Server(s) does not exceed the performance capacity specified for the Software. End User may not re-install or operate the Software on Server(s) with a larger performance capacity without Avaya's prior consent and payment of an upgrade fee.

Named User License (NU). You may: (i) install and use each copy or Instance of the Software on a single Designated Processor or Server per authorized Named User (defined below); or (ii) install and use each copy or Instance of the Software on a Server so long as only authorized Named Users access and use the Software. "Named User", means a user or device that has been expressly authorized by Avaya to access and use the Software. At Avaya's sole discretion, a "Named User" may be, without limitation, designated by name, corporate function (e.g., webmaster or helpdesk), an e-mail or voice mail account in the name of a person or corporate function, or a directory entry in the administrative database utilized by the Software that permits one user to interface with the Software.

Shrinkwrap License (SR). You may install and use the Software in accordance with the terms and conditions of the applicable license agreements, such as "shrinkwrap" or "clickthrough" license accompanying or applicable to the Software ("Shrinkwrap License").

Heritage Nortel Software

"Heritage Nortel Software" means the software that was acquired by Avaya as part of its purchase of the Nortel Enterprise Solutions Business in December 2009. The Heritage Nortel Software is the software contained within the list of Heritage Nortel Products located at <https://support.avaya.com/LicenseInfo> under the link "Heritage Nortel Products" or such successor site as designated by Avaya. For Heritage Nortel Software, Avaya grants Customer a license to use Heritage Nortel Software provided hereunder solely to the extent of the authorized activation or authorized usage level, solely for the

purpose specified in the Documentation, and solely as embedded in, for execution on, or for communication with Avaya equipment. Charges for Heritage Nortel Software may be based on extent of activation or use authorized as specified in an order or invoice.

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, Hosted Service, or hardware provided by Avaya. All content on this site, the documentation, Hosted Service, and the product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, and or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Third Party Components

“Third Party Components” mean certain software programs or portions thereof included in the Software or Hosted Service may contain software (including open source software) distributed under third party agreements (“Third Party Components”), which contain terms regarding the rights to use certain portions of the Software (“Third Party Terms”). As required, information regarding distributed Linux OS source code (for those products that have distributed Linux OS source code) and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply is available in the products, Documentation or on Avaya’s website at: <https://support.avaya.com/Copyright> or such successor site as designated by Avaya. The open source software license terms provided as Third Party Terms are consistent with the license rights granted in these Software License Terms, and may contain additional rights benefiting You, such as modification and distribution of the open source software. The Third Party Terms shall take precedence over these Software License Terms, solely with respect to the applicable Third Party Components to the extent that these Software License Terms impose greater restrictions on You than the applicable Third Party Terms.

Preventing Toll Fraud

“Toll Fraud” is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If You suspect that You are being victimized by Toll Fraud and You need technical assistance or support, call Technical Service Center Toll Fraud Intervention Hotline at +1-800-643-2353 for the United States and Canada. For additional support telephone numbers, see the Avaya Support website: <https://support.avaya.com> or such successor site as designated by Avaya.

Downloading Documentation

For the most current versions of Documentation, see the Avaya Support website: <https://support.avaya.com>, or such successor site as designated by Avaya.

Contact Avaya Support

See the Avaya Support website: <https://support.avaya.com> for product or Hosted Service notices and articles, or to report a problem with your Avaya product or Hosted Service. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: <https://support.avaya.com> (or such successor site as designated by Avaya), scroll to the bottom of the page, and select Contact Avaya Support.

Trademarks

The trademarks, logos and service marks (“Marks”) displayed in this site, the Documentation, Hosted Service(s), and product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its

affiliates, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the Documentation, Hosted Service(s) and product(s) should be construed as granting, by implication, estoppel, or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party.

Avaya is a registered trademark of Avaya Inc.

All non-Avaya trademarks are the property of their respective owners. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Contents

Chapter 1: Introduction	6
Purpose.....	6
Intended audience.....	6
Document changes since last issue.....	6
Related resources.....	6
Documentation.....	6
Training.....	9
Viewing Avaya Mentor videos.....	10
Support.....	11
Warranty.....	11
Chapter 2: Intelligent Customer Routing overview	12
New in this release.....	13
Feature description.....	13
ICR SDK.....	14
Additional fields and methods in ICR PDC.....	14
ICR Connector for third party or custom applications.....	14
ICR Configuration Web Services.....	15
Termination reason for wait treatment application.....	15
Support for SHA-2 Certificate.....	15
ICR CCA properties configurable at runtime.....	15
Zoning support.....	15
Consultation transfer from Self Service Application.....	16
Preferred and failover ICR Core.....	16
Sending real time EWT and queue position values to a running WTA.....	17
CMS rt_socket routing.....	17
Support SIP endpoints.....	17
Load balancing across SIP proxy servers.....	18
Dynamically reducing the cache freshness interval in an agent surplus situation.....	18
Opt-out from WTA.....	18
Call routing enhancement.....	18
Self Service First using Avaya Aura [®] Experience Portal.....	19
Intelligent Routing.....	19
Enhanced or advanced wait treatment.....	19
Reporting.....	19
ICR Pluggable Data Connector (PDC).....	20
Sample Applications.....	20
Avaya Aura [®] Experience Portal integration.....	20
Feature comparison.....	21
Chapter 3: Interoperability	22

Product compatibility.....	22
Operating system compatibility.....	23
Browser compatibility.....	23
Chapter 4: Performance specifications.....	24
ICR running on a physical system.....	24
Configuration of the physical system used for testing.....	24
Capacity and scalability specification for Get Destination method.....	25
Capacity and scalability specification for Get All Destination and Invoke Extension method.....	25
ICR running in a virtualized environment.....	26
Configuration of the virtualized environment used for testing.....	26
Capacity and scalability specification.....	27
Chapter 5: Environmental requirements.....	28
Chapter 6: Security.....	29
Security specification.....	29
Ports utilization.....	29
Chapter 7: Licensing requirements.....	30
Glossary.....	31

Chapter 1: Introduction

Purpose

This document describes tested product characteristics and capabilities, including feature descriptions, interoperability, performance specifications, security, and licensing requirements.

Intended audience

This document is intended for people who want to gain a high-level understanding of the product features, functions, capacities, and limitations.

Document changes since last issue

The following changes have been made to this document since the last issue:

- Updated the CPU information for the virtualized environment.

Related resources

Documentation

The following table lists the documents related to Intelligent Customer Routing. Download the documents from the Avaya Support website at <http://support.avaya.com>

Title	Description	Audience
Design		
Intelligent Customer Routing (ICR) Overview and Specification	This guide contains information on the concepts underlying Intelligent Customer	All

Table continues...

Title	Description	Audience
	<p>Routing. The guide also provides information about features, specifications, and the compatibility of Intelligent Customer Routing with other products.</p> <p>The specifications include information about performance, capacity, traffic, security, and licensing.</p>	
Implementation		
Implementing Intelligent Customer Routing (ICR)	<p>This guide provides the deployment scenarios, prerequisites, and procedures to install Intelligent Customer Routing on a single system or multiple systems.</p> <p>Topics include information about installing components of ICR and configuring Avaya Aura® Communication Manager, Avaya Aura® Session Manager, and Avaya Aura® Experience Portal for ICR. Also contains the information about configuring ICR properties, importing certificates, and uninstalling ICR.</p>	Planning Engineers Implementation Engineers Administrators
Maintenance and Troubleshooting		
Troubleshooting Intelligent Customer Routing (ICR)	<p>This guide provides the troubleshooting tips related to:</p> <ul style="list-style-type: none"> • ICR installation • ICR administration • ICR reporting • ICR components, such as Core and applications <p>This guide also contains the diagnostic procedures for collecting logs, setting the log levels, enabling the logging for ICR applications, and generating the new certificates that are expired.</p>	Administrators Service Engineers
Administration		
Administering Intelligent Customer Routing (ICR)	<p>This guide provides information about administering and managing ICR components, configuring ICR applications, monitoring real time and historical reports, managing licenses and certificates, troubleshooting errors, and identifying the events and alarms.</p>	Administrators

Table continues...

Title	Description	Audience
	This guide is available in the PDF format and also as an online help integrated with the application.	
Online Help for Intelligent Customer Routing (ICR)	<p>This is the online help integrated with the ICR application Web interface. This online help contains the procedures that you need to perform to configure ICR, troubleshoot the errors that occurs in ICR, and identify the events and alarms that ICR displays.</p> <p>When you click the help link on an application Web page, the application opens the corresponding help page in a browser window.</p>	Administrators
Developer		
<i>Intelligent Customer Routing Developer Guide</i>	This guide provides the information about developing applications using ICR Pluggable Data Connector (PDC), creating custom reports for ICR using the AAEP custom report, and sample applications that ICR provides.	Application Developers
<i>Intelligent Customer Routing SDK Programmer Guide</i>	This guide provides detailed information about the ICR Core SDK API's for Intelligent Customer Routing.	
<i>Intelligent Customer Routing Web services Reference Guide</i>	This guide provides information on the web services that provide the ability to retrieve, add, modify and delete ICR configurations. ICR configuration elements that are available include Skills, Destinations, Business Hours, Holidays, and Call Centers. Web services allow customers, integrators to configure and administer ICR configuration using third party tools and applications. It also allows integrators to develop tools for performing bulk operations such as adding ICR Skills and Destinations (VDNs).	
Related documents		
Implementing Avaya Aura [®] Experience Portal	This guide provides information about installing and configuring Avaya Aura [®] Experience Portal.	Implementation Engineers
Administering Avaya Aura [®] Experience Portal	This guide provides information about administering and managing Avaya Aura [®] Experience Portal.	Administrators
Avaya Aura [®] Orchestration Designer Developers Guide	This guide provides the detailed information and procedures for using Avaya Aura [®]	Implementation Engineers

Table continues...

Title	Description	Audience
	Orchestration Designer features and options to create speech, message, and call control applications.	ICR Application Developers

Finding documents on the Avaya Support website

About this task

Use this procedure to find product documentation on the Avaya Support website.

Procedure

1. Use a browser to navigate to the Avaya Support website at <http://support.avaya.com/>.
2. At the top of the screen, enter your username and password and click **Login**.
3. Put your cursor over **Support by Product**.
4. Click **Documents**.
5. In the **Enter your Product Here** search box, type the product name and then select the product from the drop-down list.
6. If there is more than one release, select the appropriate release number from the **Choose Release** drop-down list.
7. Use the **Content Type** filter on the left to select the type of document you are looking for, or click **Select All** to see a list of all available documents.

For example, if you are looking for user guides, select **User Guides** in the **Content Type** filter. Only documents in the selected category will appear in the list of documents.

8. Click **Enter**.

Training

The following courses are available on the Avaya Learning website at www.avaya-learning.com. After logging into the website, enter the course code or the course title in the **Search** field and click **Go** to search for the course.

Course code	Course title
5C00092I	Avaya Aura® Experience Portal, Avaya Aura® Orchestration Designer, and Avaya Proactive Outreach Manager Installation, Maintenance and Troubleshooting Essentials
5C00092V	Avaya Aura® Experience Portal, Avaya Aura® Orchestration Designer, and Avaya Proactive Outreach Manager Installation, Maintenance and Troubleshooting Essentials
5C00090V	Avaya Aura® Experience Portal , Avaya Aura® Orchestration Designer, and Avaya Proactive Outreach Manager Maintenance and Troubleshooting

Table continues...

Course code	Course title
5C00090I	Avaya Aura® Experience Portal , Avaya Aura® Orchestration Designer, and Avaya Proactive Outreach Manager Maintenance and Troubleshooting
4C00101W	Avaya Aura® Experience Portal Administration
4C00100V	Avaya Aura® Experience Portal Implementation
4C00100I	Avaya Aura® Experience Portal Implementation
2511W	Avaya Intelligent Customer Routing 7.0.1
2511A	Avaya Intelligent Customer Routing 7.0.1 Assessment
V: Instructor led virtual course	
I: Instructor led course	
W: Self-paced course	

Viewing Avaya Mentor videos

Avaya Mentor videos provide technical content on how to install, configure, and troubleshoot Avaya products.

About this task

Videos are available on the Avaya Support website, listed under the video document type, and on the Avaya-run channel on YouTube.

Procedure

- To find videos on the Avaya Support website, go to <http://support.avaya.com> and perform one of the following actions:
 - In **Search**, type `Avaya Mentor Videos` to see a list of the available videos.
 - In **Search**, type the product name. On the Search Results page, select **Video** in the **Content Type** column on the left.
- To find the Avaya Mentor videos on YouTube, go to www.youtube.com/AvayaMentor and perform one of the following actions:
 - Enter a key word or key words in the **Search Channel** to search for a specific product or topic.
 - Scroll down Playlists, and click the name of a topic to see the available list of videos posted on the website.

 **Note:**

Videos are not available for all products.

Support

Go to the Avaya Support website at <http://support.avaya.com> for the most up-to-date documentation, product notices, and knowledge articles. You can also search for release notes, downloads, and resolutions to issues. Use the online service request system to create a service request. Chat with live agents to get answers to questions, or request an agent to connect you to a support team if an issue requires additional expertise.

Warranty


Avaya provides a 90-day limited warranty on Intelligent Customer Routing. To understand the terms of the limited warranty, see the sales agreement or other applicable documentation.

In addition, Avaya's standard warranty description and details for support under warranty are available on the Avaya Support website at **Help & Policies > Policies & Legal > Warranty & Product Lifecycle**. Also see **Help & Policies > Policies & Legal > License Terms Lifecycle**.

Chapter 2: Intelligent Customer Routing overview

Intelligent Customer Routing (ICR) helps businesses to capitalize on the next competitive differentiator in the Customer Experience. ICR provides enhanced customer service by identifying and determining the caller intent through simple and intelligent customer conversations using speech and self service. ICR provides an opportunity for customers to serve themselves and, when needed, determines the most optimal route to provide live assistance to that end consumer leveraging resources enterprise wide. Avaya has unified self and assisted service into a single smart call routing solution that dynamically manages available media and IT resources while enabling a personalized high-value service from start to finish.

The following diagram gives a picture of how you can implement ICR in your system.

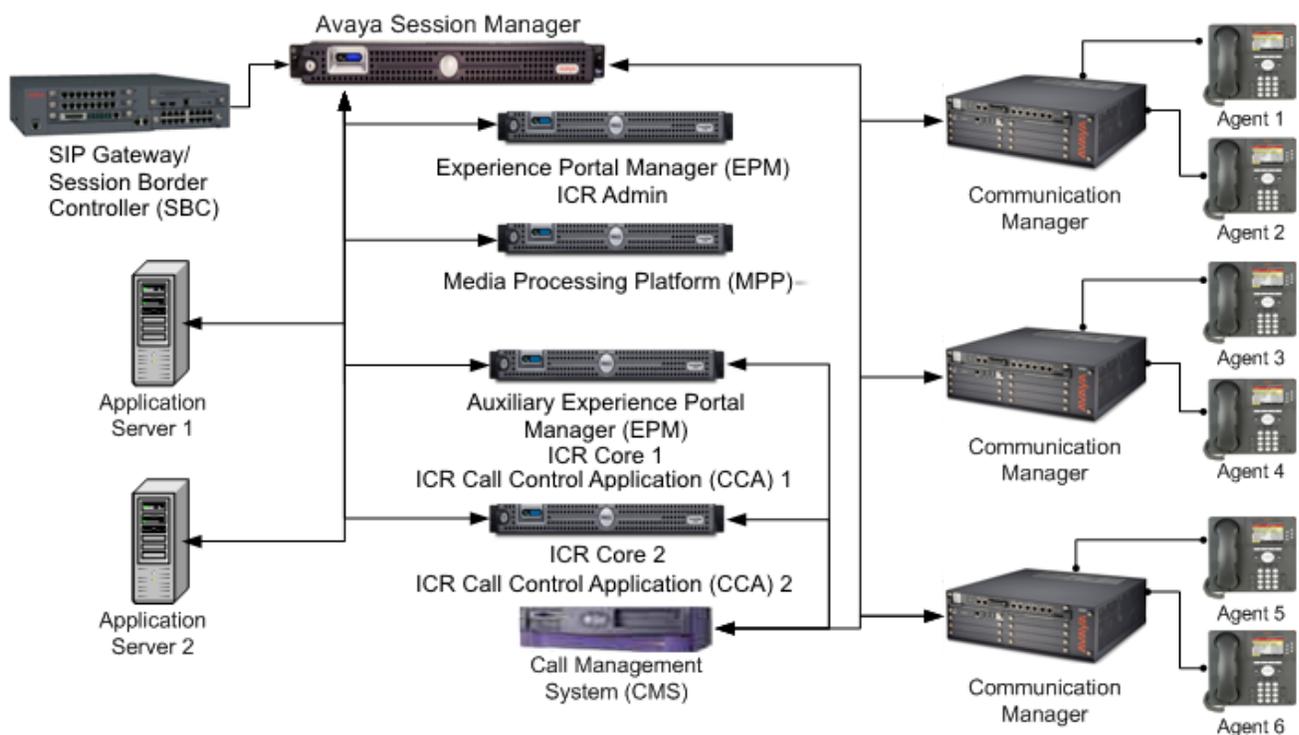

With ICR, Avaya begins the transition to the next generation contact centers by leveraging Avaya's next generation enterprise communication architecture, Avaya Aura®. This user centric architecture focuses on any-media, any-application, and any-device from the ground up. Earlier contact center solutions have used computer telephony integration (CTI) to collaborate different applications and

different protocols into complex solutions. These solutions were difficult to deploy, operate, and support. ICR removes the complexity, leveraging Session Initiation Protocol (SIP) for standards based integration and delivery of information or contact to any resource within or external to the enterprise.

When a call arrives, ICR can intelligently greet a customer based on business insights. While customers are waiting for live agents, Intelligent Customer Routing can present personalized up-sell or cross-sell messages, callback options, and even opt-in services to pro-actively notify customers of transaction status before the call even occupies resources on an ACD.

For example:

- Determine if a customer has talked to anyone in the past about their need and whether the customer wants to connect again for the same need.
- Gather more information about a caller based on a request; location of home purchase for which the caller needs a loan, existing loan number, and an order number.
- Offer an opportunity only to premium customers (and tell the customers that the opportunity is specific for them as highly valued customers) to pre-register for the service when the service becomes available.
- Ask customers about their experience with a previous purchase of a tool, a cell phone, a toaster, or a travel experience. Based on the customer feedback, respond to the customer.
- Refer customers to a local help desk that offers configuration and assistance free of charge. Send an email with a quick tips that customers can refer when installing and configuring a product.

New in this release

Intelligent Customer Routing (ICR) Release 7.0.1 supports the following new capabilities:

- ICRSoftware Development Kit (SDK) to extend routing with external routing functions
- Additional Fields and Methods in ICR Pluggable Data Connector (PDC)
- ICR connector for third party or custom application
- ICR Configuration Web Services
- Termination Reason for Wait Treatment application (WTA)
- Support for SHA-2 Certificate

Feature description

Intelligent Customer Routing (ICR) provides features to efficiently handle customer calls that arrives in an organization. In ICR, calls are either completely served through self-service applications or

intelligently routed to a relevant call center across applicable geographic locations based on the best available source of real-time data.

Use various features in ICR to provide the necessary self service and routing.

ICR SDK

ICR SDK provides ability to extend the routing capabilities of ICR by deploying custom routing module in ICR. The SDK provides set of APIs using which you can develop a routing module to meet specific business requirement. The API provides access to ICR Configuration, Call center metrics collected by doing BSR polling or from CMS-RT Socket and data collected in Self Service Application. The API also provides utility methods for logging and storing data into cache. The custom routing module is invoked from Self Service application using ICR PDC method called *Invoke Extension*.

Additional fields and methods in ICR PDC

ICR PDC is enhanced to provide six new fields in DestinationInformation variable. The fields are:

- agentAvailable
- agentStaffed
- ewtHigh
- ewtMedium
- ewtTop
- ewtLow

The following two methods are added:

- Get All Destination information
- Selected Destination

Application Developer can write logic in Self Service application to retrieve the destination information for all destinations in an ICR Skill and select a destination to route the call. These new fields and APIs are supported with CMS as data source for BSR information.

ICR Connector for third party or custom applications

ICR connector web application connects third party or custom applications with ICR Core. The connector is deployed on an application server and provides the REST API that third party or custom application can use to get routing information from ICR Core. The connector includes the following APIs:

- Get Destination

- Get All Destinations
- Selected Destination
- Invoke Extension

ICR Configuration Web Services

ICR Configuration Web Services provides administration of ICR Configuration entities such as Business Hours, Holidays, Call Center, Skill and Destination over web service. For each of these entities, a web service is available with add, update, delete, and retrieve operation.

Termination reason for wait treatment application

ICR CCA is enhanced to provide a termination reason to the wait treatment application. ICR CCA terminates the wait treatment application for multiple reasons, for example when an agent answers a queued call or the caller disconnects the call while listening to a wait treatment or when a spike is detected in estimated wait time or in queue position. For these reasons, ICR CCA terminates the running wait treatment application by passing the appropriate reason code to the wait treatment application.

Support for SHA-2 Certificate

The `update_cert.sh` script is enhanced to generate the SHA-2 certificate on a standalone ICR server. The ICR 7.0.1 release supports SHA-2 certificate for secured communication with products such as Avaya Aura® Experience Portal and Avaya Aura® Session Manager.

ICR CCA properties configurable at runtime

In ICR, you can configure properties at runtime for the Call Control Application (CCA) that is running. These properties are specific to the CCA that you are configuring. For each CCA, you can configure different values for all the properties.

ICR CCA periodically checks the properties that you configured on the Change ICR Applications page and uses the changed values for the new calls that arrive in ICR.

Zoning support

In Avaya Aura® Experience Portal, zoning is a functionality to logically distribute various systems and resources, such as applications and media servers, into different groups called zones. With zoning, organizations can best utilize the resources that are widespread across the geographical locations. Distributing the resources into zones helps organizations to reduce the time and cost in serving customers in a particular zone.

ICR being a managed application of Avaya Aura® Experience Portal, supports the zoning functionality for the following components:

- Call control application

You can add call control applications for a particular zone and configure the dependent applications, such as self service application (SSA), wait treatment applications (WTAs), and error handling applications (EHAs) for that zone.

- Real time monitoring

You can filter the application and queued calls based on the selected zones. By filtering the details based on the selected zones, you can easily find the application and queued call details for a particular zone.

- SIP connection for ICR Core server

The ICR Core server can use the SIP connection configured in a particular zone. When adding an ICR Core server, you can specify the zone from which the ICR Core server can use the SIP connection to find the best location to route a call.

Consultation transfer from Self Service Application

Consultation transfer, which also called as Supervised transfer, is a feature in Avaya Aura® Experience Portal (AAEP). As ICR is a managed application of AAEP, ICR supports the Consultation transfer feature.

With Consultation transfer, an ICR Call Control Application (CCA) can transfer a call from Self Service Application (SSA) to another destination without releasing the call till the call is successfully transferred to the destination. If the call transferring fails, ICR CCA returns the appropriate response to SSA. SSA then, takes further action to handle the call transfer.

The consultation transfer feature is similar to a blind transfer feature except that, in consultation transfer the outcome of the call transfer is known and the call did not drop even for an unsuccessful transfer attempt.

The application developer can use the Consultation transfer feature and build custom business logic by checking the response that the consultation transfer feature returns.

For more information about the consultation transfer node usage and the code returned on success and failures of the call transfer, see the *Consultation Transfer node* topic in the *Nodes and Palette* appendix of the Avaya Aura® Orchestration Designer (AAOD) help.

Preferred and failover ICR Core

After you install ICR and configure ICR Core servers, you can set the preferred and failover ICR Core servers on the application server.

With the preferred and failover settings on the application server, Pluggable Data Connector (PDC) can receive the routing information for a call from a specific ICR Core server and keeps the routing requests within a particular site. For example, PDC can route all calls arrived at Site 1 to the ICR Core servers configured as preferred at Site 1. If the preferred ICR Core servers at Site 1 are

unavailable, PDC can route all calls arrived at Site 1 to the ICR Core servers configured as failover at Site 1.

Earlier, the application server was randomly selecting the best available ICR Core server from the available ICR Core servers. The random selection of ICR Core server was ensuring the equal distribution of call routing requests. But this leads to sending routing requests to ICR core in a different site and increasing the network utilization. Therefore, ICR 7.0 and later provides an option to set the preferred and failover ICR Core servers.

Sending real time EWT and queue position values to a running WTA

Avaya Aura® Experience Portal features an enhanced VoiceXML browser to send and receive the external events within a voice application in a synchronous and asynchronous mode.

As ICR is a managed application of Avaya Aura® Experience Portal, ICR leverages the enhancement of the VoiceXML browser to send the updated or real time EWT and queue position values to the running WTA through external event.

CMS rt_socket routing

Intelligent Customer Routing provides support for using Call Management System (CMS) as the data source to receive the real-time data about skills and agent's statistics for all ACDs.

CMS provides more granular level information about skills and agents. ICR uses the information of skills and agents, and finds the best destination ACD to route the calls under the agent surplus and the call surplus situations across ACDs.

ICR Core receives the real time data from CMS using the `rt_socket` package. The `rt_socket` package is an Avaya Professional Services (APS) offering, which provides the near real time data feed through TCP socket interface.

Note:

- For CMS based routing, ICR supports only the first ten skills configured for an agent.
- ICR Core receives the agent feed from CMS only after the agents log in to ACD skills configured in ICR.

Support SIP endpoints

ICR supports the SIP endpoints and also a mixed environment consisting of SIP endpoints and H.323 endpoints.

Customers having contact centers with SIP environment or mixed environment can use ICR to intelligently route the calls.

Load balancing across SIP proxy servers

ICR performs the load balancing of BSR polling requests to Communication Manager across multiple SIP proxy servers. ICR leverages the SIP connection configuration of Avaya Aura[®] Experience Portal. In a SIP connection configuration, the administrator can designate some proxy servers as primary servers for a service and some proxy servers as backup servers. The administrator can do this designation by setting the priority and weight to each configured proxy server.

The administrator can set the Priority property to designate the primary and secondary role to the proxy servers. Similarly, the administrator can set the Weight property to decide how calls that have the same priority must be distributed across proxy servers.

Dynamically reducing the cache freshness interval in an agent surplus situation

In ICR, you can configure a property to dynamically reduce the cache freshness interval in an agent surplus situation.

ICR identifies an agent surplus situation when Communication Manager returns the BSR response with an estimated wait time (EWT) of 0. ICR dynamically reduces the polling cycle to the configured value so that frequent polling can occur and ICR can provide efficient route destination.

When an EWT that ICR receives from Communication Manager is greater than 0, ICR dynamically reverts the cache freshness value to the original value configured on the Change Skill Configuration page.

Opt-out from WTA

Using the opt-out from WTA enhancement, the ICR call control application (CCA) can cancel the calls in a queue and disconnects the caller. If you do not want the ICR CCA to disconnect the call, you can set the ICR CCA to blind transfer the call to another destination.

Call routing enhancement

During cache freshness, ICR Core always returns the same cached destination VDN to route the calls. Therefore, ICR cannot efficiently route the calls across multiple ACDs.

With the call routing enhancement, ICR Core can efficiently route the calls across multiple ACDs within cache freshness interval by adjusting the BSR information in cache.

Self Service First using Avaya Aura® Experience Portal

Self Service First is provided through Avaya Aura® Experience Portal as the first point of access to an organization. Calls connect to Avaya Aura® Experience Portal before connecting to an Automatic Call Distribution (ACD).

Intelligent Routing

In a contact center, agents or experts are the most valuable and most expensive resources. Therefore, organizations must effectively utilize the time and skills of agents or experts in the organization.

Using Avaya Aura® Experience Portal as the call control point, ICR selects, among a group of contact center locations, and routes the call to the most optimal contact center and the best-suited agent at that time. With the Best Service Routing (BSR) infrastructure, ICR locates the best location for a call based on the shortest queue and skill availability.

ICR also has the ability to provide self service to customers, place a virtual call and park that call on ACD, and provide an enhanced wait treatment.

Enhanced or advanced wait treatment

While a call is in a queue of Communication Manager, waiting for an agent to become available, ICR can provide advanced wait treatments, such as self service or predictive offers to a caller.

An organization can use the queue time for performing activities such as:

- Gathering additional information from a customer, which is necessary for an agent when the call is connected.
- Resolving issues by providing information to a customer or gathering information from a customer. For example, providing information to a customer about the amount due for the credit card or asking a customer to validate the credit card by providing the pin number.
- Offering customers the opportunities based on previous activities or purchases.
- Playing special messages regarding new promotions applicable to particular customers.
- Providing customers the ability to sign up for new value added services, such as SMS messages with bill due dates, amounts, and shipment information.
- Providing the call back options to the customer based on estimated or predicted queue wait time.

When an agent becomes available, the call is connected to the agent.

Reporting

Avaya ICR provides real-time monitoring and historical reporting.

In real-time monitoring, you can view the real-time status of the calls in applications and calls in a queue. In the status, you can view the calls for each applications, call for a particular skill, or calls for a particular call center.

In historical reporting, you can view the details of the calls that ICR call control application (CCA) sessions handle and process. The historical report includes information from the time a call arrives in the ICR CCA session up to the call exit from the ICR CCA session.

ICR Pluggable Data Connector (PDC)

ICR Pluggable Data Connector (PDC) is a connector between Self Service Application (SSA) and ICR Core.

ICR PDC is built to integrate ICR into Avaya Aura® Orchestration Designer. ICR PDC is a generic connector, which an application developer can use without knowledge of call centers and ICR Core. The purpose of ICR PDC is to provide a SIP URI, which is the routing destination for a skill.

Sample Applications

Avaya ICR provides the following sample Orchestration Designer VXML applications to start defining the segmentation and wait treatment:

- SSA: Self service application
- WTA: Wait treatment application
- EHA: Error handling application

These sample applications show how you can incorporate caller segmentation, wait treatment applications, and self-service applications into an ICR application. These sample applications are reusable templates that you can further customize to meet the customer requirements.

The ICR SDK contains the following two extension modules that are provided as samples for developers to understand and develop their own routing modules:

- Preferred Site Module
- Percentage Distribution Module

 **Note:**

The Preferred Site Module and the Percentage Distribution Module must not be used in a production environment.

Avaya Aura® Experience Portal integration

You can seamlessly integrate ICR with Avaya Aura® Experience Portal to:

- Administer, configure, and manage serviceability and licensing.
- Manage users and assign ICR specific roles to users.
- Monitor alarms and different types of logs, such as audit logs, information logs, and error logs.

- Back up and restore operations.

Feature comparison

The following table summarizes the operational and functional changes in Intelligent Customer Routing (ICR) by release. The intent of this table is to identify changes in the way existing functionality is invoked or changes to the existing functional behavior.

Functionality	7.0 FP1	7.0	6.0 SP2	6.0 SP1
ICR SDK	Yes	No	No	No
ICR PDC enhancements — Added new fields and methods	Yes	No	No	No
ICR Connector for third party or custom applications	Yes	No	No	No
ICR Configuration Web Services	Yes	No	No	No
Termination Reason for Wait Treatment application	Yes	No	No	No
Support for SHA-2 Certificate	Yes	No	No	No
Runtime configurable ICR CCA properties	Yes	Yes	No	No
Zoning support	Yes	Yes	No	No
Consultation transfer from Self Service Application	Yes	Yes	No	No
Preferred and failover ICR Core	Yes	Yes	No	No
Sending updated EWT and queue position values to the running WTA	Yes	Yes	No	No
Call Management System (CMS) based routing enhancements	Yes	Yes	No	No
SIP endpoint support	Yes	Yes	Yes	No
Load balancing across SIP proxy servers	Yes	Yes	Yes	No
Dynamically reducing cache freshness interval in agent surplus condition	Yes	Yes	Yes	No
Opt out from WTA	Yes	Yes	Yes	Yes
Call routing enhancements	Yes	Yes	Yes	Yes
Self service first using Avaya Aura [®] Experience Portal	Yes	Yes	Yes	Yes
Intelligent routing	Yes	Yes	Yes	Yes
Enhanced or Advanced Wait Treatment	Yes	Yes	Yes	Yes
Reporting	Yes	Yes	Yes	Yes
ICR Pluggable Data Connector	Yes	Yes	Yes	Yes
Sample applications	Yes	Yes	Yes	Yes
Avaya Aura [®] Experience Portal integration	Yes	Yes	Yes	Yes

Chapter 3: Interoperability

Product compatibility

The following products, browsers, databases, and gateways, are compatible with Intelligent Customer Routing (ICR) Release 7.0.1. For the latest and most accurate compatibility information, go to <http://support.avaya.com/CompatibilityMatrix/Index.aspx>.

Products

Product Name	Release Number
Avaya Aura® Call Center Elite	6.0.1, 6.2, 6.3, 6.3.2, and 6.3.6
Avaya Aura® Communication Manager	6.0.1, 6.2, 6.3, 6.3.2 (AA 6.2 FP3), and 6.3.6 (AA 6.2 FP4)
Avaya Aura® Experience Portal	7.0.1
Avaya Aura® Orchestration Designer	7.0.1
Avaya Aura® Session Manager	6.1, 6.2, 6.3, 6.3.4 (AA 6.2 FP3) ¹ 6.3.8 ²
Avaya Session Border Controller for Enterprise	6.3
Call Management System (CMS)	16.3, 17.0, and 17.0.3 RT_Socket interface 4.3.8a
Proactive Outreach Manager	3.0 and 3.0.1

Database

The supported external database versions are:

- Postgres 9.2.x
- Oracle 10 and 11g
- Microsoft SQL Server 2008, 2010, and 2012

For more information on external database, see *Avaya Aura® Experience Portal Overview and Specification*.

Gateway

- Avaya G860 R2.0

¹ ICR 7.0.1 supports only TCP proxy transport connection type with Avaya Aura® Session Manager.

² ICR 7.0.1 supports both TCP and TLS with SHA2 proxy connection type with Avaya Aura® Session Manager 6.3.8 and later.

- AudioCodes Mediant 2000 Firmware 5.80A.023.006

VMWare

- ESXi Server 5.5

Operating system compatibility

The following Linux versions are supported for a fresh install of Intelligent Customer Routing (ICR) 7.0.1:

- Red Hat Enterprise Linux (RHEL) 6.5 (64-bit)
- Avaya Enterprise Linux based on RHEL 6.5 (RH6.5.64-AV01EP7FP1)

The following Linux versions are supported for upgrades from ICR 6.0.x to ICR 7.0.1:

- RHEL 6.5 (64-bit)
- Avaya Enterprise Linux based on RHEL 6.5 (RH6.5.64-AV01EP7FP1)

For upgrades from ICR 7.0 to ICR 7.0.1, the operating system upgrade is optional. You can continue to use RHEL 6.4 (64-bit) or Avaya Enterprise Linux based on RHEL 6.4.

*** Note:**

Avaya recommends that you upgrade to RHEL 6.5 (64-bit) or Avaya Enterprise Linux based on RHEL 6.5 to avail the security fixes.

The Avaya-provided server offer includes Enterprise Linux Installer, which installs the Avaya Enterprise Linux operating system.

Browser compatibility

ICR 7.0.1 supports the following browsers:

- Internet Explorer version 8
- Internet Explorer version 9
- Internet Explorer version 10 compatibility mode
- Firefox version 32.0.3
- Firefox version 33.0.2
- Firefox version 33.1

Chapter 4: Performance specifications

In Avaya lab, various tests are conducted to measure the performance of ICR running on a physical system and running in a virtualized environment.

While conducting the tests, the results are collected for the capability and scalability of ICR, and the utilization of the system by ICR.

Related links

[ICR running on a physical system](#) on page 24

[ICR running in a virtualized environment](#) on page 26

ICR running on a physical system

This section provides the performance test results of various tests performed on ICR running on a physical system in the Avaya lab.

Related links

[Performance specifications](#) on page 24

[Configuration of the physical system used for testing](#) on page 24

[Capacity and scalability specification for Get Destination method](#) on page 25

[Capacity and scalability specification for Get All Destination and Invoke Extension method](#) on page 25

Configuration of the physical system used for testing

The following configurations were used for testing the performance of ICR running on a physical system.

- CPU: Intel® Xeon® E5620 at 2.40 GHz, 2 CPU, 4 Core with HT enabled
- Harddisk: 100-GB
- Memory: 12-GB
- BHCC: 150000
- ACDs: 10

Related links

[ICR running on a physical system](#) on page 24

Capacity and scalability specification for Get Destination method

The following table provides the capacity values of ICR components based on the tests conducted on ICR running on a physical system using Get Destination method.

Parameter name	Value
Number of ICR skills	500
Number of ACDs	10
Number of agents logged in each ACD	2000 to 5000
Number of agents logged in across all ACDs	26000
Number of ACD skills assigned to an agent	10
Number of ACD skills in each ACD for CMS routing	500
Number of ACD skills across all ACDs for CMS routing	5000
Number of web service requests for an ICR Core server in an hour	75000
Number of Polling and Queue VDN for each ICR skill	10
Number of Polling and Queue VDNs across all ICR skills	5000
Number of calls completed in an hour	150000
Number of RT_socket sessions on an ICR Core server	20
Number of agent records across RT_socket sessions	26000
Number of ACD skill records across RT_socket sessions	5000
Minimum CMS session refresh interval for an agent data feed	6 seconds
Minimum CMS session refresh interval for a skill data feed	3 seconds
Number of agents monitored per CMS	6000 to 10000

Related links

[ICR running on a physical system](#) on page 24

Capacity and scalability specification for Get All Destination and Invoke Extension method

The following table provides the capacity values of ICR components based on the tests conducted on ICR running on a physical system for testing Get All Destination and Invoke Extension method.

Parameter name	Value
Number of ICR skills	50
Number of ACDs	2
Number of agents logged in each ACD	3000
Number of agents logged in across all ACDs	6000

Table continues...

Parameter name	Value
Number of ACD skills assigned to an agent	10
Number of ACD skills in each ACD for CMS routing	400
Number of ACD skills across all ACDs for CMS routing	800
Number of Polling and Queue VDN for each ICR skill	20
Number of Polling and Queue VDNs across all ICR skills	1000
Number of calls completed in an hour	30000
Number of RT_socket sessions on an ICR Core server	4
Number of agent records across RT_socket sessions	6000
Number of ACD skill records across RT_socket sessions	800
Minimum CMS session refresh interval for an agent data feed	6 seconds
Minimum CMS session refresh interval for a skill data feed	3 seconds
Number of agents monitored per CMS	6000

Related links

[ICR running on a physical system](#) on page 24

ICR running in a virtualized environment

ICR is a managed application of Avaya Aura® Experience Portal. Therefore, ICR supports the virtualized environment that Avaya Aura® Experience Portal supports. For more information about virtualized environment of Avaya Aura® Experience Portal, see *Deploying Avaya Aura® Experience Portal in an Avaya Customer Experience Virtualized Environment*.

This section provides the performance test results of various tests that are performed on ICR running in a virtualized environment.

Related links

[Performance specifications](#) on page 24

[Configuration of the virtualized environment used for testing](#) on page 26

[Capacity and scalability specification](#) on page 27

Configuration of the virtualized environment used for testing

The following configurations were used for testing the performance of ICR running in a virtualized environment.

- Virtualized environment: VMWare ESXi 5.5
- CPU: Intel® Xeon® CPU E5-4620 @ 2.20 GHz, 4 vCPU
- Harddisk: 120-GB
- Memory: 8-GB

- BHCC: 50000
- ACDs: 2
- ICR Core servers: 2

Related links

[ICR running in a virtualized environment](#) on page 26

Capacity and scalability specification

The following table provides the capacity values of ICR components based on the tests conducted on ICR running in a virtualized environment.

Parameter name	Value
Number of ICR skills	50
Number of ACDs	2
Number of agents logged in each ACD	3000
Number of agents logged in across all ACDs	6000
Number of ACD skills assigned to an agent	10
Number of ACD skills in each ACD for CMS routing	400
Number of ACD skills across all ACDs for CMS routing	800
Number of web service requests for an ICR Core server in an hour	25000
Number of Polling and Queue VDN for each ICR skill	20
Number of Polling and Queue VDNs across all ICR skills	1000
Number of calls completed in an hour	50000
Number of RT_socket sessions on an ICR Core server	4
Number of agent records across RT_socket sessions	6000
Number of ACD skill records across RT_socket sessions	800
Minimum CMS session refresh interval for an agent data feed	6 seconds
Minimum CMS session refresh interval for a skill data feed	3 seconds
Number of agents monitored per CMS	6000

Related links

[ICR running in a virtualized environment](#) on page 26

Chapter 5: Environmental requirements

Before implementing Intelligent Customer Routing (ICR), Release 7.0.1 ensure that you review the environmental requirements for ICR.

ICR is a managed application of Experience Portal Manager. Therefore, the environmental requirements mentioned for Experience Portal Manager are also applicable to ICR. For more information about environmental requirements for Experience Portal Manager, see *Avaya Aura® Experience Portal Overview and Specification*.

Chapter 6: Security

Security specification

Before implementing Intelligent Customer Routing (ICR), Release 7.0.1 ensure that your security staff reviews and approves the ICR deployment plan. You must engage the expertise of your security staff early in the implementation process. The security staff must consider how they will incorporate the ICR system into their routine maintenance of virus protection, patches, and service packs.

ICR is a managed application of Experience Portal Manager. Therefore, the security specifications mentioned for Experience Portal Manager are also applicable to ICR. For more information about security specifications for Experience Portal Manager, see *Avaya Aura® Experience Portal Overview and Specification*.

For more information and documentation related to security of all Avaya products, see the Avaya Security Advisories website at <http://support.avaya.com/security>.

Ports utilization

For complete port matrix information, see *Intelligent Customer Routing Port Matrix* at the Avaya Support website: <http://support.avaya.com/security>.

Chapter 7: Licensing requirements

For ICR, you require licenses for ICR Core functionality and ICR Realtime Monitoring. With ICR Core functionality license, ICR can select the best destination for routing a call. With ICR Realtime Monitoring license, ICR can display call details on the ICR Monitor page. You can manage the licensing of ICR using Web License Manager (WebLM) server, which is an integral part of the Avaya Aura[®] Experience Portal.

Experience Portal supports the Enterprise WebLM server and local WebLM server. ICR supports only local WebLM server. Therefore, if Experience Portal is using the Enterprise WebLM server, you must install standard ICR licenses to the local WebLM server.

Glossary

ACD Skill	The Skill configured on Communication Manager or ACD
Application server	A server that runs in conjunction with a Web server and allows client programs to call methods over HTTP.
Avaya Aura®	A converged communications platform unifying media, modes, network, devices, applications. Avaya Aura® is based on the SIP architecture with Session Manager at the core.
Call Center	Communication Manager or ACD configured in ICR
Communication Manager	A key component of Avaya Aura®. It delivers rich voice and video capabilities and provides a resilient, distributed network for media gateways and analog, digital, and IP-based communication devices. It includes advanced mobility features, built-in conference calling, contact center applications and E911 capabilities.
Destination	A queue VDN configured in ICR.
EPM	Experience Portal Manager (EPM) is the Web interface used to access Experience Portal.
ICR Skill	The Skill configured in ICR
Session Manager	A SIP routing and integration tool that is the core component within the Avaya Aura® solution.
SIP	Session Initiation Protocol (SIP) is an application-layer control signaling protocol for creating, modifying, and terminating sessions with more than one participant using http like text messages.
TCP	Transmission Control Protocol is one of the core protocols of Internet Protocol Suite, the set of network protocols used for the Internet.
TLS	Transport Layer Security (TLS) is a cryptographic protocol that provides communication security over the Internet.

Index

A

additional fields and methods in ICR PDC	14
Avaya Aura Experience Portal	20
self service first	19

B

backup and restore	13
--------------------------	--------------------

C

call routing	18
capacity specifications	25 , 27
CMS	17
CMS rt_socket routing	17
compatibility	
browser	23
compatibility matrix for ICR	22
configurations	
for performance testing	24 , 26
configuration web services	15
consultation transfer	16
consultation transfer from SSA	16

D

document changes	6
dynamically reducing the cache freshness interval	18

E

Enhanced/Advanced Wait Treatment	13
enhancement	
call routing	18
EPM	13

F

feature comparison	21
feature description	13
additional fields and methods in ICR PDC	14
configuration web services	15
ICR connector for custom applications	14
ICR connector for third party applications	14
SDK	14
support for SHA-2 certificate	15
termination reason for wait treatment application	15
termination reason for WTA	15
zoning support	15
feature description configurable at runtime	
ICR CCA properties	15

features	13
----------------	--------------------

I

ICR	
virtualized environment	26
ICR CCA configuration properties	15
ICR Core	
preferred and failover	16
ICR overview	12
ICR pluggable data connector	20
Intelligent Customer Routing overview	12
intelligent routing	19

L

licensing requirements	30
load balancing	
across SIP proxy servers	18

N

new features in ICR	13
new in ICR 7.0.1	13
new in this release	13

O

operating system compatibility	23
opt-out from WTA	18
overview	12

P

PDC	13 , 20
performance specifications	24
ICR running in virtualized environment	26
ICR running on physical system	24
performance testing	
configurations	24 , 26
physical system	
capacity specification	25
performance specifications	24
scalability specification	25
pluggable data connector	20
ports utilization	29
preferred and failover ICR Core	16

R

related documentation	6
-----------------------------	-------------------

reporting [19](#)
 reports [13](#)
 requirements
 environmental [28](#)

S

sample applications [13, 20](#)
 EHA [13](#)
 SSA [13](#)
 WTA [13](#)
 scalability specifications [25, 27](#)
 SDK [14](#)
 security specification [29](#)
 Self Service Application
 consultation transfer [16](#)
 self service first [19](#)
 sending real time values to running WTA
 EWT [17](#)
 queue position [17](#)
 SIP endpoints [17](#)
 SIP proxy servers
 load balancing [18](#)
 specifications
 capacity [25, 27](#)
 scalability [25, 27](#)
 support [11](#)
 support for SIP endpoints [17](#)

T

training [9](#)

U

using Avaya Aura Experience Portal
 for self service first [19](#)

V

videos [10](#)
 virtualized environment [26](#)
 capacity specification [27](#)
 configurations [26](#)
 scalability specification [27](#)
 virtualized environment [26](#)

W

wait treatment
 enhanced or advanced [19](#)
 wait treatment application
 termination reason [15](#)
 warranty [11](#)
 warranty on ICR [11](#)
 WTA

termination reason [15](#)

Z

zoning support [15](#)