



Avaya Workplace Client (Windows) Release Notes

Release 3.21
Issue 1.1
Sep 2021

© 2021 Avaya, Inc.
All Rights Reserved.

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Documentation disclaimer

“Documentation” means information published in varying mediums which may include product information, operating instructions and performance specifications that are generally made available to users of products. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of Documentation unless such modifications, additions, or deletions were performed by or on the express behalf of Avaya. End User agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or Documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on Avaya hardware and software. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language, as well as information regarding support for this product while under warranty is available to Avaya customers and other parties through the Avaya Support website: <https://support.avaya.com/helpcenter/getGenericDetails?detailId=C20091120112456651010> under the link “Warranty & Product Lifecycle” or such successor site as designated by Avaya. Please note that if You acquired the product(s) from an authorized Avaya Channel Partner

outside of the United States and Canada, the warranty is provided to You by said Avaya Channel Partner and not by Avaya.

“**Hosted Service**” means an Avaya hosted service subscription that You acquire from either Avaya or an authorized Avaya Channel Partner (as applicable) and which is described further in Hosted SAS or other service description documentation regarding the applicable hosted service. If You purchase a Hosted Service subscription, the foregoing limited warranty may not apply but You may be entitled to support services in connection with the Hosted Service as described further in your service description documents for the applicable Hosted Service. Contact Avaya or Avaya Channel Partner (as applicable) for more information.

Hosted Service

THE FOLLOWING APPLIES ONLY IF YOU PURCHASE AN AVAYA HOSTED SERVICE SUBSCRIPTION FROM AVAYA OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE), THE TERMS OF USE FOR HOSTED SERVICES ARE AVAILABLE ON THE AVAYA WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/LICENSEINFO) UNDER THE LINK “Avaya Terms of Use for Hosted Services” OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, AND ARE APPLICABLE TO ANYONE WHO ACCESSES OR USES THE HOSTED SERVICE. BY ACCESSING OR USING THE HOSTED SERVICE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE DOING SO (HEREINAFTER REFERRED TO INTERCHANGEABLY AS “YOU” AND “END USER”), AGREE TO THE TERMS OF USE. IF YOU ARE ACCEPTING THE TERMS OF USE ON BEHALF A COMPANY OR OTHER LEGAL ENTITY, YOU REPRESENT THAT YOU HAVE THE AUTHORITY TO BIND SUCH ENTITY TO THESE TERMS OF USE. IF YOU DO NOT HAVE SUCH AUTHORITY, OR IF YOU DO NOT WISH TO ACCEPT THESE TERMS OF USE, YOU MUST NOT ACCESS OR USE THE HOSTED SERVICE OR AUTHORIZE ANYONE TO ACCESS OR USE THE HOSTED SERVICE.

Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, <https://support.avaya.com/LICENSEINFO>, UNDER THE LINK “AVAYA SOFTWARE LICENSE TERMS (Avaya Products)” OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM

AVAYA INC., ANY AVAYA AFFILIATE, OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AVAYA CHANNEL PARTNER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA CHANNEL PARTNER; AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE ("AVAYA").

Avaya grants You a license within the scope of the license types described below, with the exception of Heritage Nortel Software, for which the scope of the license is detailed below. Where the order documentation does not expressly identify a license type, the applicable license will be a Designated System License. The applicable number of licenses and units of capacity for which the license is granted will be one (1), unless a different number of licenses or units of capacity is specified in the documentation or other materials available to You. "**Software**" means computer programs in object code, provided by Avaya or an Avaya Channel Partner, whether as stand-alone products, pre-installed on hardware products, and any upgrades, updates, patches, bug fixes, or modified versions thereto. "**Designated Processor**" means a single stand-alone computing device. "**Server**" means a Designated Processor that hosts a software application to be accessed by multiple users. "**Instance**" means a single copy of the Software executing at a particular time: (i) on one physical machine; or (ii) on one deployed software virtual machine ("**VM**") or similar deployment.

License types

Concurrent User License (CU). End User may install and use the Software on multiple Designated Processors or one or more Servers, so long as only the licensed number of Units are accessing and using the Software at any given time as indicated in the order, Documentation, or as authorized by Avaya in writing. A "Unit" means the unit on which Avaya, at its sole discretion, bases the

pricing of its licenses and can be, without limitation, an agent, port or user, an e-mail or voice mail account in the name of a person or corporate function (e.g., webmaster or helpdesk), or a directory entry in the administrative database utilized by the Software that permits one user to interface with the Software. Units may be linked to a specific, identified Server or an Instance of the Software.

Heritage Nortel Software

"Heritage Nortel Software" means the software that was acquired by Avaya as part of its purchase of the Nortel Enterprise Solutions Business in December 2009. The Heritage Nortel Software is the software contained within the list of Heritage Nortel Products located at <https://support.avaya.com/LicenseInfo/> under the link "Heritage Nortel Products," or such successor site as designated by Avaya. For Heritage Nortel Software, Avaya grants Customer a license to use Heritage Nortel Software provided hereunder solely to the extent of the authorized activation or authorized usage level, solely for the purpose specified in the Documentation, and solely as embedded in, for execution on, or for communication with Avaya equipment. Charges for Heritage Nortel Software may be based on extent of activation or use authorized as specified in an order or invoice.

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, Hosted Service, or hardware provided by Avaya. All content on this site, the documentation, Hosted Service, and the product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, and or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Virtualization

The following applies if the product is deployed on a virtual machine. Each product has its own ordering code and license types. Note that each Instance of a product must be separately licensed and ordered. For example, if the end user customer or Avaya Channel Partner would like to

install two Instances of the same type of products, then two products of that type must be ordered.

Third Party Components

“**Third Party Components**” mean certain software programs or portions thereof included in the Software or Hosted Service may contain software (including open source software) distributed under third party agreements (“Third Party Components”), which contain terms regarding the rights to use certain portions of the Software (“Third Party Terms”). As required, information regarding distributed Linux OS source code (for those products that have distributed Linux OS source code) and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply is available in the products, Documentation or on Avaya’s website at: <https://support.avaya.com/Copyright> or such successor site as designated by Avaya. The open source software license terms provided as Third Party Terms are consistent with the license rights granted in these Software License Terms, and may contain additional rights benefiting You, such as modification and distribution of the open source software. The Third Party Terms shall take precedence over these Software License Terms, solely with respect to the applicable Third Party Components, to the extent that these Software License Terms impose greater restrictions on You than the applicable Third Party Terms.

The following applies only if the H.264 (AVC) codec is distributed with the product. THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD (“AVC VIDEO”) AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE <HTTP://WWW.MPEGLA.COM>

Service Provider

THE FOLLOWING APPLIES TO AVAYA CHANNEL PARTNER’S HOSTING OF AVAYA PRODUCTS OR SERVICES. THE PRODUCT OR HOSTED SERVICE MAY USE THIRD PARTY COMPONENTS SUBJECT TO THIRD PARTY TERMS AND REQUIRE A SERVICE PROVIDER TO BE INDEPENDENTLY LICENSED DIRECTLY FROM THE THIRD PARTY SUPPLIER. AN AVAYA CHANNEL PARTNER’S HOSTING OF AVAYA PRODUCTS MUST BE AUTHORIZED IN WRITING BY AVAYA AND IF THOSE HOSTED PRODUCTS USE OR

EMBED CERTAIN THIRD PARTY SOFTWARE, INCLUDING BUT NOT LIMITED TO MICROSOFT SOFTWARE OR CODECS, THE AVAYA CHANNEL PARTNER IS REQUIRED TO INDEPENDENTLY OBTAIN ANY APPLICABLE LICENSE AGREEMENTS, AT THE AVAYA CHANNEL PARTNER’S EXPENSE, DIRECTLY FROM THE APPLICABLE THIRD PARTY SUPPLIER.

WITH RESPECT TO CODECS, IF THE AVAYA CHANNEL PARTNER IS HOSTING ANY PRODUCTS THAT USE OR EMBED THE G.729 CODEC, H.264 CODEC, OR H.265 CODEC, THE AVAYA CHANNEL PARTNER ACKNOWLEDGES AND AGREES THE AVAYA CHANNEL PARTNER IS RESPONSIBLE FOR ANY AND ALL RELATED FEES AND/OR ROYALTIES. THE G.729 CODEC IS LICENSED BY SIPRO LAB TELECOM INC. SEE <WWW.SIPRO.COM/CONTACT.HTML>. THE H.264 (AVC) CODEC IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO: (I) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD (“AVC VIDEO”) AND/OR (II) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION FOR H.264 (AVC) AND H.265 (HEVC) CODECS MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE <HTTP://WWW.MPEGLA.COM>.

Compliance with Laws

You acknowledge and agree that it is Your responsibility for complying with any applicable laws and regulations, including, but not limited to laws and regulations related to call recording, data privacy, intellectual property, trade secret, fraud, and music performance rights, in the country or territory where the Avaya product is used.

Preventing Toll Fraud

“Toll Fraud” is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company’s behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If You suspect that You are being victimized by Toll Fraud and You need technical assistance or support, call Technical Service Center Toll Fraud Intervention Hotline at

+1-800-643-2353 for the United States and Canada. For additional support telephone numbers, see the Avaya Support website: <https://support.avaya.com>, or such successor site as designated by Avaya.

Security Vulnerabilities

Information about Avaya's security support policies can be found in the Security Policies and Support section of <https://support.avaya.com/security>

Suspected Avaya product security vulnerabilities are handled per the Avaya Product Security Support Flow (<https://support.avaya.com/css/P8/documents/100161515>).

Downloading Documentation

For the most current versions of Documentation, see the Avaya Support website: <https://support.avaya.com>, or such successor site as designated by Avaya.

Contact Avaya Support

See the Avaya Support website: <https://support.avaya.com> for product or Hosted Service notices and articles, or to report a problem with your Avaya product or Hosted Service. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: <https://support.avaya.com/> (or such successor site as designated by Avaya), scroll to the bottom of the page, and select Contact Avaya Support.

Trademarks

The trademarks, logos and service marks ("Marks") displayed in this site, the Documentation, Hosted Service(s), and product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its affiliates, its licensors, its suppliers, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the Documentation, Hosted Service(s) and product(s) should be construed as granting, by implication, estoppel, or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party.

Avaya is a registered trademark of Avaya Inc.

All non-Avaya trademarks are the property of their respective owners.

Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Contents

Change history	7
Introduction.....	7
Documentation Catalog	7
Product Release Matrix	7
What's new in Avaya Workplace for Windows	8
Release 3.21	8
Release 3.20.....	8
Installation	8
Pre-Installation Requirements.....	8
Compatibility	8
Contacting support	9
Contact support checklist.....	9
Contact support tasks	9
Avaya Workplace for Windows.....	10
Required artifacts for Avaya Workplace for Windows Release 3.21	10
Required patches	10
New Configuration Parameters.....	10
Avaya Calling for Microsoft Teams.....	11
Product Release Matrix.....	11
What's new in Avaya Calling for Microsoft Teams.....	12
Release 1.2	12
Pre-Installation Requirements.....	12
Documentation & Localization.....	13
Avaya Documentation Center	13
Documentation errata	13
Localization	14
Troubleshooting the installation	15
Known issues and workarounds in Avaya Workplace for Windows Release 3.21 and Avaya Calling 1.2.....	16
Fixes in Avaya Workplace for Windows Release 3.21 and Avaya Calling 1.2.....	19
Appendix A: Acronyms	22

Change history

Issue	Date	Description
1.1	09/07/2021	3.21 GA issue for the Avaya Workplace Windows Client with Avaya Calling for Microsoft Teams 1.2
1.0	08/31/2021	3.21 GA issue for the Avaya Workplace Windows Client.
1.0	07/20/2021	3.20 GA issue for the Avaya Workplace Windows Client.
1.0	06/08/2021	3.19 GA issue for the Avaya Workplace Windows Client.

Introduction

This document provides late-breaking information to supplement the Avaya Workplace Windows Client 3.21 software and documentation. For updated documentation, product support notices, and service pack information, go to the Avaya Support site at <http://support.avaya.com>.

Please refer to the latest Avaya Aura® 8.1.3.x Release Notes for information specific to the Avaya Aura® feature and service packs.

Documentation Catalog

The Documentation Catalog document lists down the various guides that are available for the Avaya Aura® solution. For details see <https://downloads.avaya.com/css/P8/documents/101050513>

Product Release Matrix

Product Name	Release
Avaya Workplace for Windows	3.21.0.64
Avaya Workplace for MacOS	3.21.0.64
Avaya Workplace for Android	3.21.0.64
Avaya Workplace for iOS	3.21.0.64

What's new in Avaya Workplace for Windows

Release 3.21

In addition to bug fixes, the following new features are provided with the 3.21 release:

- Limit number of concurrent calls
- Calling Party Number Block/Unblock for Internal and External Calls
- 'Queue Statistics', 'ASAI UII', 'Support Supervisor Assist' features are available on Agent Bar
- External App API Enhancements for CC Calls
- Updated Outlook Plugin – 3.21.0.16

Release 3.20

In addition to bug fixes, the following new features are provided with the 3.20 release:

- Contextual Screen Pop (triggered by start, login, logout, reset and other actions)
- Button Module enhancements to support –
 - Team Button
 - Call redirection features for other extensions –
 - Send All Calls
 - Call forward
 - Call forward busy/no answer
 - Enhanced Call forward
- Additional Avaya Contact Center Elite Agent features – Agent bar user interface with Agent states
- Deskphone support for Avaya Contact Center Elite Agent features
- Local Auto answer option
- Updated Outlook Plugin – 3.20.0.11

Installation

Pre-Installation Requirements

In order to install the Avaya Workplace Windows Client on your Windows device, you need to have the Microsoft .NET Framework version 4.8 installed. The download link for .NET Framework 4.8 is available at <https://dotnet.microsoft.com/download/dotnet-framework/net48>.

Note:

As Microsoft has ended support for Windows7, WindowsServer2008 and 2008R2, upcoming releases of Workplace for Windows from 3.13 onwards will no longer support these operating systems. In addition, from 3.13, the click-to call browser extension will no longer be provided for the Internet Explorer web browser and Windows 8, Windows 8.1 operating systems also will not be supported.

Microsoft has ended Mainstream Support for Windows Server 2012 and Windows Server 2012 R2 as of October 2018. Due to benefits related to using modern Windows 10 APIs, upcoming releases of Workplace for Windows from 3.15 onwards will no longer support these operating systems.

Compatibility

For the latest and most accurate compatibility information, go to <https://support.avaya.com/CompatibilityMatrix/Index.aspx>.

Contacting support

Contact support checklist

If you are having trouble with an Avaya product, you should:

1. Retry the action. Carefully follow the instructions in written or online documentation.
2. Check the documentation that came with your hardware for maintenance or hardware-related problems.
3. Note the sequence of events that led to the problem and the exact messages displayed. Have the Avaya documentation available.

If you continue to have a problem, contact Avaya Technical Support:

4. Log in to the Avaya Technical Support Web site <https://support.avaya.com>.
5. Contact Avaya Technical Support at one of the telephone numbers in the Support Directory listings on the Avaya support Web site.

Avaya Global Services Escalation Management provides the means to escalate urgent service issues. For more information, see the Escalation Contacts listings on the Avaya Support site.

Contact support tasks

You may be asked to email one or more files to Technical Support for analysis of your application and its environment.

Avaya Workplace for Windows

Required artifacts for Avaya Workplace for Windows Release 3.21

The following section provides Avaya Workplace for Windows Release 3.21 downloading information. For installation and upgrade procedure, see documents mentioned in Installation and Upgrade note.

Client/Server	Artifact	Notes
Avaya Workplace for Windows	3.21.0.64	Date Available Aug 31, 2021

Required patches

For information about patches and product updates, see the Avaya Technical Support Web site <https://support.avaya.com>.

New Configuration Parameters


The following new configuration parameters have been added to the 3.21 release for Avaya Aura.

Description	Client UI setting name	Avaya Workplace Client Platform Support
LOCALLY_ENFORCE_PRIVACY_HEADER		
Setting to enable display of CPN Blocked call as 'Restricted' in localized language- This is aligned with J1xx phones 0: Responsibility for privacy is with the CM/SM, endpoint displays any Caller Id received in the Contact headers for CPN Blocked Calls (In general, CA shows Trunk Name)- This is default value 1: Responsibility for privacy is with the endpoint, so the endpoint displays the localized string "Restricted" when Incoming Invite has 'Privacy Header' for CPN Blocked Calls	No client UI	Windows only

For Avaya Workplace Client 3.21, the following JSON document is available: http://downloads.dlavaya.com/AvayaAuraDeviceServices/AvayaAuraDeviceServices_misc/20210831_dynamicConfigUpload.txt?fileExt=.txt&_dlmt_=1584654589_d8d6c9761e14e4712cd837a016a5ef4c which can be used to update Avaya Aura Device Services with new auto-configuration parameters supported in release 3.21.

Avaya Calling for Microsoft Teams

The Avaya Calling for Microsoft Teams makes use of the Avaya call application available in the Microsoft teams application store. The Avaya Call app provides contact information and dial pad within Microsoft teams. Users can click to dial from Microsoft teams with this solution. To have this setup users need to have the pre-requisites setup before logging into the Avaya Call app.

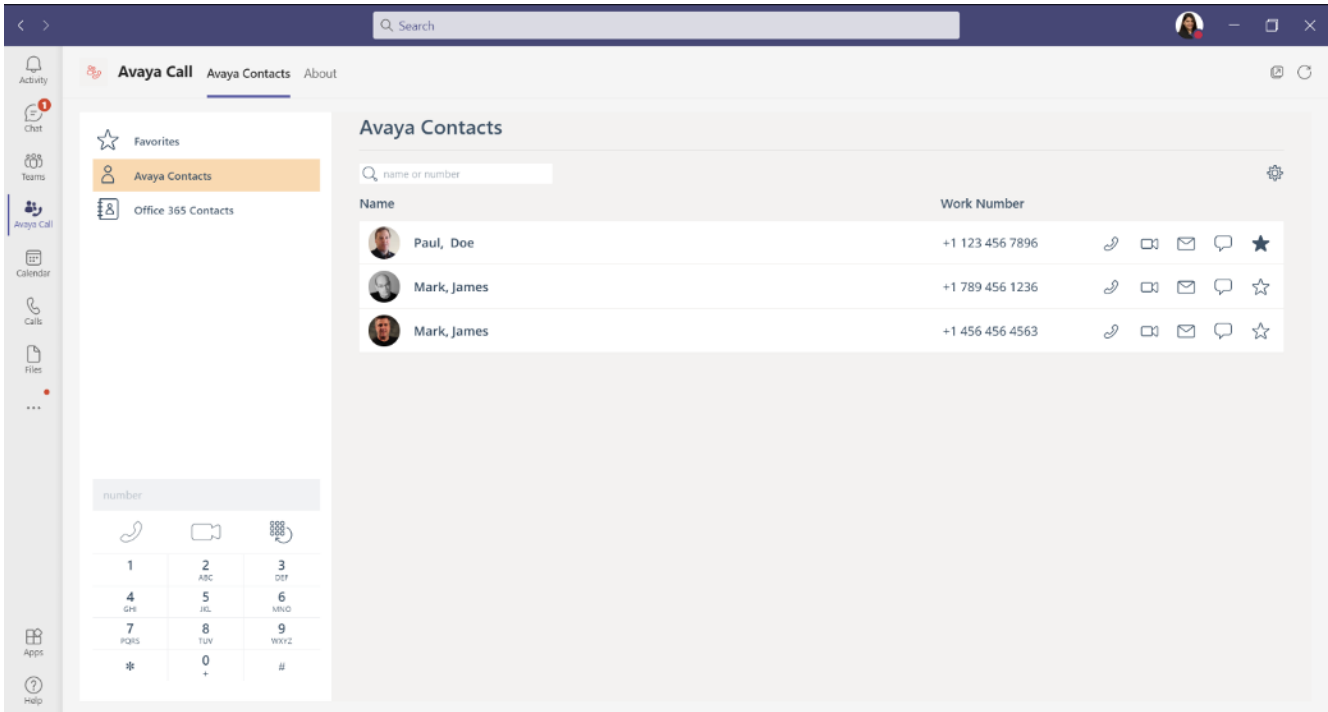

Product Release Matrix

Product Name	Release	Platforms Supported
Avaya Calling for Microsoft Teams	1.2	All Platforms

Note:

- Avaya Workplace Client (3.13 or above) must be installed.

What's new in Avaya Calling for Microsoft Teams

Release 1.2

The following features are provided with the Avaya Calling for Microsoft Teams release 1.2:

- Adding Contact through Enterprise Search and mark it as Favorite.
- Display additional contact numbers through the ellipsis or Display name or picture.
- Office 365 Contacts Enterprise Search.
- Option to disable video through Settings file
- Support for Danish, Norwegian and Swedish languages.
- Tooltips for better readability and accessibility.

Pre-Installation Requirements

The Avaya Calling for Microsoft Teams has the following pre-installation requirements –

- Avaya Aura Device Services 8.0.1 or above.
- Avaya Workplace Client installed.

Documentation & Localization

Avaya Documentation Center

Customer documentation for Avaya Workplace Client is now available on the Avaya Documentation Center at <http://documentation.avaya.com/>.

Guide	Link	Localized
Using Avaya Workplace Client for Android, iOS, Mac, and Windows	Using Avaya Workplace Client Android iOS Mac Windows	Yes
Avaya Workplace Client Quick Reference Guide	Avaya Workplace Client QRG	Yes
Planning for and Administering Avaya Workplace Client for Android, iOS, Mac, and Windows	Planning Administering Avaya Workplace Client Android iOS Mac Windows	No
Avaya Workplace Client Overview and Specification for Android, iOS, Mac, and Windows	Avaya Workplace Client Overview Specification Android iOS Mac Windows	No

These are links to the English versions of the document.

Localized versions of the above documents will be available post-GA in the following G14 languages:

- French
- Italian
- German
- Russian
- Simplified Chinese
- Japanese
- Korean
- Latin American Spanish
- Brazilian-Portuguese

Documentation errata

None

Localization

For the Avaya Workplace Client UI, the following languages are supported:

- English
- German
- French
- Lat-Spanish
- Italian
- Japanese
- Korean
- Brazilian-Portuguese
- Russian
- Simplified Chinese
- Czech
- Dutch
- Polish
- Swedish
- Danish
- Hungarian
- Norwegian
- Indonesian
- Turkish
- Traditional Chinese
- Malaysian
- Thai
- Hebrew
- Arabic (Windows only)

Troubleshooting the installation

Support for Avaya Workplace is available through Avaya Technical Support.

If you encounter trouble with Avaya Workplace:

1. Retry the action. Follow the instructions in written or online documentation carefully.
2. Check the documentation that came with your hardware for maintenance or hardware-related problems.
3. Note the sequence of events that led to the problem and the exact messages displayed. Have the Avaya documentation available.
4. If you continue to have a problem, contact Avaya Technical Support by:
 - a. Logging on to the Avaya Technical Support Web site <http://www.avaya.com/support>
 - b. Calling or faxing Avaya Technical Support at one of the telephone numbers in the Support Directory listings on the Avaya support Web site.

You may be asked to email one or more files to Technical Support for analysis of your application and its environment.

Note: If you have difficulty reaching Avaya Technical Support through the above URL or email address, go to <http://www.avaya.com> for further information.

When you request technical support, provide the following information:

- Configuration settings, including Avaya Workplace for Windows configuration and browser settings.
- Usage scenario, including all steps required to reproduce the issue.
- Screenshots, if the issue occurs in the Administration Application.
- Copies of all logs related to the issue.
- All other information that you gathered when you attempted to resolve the issue.

Tip: Avaya Global Services Escalation Management provides the means to escalate urgent service issues. For more information, see the Escalation Contacts listings on the Avaya Web site.

For information about patches and product updates, see the Avaya Technical Support Web site <https://support.avaya.com>.

Known issues and workarounds in Avaya Workplace for Windows Release 3.21 and Avaya Calling 1.2

The following table lists the known issues for this release:

ID	Minimum conditions	Visible symptoms	Workaround
ACW-22292	Workplace and MS Teams installed and logged. Log into Avaya Call using invalid credentials	When any new contact/updated/deleted from Workplace when the network is down, user would not see the updates in Avaya Call after network recovery.	Reload Avaya Call.
UCAPM-28732	Workplace and MS Teams installed and logged. Log into Avaya Call using invalid credentials	MS Teams pop-up appears to enter credentials. Though the user enters correct credentials in it, those won't be taken up and this pop-up keeps appearing after a few seconds of interval.	Logout of the MS Teams. (This will close the authentication pop up as well) and login back. Then log into Avaya Call Assistant with valid credentials.
ACW-22501	Workplace and MS Teams installed and logged in on Browser.	Avaya Call icon is not display when MS Teams-Avaya Call. This is known issues from MS for any custom apps.	None
ACW-21927	Workplace installed and conference in progress for long period (>30 mins) with video and full screen sharing.	After video is stopped, the roster is displayed as white with video icon at the bottom and video is not displayed	None
ACW-21938	CMS is integrated to CM. Activate Agent Trace for agent A in CMS Administration.	Blind transfer call is not reported with Transfer=y in Call Management System report.	None
ACW-21940	CMS is integrated to CM. Activate Agent Trace for agent A in CMS Administration.	Supervisor assist call is not reported as assist call in Call Management System	None
ACW-21530	Downgrading from 3.13 (or higher) versions to 3.12 (or lesser) versions	Users may experience their app crashes on startup. This issue only happens when downgrading. Upgrading from 3.12 (or lesser) versions to 3.13 or further versions is not expected to make the app crash.	Delete the local configuration file. The path to this file is - %APPDATA%\Avaya\Avaya IX Workplace\configdata.xml.
ACW-21033	Upgrade or fresh installation of client	All active Spaces conversation messages are displayed as unread.	Open each active conversation
ACW-21459	Customers deploying Aura 8.1.3 without taking an updated version of client	App crashes on launch	They need to upgrade client to 3.10
ACW-22737	Workplace logged in.	Users may experience "Check your auto-configuration credentials and try again" red triangle alert if	One of the supported services (Multimedia Messaging, Device Services, Exchange

ID	Minimum conditions	Visible symptoms	Workaround
		AUTOCONFIG_USESSO is 1 and this service is the only one which uses Unified credentials like a sing in mode. (All other services are configured to request Avaya Authorization or Manual credentials)	Calendar or My Meeting Room) should be configured to request Unified login to be signed in.
ACW-22737	Workplace in Deskphone mode do not work after admin changes SM profile from one SM to multiple on SMGR.	Calls do not ring on Workplace, only rings on Deskphone	None
ACW-23013	Workplace client is in Shared Control mode with Avaya Agent for Desktop.	Logout Override will not work	None.
ACW-23011	Workplace client is in Shared Control mode with Avaya Agent for Desktop.	User is unable to invoke Supervisor Assist Feature.	None.
ACW-23000	Workplace client is in Shared Control mode with Avaya Agent for Desktop and Service Observe configured.	Unable to change SO mode from Workplace Client (Windows) while on an Observed Call. Workplace client shows normal call card (non-SO), so user does not have the ability to change SO modes mid-call	None.
ACW-22999	Workplace client is in Shared Control mode with J1xx, and Service observe is configured.	SO call card, SO mode will disappear from WP after reconnecting network. User will not be able to continue observing the call with proper SO call appearance / SO mode / SO button / LED from Workplace.	User can observe it from J1xx.
CLIENTSDK-25800	During call switch from dual stacks network to IPv4 only network	Call drops when user moved from dual stack IPv6 to IPV4 only network.	None
ACW-23072	SM profile changes from SM1 -> SM2,SM1,SM3	Shared control mode gets disconnected between workplace and J1xx after changing SM profile of station from SM1 -> SM2, SM1,SM3	None
ACW-22957	Workplace is registered in Deskphone mode with J1xx / AAfD	UI Info button is greyed out after Network recovery	None
ACW-21197	Windows machine keyboard and Workplace Client are set to Arabic language	The entered digit message is cut off and not displayed the same as what the user typed.	None

ID	Minimum conditions	Visible symptoms	Workaround
ACW-21298	Font style/format apply by right click context menu	Font-format does not apply on typing.	Format the text after typing and before sending
ACW-20942	Windows version 1803 - System set as Arabic language	Languages not applied	Upgrade Windows to the current released version.

Fixes in Avaya Workplace for Windows Release 3.21 and Avaya Calling 1.2

The following table lists the fixes in this release:

ID	Minimum Conditions	Visible symptoms	Release found in
ACW-23163	Avaya Calling installed, try searching by Phone number in the Enterprise search for Avaya Contacts and Favorites	Enterprise contacts are not displayed in search result when user enter number with spaces on Avaya Calling.	1.2
ACW-22903	Avaya Calling installed.	Insufficient logging in Avaya Call App for O365 contact related issues and some of the failures.	1.2
ACW-22902	Avaya Calling installed, try searching with exact strings in the Local search for Avaya Contacts and Favorites	User needs to enter complete and exact string to get the contact	1.2
ACW-22819	Avaya Calling installed, try searching by Phone number in the Local search for Avaya Contacts and Favorites	Phone number search for local contacts only works with exact number format	1.1
ACW-22755	AAAD control Workplace client as media endpoint	Cannot make back-to-back calls using AAAD when Workplace is used as a Media Endpoint	3.21
ACW-22908	Private chat in Workplace conference call	Number of participant list displayed under Private chat menu is limited and not scrollable, so user cannot see all participants in the list to start private chat	3.21
ACW-22976	Avaya Browser extension in Chrome	On some webpages, Random numbers and dates are detected as telephone number when Avaya Browser extension for Chrome is used-	3.21
ACW-23057	Workplace client login with Shared control mode	Message displayed when user hover over the cursor on the moderator controls menu- Confusing user experience as the features are working, we should rather gray out the controls	3.21
ACW-23076	Configure Workplace clients with UNIFIED_PORTAL_SSO equal to 0 in the autoconfiguration	Unable to add Meeting Details after upgrade to 3.19 using Outlook Add-In meeting scheduler	3.21
ACW-23081	Workplace client registered in shared control mode with Team button configured	Team Buttons do not show with Feature Manager view in Deskphone Mode	3.21
ACW-23085	Chat notification comes in or the volume slider in the volume control is "touched" in the Workplace	Low volume on answering incoming calls on Workplace	3.21
ACW-23100	Screen pop up configured at Workplace client	Screen pop feature does not open the configured Application with detail path if space is not provided at last before line separator	3.21

ID	Minimum Conditions	Visible symptoms	Release found in
ACW-23128	Windows system set as default communication system	Workplace's sound lowered 80% as it is not identified as default communication system on Windows systems	3.21
ACW-23133	OAuth Access Token expiration timer is set to 180 days on AADS	During OAuth config, Workplace client crashes	3.21
ACW-23195	Workplace upgraded from 3.12 to 3.19	After upgrading the outlook plugin stopped working	3.21
ACW-23296	Workplace for Windows receive new incoming call while on ongoing call and have latest Windows 10 updates	Volume during call drops down automatically	3.21
ACW-23233	Workplace client 3.20 is installed	Continuous ringing tone could be still heard intermittently during established outgoing calls Ringing tone continue to play after the call is ended until client is closed	3.20
ACW-23191	Workplace client 3.20 is installed. BLA is configured	Ringing tone is not ended for call associated with Bridge Line Call Appearance once it is answered at remote device. Ringing tone stops playing once call is ended	3.20
ACW-23193	Workplace client 3.20 is installed	Continuous ringing tone could be still heard intermittently during established conference call	3.20
ACW-23070	Workplace installed with Outlook add-in.	Call button on outlook contact is not available.	3.19
ACW-22936	Workplace upgraded to 3.18	MWI does not lit up when user receive new voice message after upgrading Workplace to 3.18	3.18
ACW-22930	Workplace upgraded from 3.17 to 3.18.	Unable to select Client Identity certificate from the list as Client shows empty list of Client Identity certs.	3.18
ACW-22978	Workplace installed with Browser plugin.	Dialing 11 digits numbers does not work through Avaya Browser extension for click to dial with Japanese locale	3.18
ACW-22942	Workplace installed with Browser plugin.	Pop up for Click to dial number flickers and does not provide call option to the users intermittently	3.18
ACW-22987	Workplace installed with Browser plugin.	Click to dial from Browser plugin does not work for 11-digit Italian number	3.18
ACW-22977	Workplace installed and video call is escalated to conference with sharing.	After escalating P2P video call to MSS conference, video remains blocked, user has to unblock manually	3.18

ID	Minimum Conditions	Visible symptoms	Release found in
ACW-22974	Workplace installed with Outlook add-in.	Starting Outlook after installing Workplace with outlook Add-In takes longer time of almost 3 mins.	3.18
ACW-22899	Workplace installed and joined a conference call.	Slow typing experience when user types in AMM chat session while joined in a conference meeting	3.17
ACW-22776	Workplace installed EC500 configured.	Unable to answer incoming call from EC500 linked Mobile number, when user press Answer, call does not answer and goes to coverage	3.17
ACW-22879	Workplace installed with Outlook add-in.	Unable to dial Outlook Contacts via Workplace using 'Call Contact' option	3.17
ACW-23052	Workplace logged in through SBC and Call Walking feature enabled on SBC.	Call Walking feature of SBC stops registrations of Workplace SIP clients as Workplace sends REGISTER request after every 1 sec and so Call Walking feature do not allow clients to register.	3.16
ACW-22815	Workplace installed and PC is rebooted.	Users cannot answer first incoming call after PC is rebooted, user need to logout and re-login workplace to get and answer the call	3.16
ACW-22816	Workplace installed and manually log into the extension.	User is able to change SIP extension having same password	3.14
ACW-23033	Workplace installed.	Workplace sends non-empty portal name or Spaces login name to exchange though the services are disabled on reset and reconfigure	3.13
ACW-22961	<p>1. Configure Workplace in OTT mode with the following config:</p> <pre>SET APPLICATION_AUTO_START 0 SET UNIFIEDPORTALEENABLED 1 SET CONFERENCE_PORTAL_URI <conference_url> SET UNIFIED_PORTAL_SSO 1</pre> <p>2. Skip credentials for unified portal.</p>	Meeting Address is not populated on the Join Meeting screen if user is not a signed in user in OTT deployment	3.12

Appendix A: Acronyms

Acronym	Definition
3PCC	Third Party Call Control
AAC	Avaya Aura® Conferencing
AADS	Avaya Aura® Device Services
AAWG	Avaya Aura® Web Gateway
AEMO	Avaya Equinox® Meetings Online
AMM	Avaya Multimedia Messaging
APNS	Apple Push Notification Service
ASBCE	Avaya Session Border Controller for Enterprise
BLA	Bridged Line Appearance
CM	Avaya Aura® Communication Manager
EC500	Extension to Cellular
FP	Feature Pack
GA	Generally Available
IdP	Identity Provider
IM	Instant Message
IPv6	Internet Protocol version 6
IX	Intelligent Experience
LDAP	Lightweight Directory Access Protocol
MDA	Multiple Device Access
MSS	Multi-Stream Switching
OAUTH	Open Authorization
OTT	Over The Top
PLC	Packet Loss Concealment
POM	Presentation Only Mode
PS	Avaya Aura® Presence Services
SAML	Security Assertion Mark-up Language
SBC	Session Border Controller
SIP	Session Initiation Protocol
SM	Avaya Aura® Session Manager
SMGR	Avaya Aura® System Manager
SP	Service Pack
SRTP	Secure Real-Time Transport Protocol
SSO	Single Sign-On
TOM	Top of Mind
TLS	Transport Layer Security
UC	Unified Communication
URI	Uniform Resource Identifier
USB	Universal Serial Bus
VDI	Virtual Desktop Infrastructure