



# ***Avaya Workplace Client (Windows) Release Notes***

Release 3.29  
Issue 1.0  
Sep 2022

## Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

## Documentation disclaimer

“Documentation” means information published in varying mediums which may include product information, operating instructions and performance specifications that are generally made available to users of products. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of Documentation unless such modifications, additions, or deletions were performed by or on the express behalf of Avaya. End User agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

## Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or Documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

## Warranty

Avaya provides a limited warranty on Avaya hardware and software. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language, as well as information regarding support for this product while under warranty is available to Avaya customers and other parties through the Avaya Support website: <https://support.avaya.com/helpcenter/getGenericDetails?detailId=C20091120112456651010> under the link “Warranty & Product Lifecycle” or such successor site as designated by Avaya. Please note that if You acquired the product(s) from an authorized Avaya Channel Partner

outside of the United States and Canada, the warranty is provided to You by said Avaya Channel Partner and not by Avaya.

“**Hosted Service**” means an Avaya hosted service subscription that You acquire from either Avaya or an authorized Avaya Channel Partner (as applicable) and which is described further in Hosted SAS or other service description documentation regarding the applicable hosted service. If You purchase a Hosted Service subscription, the foregoing limited warranty may not apply but You may be entitled to support services in connection with the Hosted Service as described further in your service description documents for the applicable Hosted Service. Contact Avaya or Avaya Channel Partner (as applicable) for more information.

## Hosted Service

THE FOLLOWING APPLIES ONLY IF YOU PURCHASE AN AVAYA HOSTED SERVICE SUBSCRIPTION FROM AVAYA OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE), THE TERMS OF USE FOR HOSTED SERVICES ARE AVAILABLE ON THE AVAYA WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/LICENSEINFO) UNDER THE LINK “Avaya Terms of Use for Hosted Services” OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, AND ARE APPLICABLE TO ANYONE WHO ACCESSES OR USES THE HOSTED SERVICE. BY ACCESSING OR USING THE HOSTED SERVICE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE DOING SO (HEREINAFTER REFERRED TO INTERCHANGEABLY AS “YOU” AND “END USER”), AGREE TO THE TERMS OF USE. IF YOU ARE ACCEPTING THE TERMS OF USE ON BEHALF A COMPANY OR OTHER LEGAL ENTITY, YOU REPRESENT THAT YOU HAVE THE AUTHORITY TO BIND SUCH ENTITY TO THESE TERMS OF USE. IF YOU DO NOT HAVE SUCH AUTHORITY, OR IF YOU DO NOT WISH TO ACCEPT THESE TERMS OF USE, YOU MUST NOT ACCESS OR USE THE HOSTED SERVICE OR AUTHORIZE ANYONE TO ACCESS OR USE THE HOSTED SERVICE.

## Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, <https://support.avaya.com/LICENSEINFO>, UNDER THE LINK “AVAYA SOFTWARE LICENSE TERMS (Avaya Products)” OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM

AVAYA INC., ANY AVAYA AFFILIATE, OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AVAYA CHANNEL PARTNER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA CHANNEL PARTNER; AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE ("AVAYA").

Avaya grants You a license within the scope of the license types described below, with the exception of Heritage Nortel Software, for which the scope of the license is detailed below. Where the order documentation does not expressly identify a license type, the applicable license will be a Designated System License. The applicable number of licenses and units of capacity for which the license is granted will be one (1), unless a different number of licenses or units of capacity is specified in the documentation or other materials available to You. "Software" means computer programs in object code, provided by Avaya or an Avaya Channel Partner, whether as stand-alone products, pre-installed on hardware products, and any upgrades, updates, patches, bug fixes, or modified versions thereto. "Designated Processor" means a single stand-alone computing device. "Server" means a Designated Processor that hosts a software application to be accessed by multiple users. "Instance" means a single copy of the Software executing at a particular time: (i) on one physical machine; or (ii) on one deployed software virtual machine ("VM") or similar deployment.

### License types

**Concurrent User License (CU).** End User may install and use the Software on multiple Designated Processors or one or more Servers, so long as only the licensed number of Units are accessing and using the Software at any given time as indicated in the order, Documentation, or as authorized by Avaya in writing. A "Unit" means the unit on which Avaya, at its sole discretion, bases the

pricing of its licenses and can be, without limitation, an agent, port or user, an e-mail or voice mail account in the name of a person or corporate function (e.g., webmaster or helpdesk), or a directory entry in the administrative database utilized by the Software that permits one user to interface with the Software. Units may be linked to a specific, identified Server or an Instance of the Software.

### Heritage Nortel Software

"Heritage Nortel Software" means the software that was acquired by Avaya as part of its purchase of the Nortel Enterprise Solutions Business in December 2009. The Heritage Nortel Software is the software contained within the list of Heritage Nortel Products located at <https://support.avaya.com/LicenseInfo/> under the link "Heritage Nortel Products," or such successor site as designated by Avaya. For Heritage Nortel Software, Avaya grants Customer a license to use Heritage Nortel Software provided hereunder solely to the extent of the authorized activation or authorized usage level, solely for the purpose specified in the Documentation, and solely as embedded in, for execution on, or for communication with Avaya equipment. Charges for Heritage Nortel Software may be based on extent of activation or use authorized as specified in an order or invoice.

### Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, Hosted Service, or hardware provided by Avaya. All content on this site, the documentation, Hosted Service, and the product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, and or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

### Virtualization

The following applies if the product is deployed on a virtual machine. Each product has its own ordering code and license types. Note that each Instance of a product must be separately licensed and ordered. For example, if the end user customer or Avaya Channel Partner would like to

install two Instances of the same type of products, then two products of that type must be ordered.

### **Third Party Components**

“**Third Party Components**” mean certain software programs or portions thereof included in the Software or Hosted Service may contain software (including open source software) distributed under third party agreements (“Third Party Components”), which contain terms regarding the rights to use certain portions of the Software (“Third Party Terms”). As required, information regarding distributed Linux OS source code (for those products that have distributed Linux OS source code) and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply is available in the products, Documentation or on Avaya’s website at: <https://support.avaya.com/Copyright> or such successor site as designated by Avaya. The open source software license terms provided as Third Party Terms are consistent with the license rights granted in these Software License Terms, and may contain additional rights benefiting You, such as modification and distribution of the open source software. The Third Party Terms shall take precedence over these Software License Terms, solely with respect to the applicable Third Party Components, to the extent that these Software License Terms impose greater restrictions on You than the applicable Third Party Terms.

The following applies only if the H.264 (AVC) codec is distributed with the product. THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD (“AVC VIDEO”) AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE <HTTP://WWW.MPEGLA.COM>

### **Service Provider**

THE FOLLOWING APPLIES TO AVAYA CHANNEL PARTNER’S HOSTING OF AVAYA PRODUCTS OR SERVICES. THE PRODUCT OR HOSTED SERVICE MAY USE THIRD PARTY COMPONENTS SUBJECT TO THIRD PARTY TERMS AND REQUIRE A SERVICE PROVIDER TO BE INDEPENDENTLY LICENSED DIRECTLY FROM THE THIRD PARTY SUPPLIER. AN AVAYA CHANNEL PARTNER’S HOSTING OF AVAYA PRODUCTS MUST BE AUTHORIZED IN WRITING BY AVAYA AND IF THOSE HOSTED PRODUCTS USE OR

EMBED CERTAIN THIRD PARTY SOFTWARE, INCLUDING BUT NOT LIMITED TO MICROSOFT SOFTWARE OR CODECS, THE AVAYA CHANNEL PARTNER IS REQUIRED TO INDEPENDENTLY OBTAIN ANY APPLICABLE LICENSE AGREEMENTS, AT THE AVAYA CHANNEL PARTNER’S EXPENSE, DIRECTLY FROM THE APPLICABLE THIRD PARTY SUPPLIER.

WITH RESPECT TO CODECS, IF THE AVAYA CHANNEL PARTNER IS HOSTING ANY PRODUCTS THAT USE OR EMBED THE G.729 CODEC, H.264 CODEC, OR H.265 CODEC, THE AVAYA CHANNEL PARTNER ACKNOWLEDGES AND AGREES THE AVAYA CHANNEL PARTNER IS RESPONSIBLE FOR ANY AND ALL RELATED FEES AND/OR ROYALTIES. THE G.729 CODEC IS LICENSED BY SIPRO LAB TELECOM INC. SEE <WWW.SIPRO.COM/CONTACT.HTML>. THE H.264 (AVC) CODEC IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO: (I) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD (“AVC VIDEO”) AND/OR (II) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION FOR H.264 (AVC) AND H.265 (HEVC) CODECS MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE <HTTP://WWW.MPEGLA.COM>.

### **Compliance with Laws**

You acknowledge and agree that it is Your responsibility for complying with any applicable laws and regulations, including, but not limited to laws and regulations related to call recording, data privacy, intellectual property, trade secret, fraud, and music performance rights, in the country or territory where the Avaya product is used.

### **Preventing Toll Fraud**

“Toll Fraud” is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company’s behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

### **Avaya Toll Fraud intervention**

If You suspect that You are being victimized by Toll Fraud and You need technical assistance or support, call Technical Service Center Toll Fraud Intervention Hotline at

+1-800-643-2353 for the United States and Canada. For additional support telephone numbers, see the Avaya Support website: <https://support.avaya.com>, or such successor site as designated by Avaya.

### **Security Vulnerabilities**

Information about Avaya's security support policies can be found in the Security Policies and Support section of <https://support.avaya.com/security>

Suspected Avaya product security vulnerabilities are handled per the Avaya Product Security Support Flow (<https://support.avaya.com/css/P8/documents/100161515>).

### **Downloading Documentation**

For the most current versions of Documentation, see the Avaya Support website: <https://support.avaya.com>, or such successor site as designated by Avaya.

### **Contact Avaya Support**

See the Avaya Support website: <https://support.avaya.com> for product or Hosted Service notices and articles, or to report a problem with your Avaya product or Hosted Service. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: <https://support.avaya.com/> (or such successor site as designated by Avaya), scroll to the bottom of the page, and select Contact Avaya Support.

### **Trademarks**

The trademarks, logos and service marks ("Marks") displayed in this site, the Documentation, Hosted Service(s), and product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its affiliates, its licensors, its suppliers, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the Documentation, Hosted Service(s) and product(s) should be construed as granting, by implication, estoppel, or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party.

Avaya is a registered trademark of Avaya Inc.

All non-Avaya trademarks are the property of their respective owners.

Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

# Contents

Change history.....	7
Introduction.....	7
Documentation Catalog .....	7
Product Release Matrix.....	7
What's new in Avaya Workplace for Windows .....	8
Release 3.29.....	8
Release 3.28.....	8
Release 3.27.1 .....	8
Release 3.27.....	8
Installation.....	8
Pre-Installation Requirements .....	8
Compatibility .....	9
Contacting support.....	9
Contact support checklist .....	9
Contact support tasks.....	9
Avaya Workplace for Windows .....	10
Required artifacts for Avaya Workplace for Windows Release 3.29.....	10
Required patches.....	10
New Configuration Parameters .....	10
Avaya Calling for Microsoft Teams .....	10
Product Release Matrix .....	11
What's new in Avaya Calling for Microsoft Teams .....	11
Release 1.2.1 .....	11
Release 1.2 .....	11
Pre-Installation Requirements .....	12
Documentation & Localization .....	12
Avaya Documentation Center .....	12
Documentation errata.....	13
Localization .....	13
Troubleshooting the installation.....	13
Known issues and workarounds in Avaya Workplace for Windows Release 3.29 and Avaya Calling 1.2 .....	14
Fixes in Avaya Workplace for Windows Release 3.29 and Avaya Calling 1.2 .....	16
Appendix A: Acronyms.....	22

## Change history

Issue	Date	Description
1.0	09/02/2022	3.29 GA issue for the Avaya Workplace Windows Client.
1.0	07/28/2022	3.28 GA issue for the Avaya Workplace Windows Client.
1.0	06/27/2022	3.27.1 GA issue for the Avaya Workplace Windows Client.
1.0	06/07/2022	3.27 GA issue for the Avaya Workplace Windows Client.

## Introduction

This document provides late-breaking information to supplement the Avaya Workplace Windows Client 3.29 software and documentation. For updated documentation, product support notices, and service pack information, go to the Avaya Support site at <http://support.avaya.com>.

Please refer to the latest Avaya Aura® 8.1.3.x / 10.1.x Release Notes for information specific to the Avaya Aura® feature and service packs.

## Documentation Catalog

The Documentation Catalog document lists down the various guides that are available for the Avaya Aura® solution. For details see <https://downloads.avaya.com/css/P8/documents/101050513>

## Product Release Matrix

Product Name	Release
Avaya Workplace for Windows	3.29.0.54
Avaya Workplace for MacOS	3.29.0.54
Avaya Workplace for Android	3.29.0.54
Avaya Workplace for iOS	3.29.0.54

# What's new in Avaya Workplace for Windows

## Release 3.29

In addition to bug fixes, the following new features are provided with the 3.29 release:

- Video Background Blur and Image Replacement
- Support for TLS 1.3

## Release 3.28

In addition to bug fixes, the following new features are provided with the 3.28 release:

- Middle Name Support for Outlook Contacts
- Avaya Contact Center Elite VuStats (This Computer Audio Mode Only)
- Support for Launching GoToMeeting from Top-of-Mind Calendar
- Software Context Updates: Reactive Libraries
- Avaya Contact Center Elite Service Observe Action from Contacts/Favorites/Search Results
- Paired Sign-On between Workplace Remote and Local Session (Citrix)
- Clickable URL Support for Enhanced Screen Pop
- Simplified Home screen Layout Option
- Feature "Desktop Audio Updates: sync volume and reflect system mute" introduced in 3.26 release was removed.

## Release 3.27.1

- Paired Sign-On Fixes for use with Workplace VDI.
- Third-Party Call Control outgoing call fixes.

## Release 3.27

In addition to bug fixes, the following new features are provided with the 3.27 release:

- User control for enabling/disabling Ec500 SIM RING feature when Other Phone Mode is selected
- Agent State Timers
- Support Greeting Type 'ANI'- Automatic Number Identification
- Paired Sign-On between Workplace Remote and Local Session (VMWare Horizon)
- Support the ability to receive Avaya Spaces group direct messages

## Installation

### Pre-Installation Requirements

In order to install the Avaya Workplace Windows Client on your Windows device, you need to have the Microsoft .NET Framework version 4.8 installed. The download link for .NET Framework 4.8 is available at <https://dotnet.microsoft.com/download/dotnet-framework/net48>.

Note:

As Microsoft has ended support for Windows7, WindowsServer2008 and 2008R2, upcoming releases of Workplace for Windows from 3.13 onwards will no longer support these operating systems. In addition, from 3.13, the click-to call browser extension will no longer be provided for the Internet Explorer web browser and Windows 8, Windows 8.1 operating systems also will not be supported.



Microsoft has ended Mainstream Support for Windows Server 2012 and Windows Server 2012 R2 as of October 2018. Due to benefits related to using modern Windows 10 APIs, upcoming releases of Workplace for Windows from 3.15 onwards will no longer support these operating systems.

## Compatibility

For the latest and most accurate compatibility information, go to <https://support.avaya.com/CompatibilityMatrix/Index.aspx>.

## Contacting support

### Contact support checklist

If you are having trouble with an Avaya product, you should:

1. Retry the action. Carefully follow the instructions in written or online documentation.
2. Check the documentation that came with your hardware for maintenance or hardware-related problems.
3. Note the sequence of events that led to the problem and the exact messages displayed. Have the Avaya documentation available.

If you continue to have a problem, contact Avaya Technical Support:

4. Log in to the Avaya Technical Support Web site <https://support.avaya.com>.
5. Contact Avaya Technical Support at one of the telephone numbers in the Support Directory listings on the Avaya support Web site.

Avaya Global Services Escalation Management provides the means to escalate urgent service issues. For more information, see the Escalation Contacts listings on the Avaya Support site.

### Contact support tasks

You may be asked to email one or more files to Technical Support for analysis of your application and its environment.

# Avaya Workplace for Windows

## Required artifacts for Avaya Workplace for Windows Release 3.29

The following section provides Avaya Workplace for Windows Release 3.29 downloading information. For installation and upgrade procedure, see documents mentioned in Installation and Upgrade note.

Client/Server	Artifact	Notes
Avaya Workplace for Windows	3.29.0.54	Date Available: Sep 02, 2022

## Required patches

For information about patches and product updates, see the Avaya Technical Support Web site <https://support.avaya.com>.

## New Configuration Parameters


The following new configuration parameters have been added to the 3.29 release for Avaya Aura.

Description	Client setting name	UI	Avaya Workplace Client Platform Support
<b>VIDEO_BACKGROUND_ENABLED</b>			
Property to define whether video background privacy (blur/image) is enabled or keep actual background in video calls.  Default value: 0	Settings> User Preferences >Audio/ Video> Virtual Background		Windows
<b>VIDEO_BACKGROUND_URL</b>			
Property to define which video background image to be used from specific URL location  Default value: Blank	No client UI		Windows

For Avaya Workplace Client 3.29, the following JSON document is available: [http://downloads.dlavaya.com/AvayaAuraDeviceServices/AvayaAuraDeviceServices\\_misc/20220830\\_dynamicConfigUpload.txt?fileExt=.txt&dlmt=1584654589\\_d8d6c9761e14e4712cd837a016a5ef4c](http://downloads.dlavaya.com/AvayaAuraDeviceServices/AvayaAuraDeviceServices_misc/20220830_dynamicConfigUpload.txt?fileExt=.txt&dlmt=1584654589_d8d6c9761e14e4712cd837a016a5ef4c) which can be used to update Avaya Aura Device Services with new auto-configuration parameters supported in release 3.29.

## Avaya Calling for Microsoft Teams

The Avaya Calling for Microsoft Teams makes use of the Avaya call application available in the Microsoft teams application store. The Avaya Call app provides contact information and dial pad within Microsoft teams. Users can click to dial from Microsoft teams with this solution. To have this setup users need to have the pre-requisites setup before logging into the Avaya Call app.

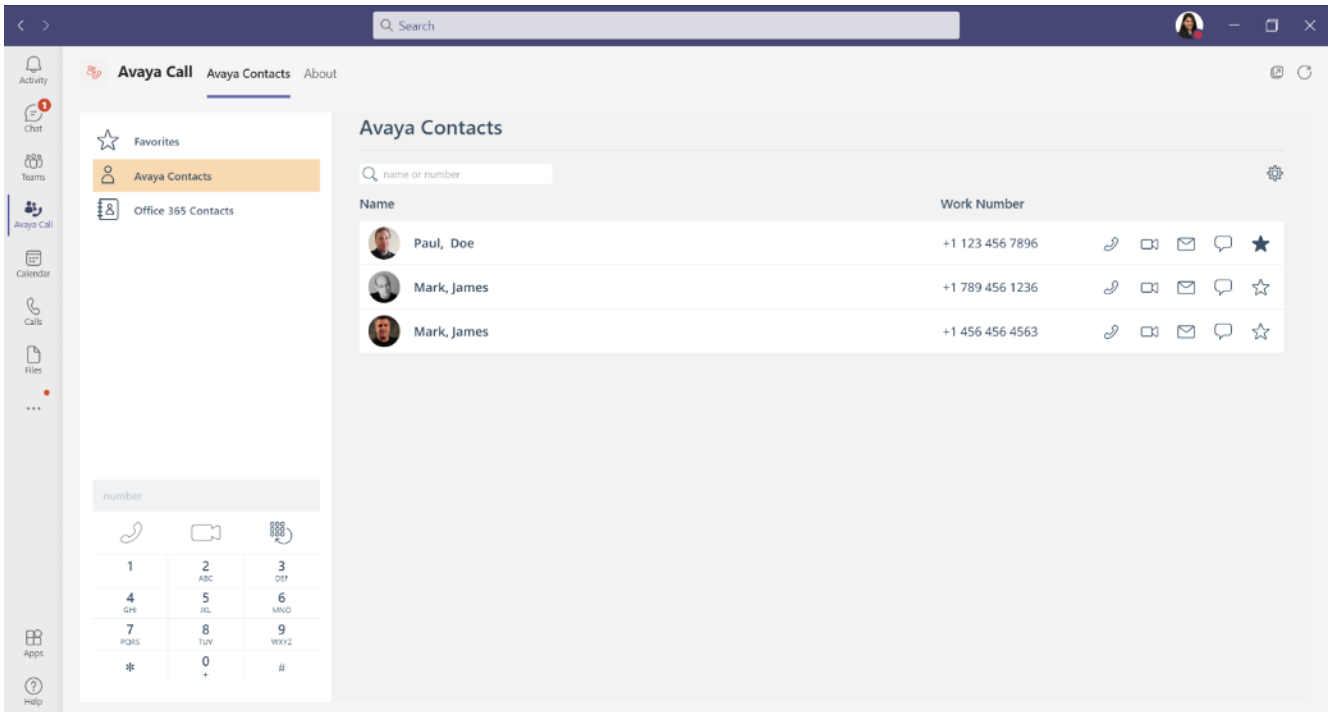

## Product Release Matrix

Product Name	Release	About Screen Version	Platforms Supported
Avaya Calling for Microsoft Teams	1.2.1	1.0.12	All Platforms

**Note:** *The About screen on the application will display the version as 1.0.12. It is the Microsoft Teams manifest file version and corresponds to the current version of Avaya Calling Application.*

## What's new in Avaya Calling for Microsoft Teams

### Release 1.2.1

The following features are provided with the Avaya Calling for Microsoft Teams release 1.2.1:

- Support for Traditional Chinese language.

### Release 1.2

The following features are provided with the Avaya Calling for Microsoft Teams release 1.2:

- Adding Contact through Enterprise Search and mark it as Favourite.
- Display additional contact numbers through the ellipsis or Display name or picture.
- Office 365 Contacts Enterprise Search.

- Option to disable video through Settings file
- Support for Danish, Norwegian and Swedish languages.
- Tooltips for better readability and accessibility.

## Pre-Installation Requirements

The Avaya Calling for Microsoft Teams has the following pre-installation requirements –

- Avaya Aura Device Services 8.0.1 or above.
- Avaya Workplace Client (3.13 or above) installed.

## Documentation & Localization

### Avaya Documentation Center

Customer documentation for Avaya Workplace Client is now available on the Avaya Documentation Center at <http://documentation.avaya.com/>.

Guide	Link	Localized
<b>Using Avaya Workplace Client for Android, iOS, Mac, and Windows</b>	<a href="#">Using Avaya Workplace Client Android iOS Mac Windows</a>	Yes
<b>Avaya Workplace Client Quick Reference Guide</b>	<a href="#">Avaya Workplace Client QRG</a>	Yes
<b>Planning for and Administering Avaya Workplace Client for Android, iOS, Mac, and Windows</b>	<a href="#">Planning Administering Avaya Workplace Client Android iOS Mac Windows</a>	No
<b>Avaya Workplace Client Overview and Specification for Android, iOS, Mac, and Windows</b>	<a href="#">Avaya Workplace Client Overview Specification Android iOS Mac Windows</a>	No

These are links to the English versions of the document.

Localized versions of the above documents will be available post-GA in the following G14 languages:

- French
- Italian
- German
- Russian
- Simplified Chinese
- Japanese
- Korean
- Latin American Spanish
- Brazilian-Portuguese

## Documentation errata

None

## Localization

For the Avaya Workplace Client UI, the following languages are supported:

- English
- German
- French
- Lat-Spanish
- Italian
- Japanese
- Korean
- Brazilian-Portuguese
- Russian
- Simplified Chinese
- Czech
- Dutch
- Polish
- Swedish
- Danish
- Hungarian
- Norwegian
- Indonesian
- Turkish
- Traditional Chinese
- Malaysian
- Thai
- Hebrew
- Arabic (Windows only)

## Troubleshooting the installation

Support for Avaya Workplace is available through Avaya Technical Support.

If you encounter trouble with Avaya Workplace:

1. Retry the action. Follow the instructions in written or online documentation carefully.
2. Check the documentation that came with your hardware for maintenance or hardware-related problems.
3. Note the sequence of events that led to the problem and the exact messages displayed. Have the Avaya documentation available.
4. If you continue to have a problem, contact Avaya Technical Support by:
  - a. Logging on to the Avaya Technical Support Web site <http://www.avaya.com/support>
  - b. Calling or faxing Avaya Technical Support at one of the telephone numbers in the Support Directory

listings on the Avaya support Web site.

You may be asked to email one or more files to Technical Support for analysis of your application and its environment.

**Note:** If you have difficulty reaching Avaya Technical Support through the above URL or email address, go to <http://www.avaya.com> for further information.

When you request technical support, provide the following information:

- Configuration settings, including Avaya Workplace for Windows configuration and browser settings.
- Usage scenario, including all steps required to reproduce the issue.
- Screenshots, if the issue occurs in the Administration Application.
- Copies of all logs related to the issue.
- All other information that you gathered when you attempted to resolve the issue.

**Tip:** Avaya Global Services Escalation Management provides the means to escalate urgent service issues. For more information, see the Escalation Contacts listings on the Avaya Web site.

For information about patches and product updates, see the Avaya Technical Support Web site <https://support.avaya.com>.

## Known issues and workarounds in Avaya Workplace for Windows Release 3.29 and Avaya Calling 1.2

The following table lists the known issues for this release:

ID	Minimum conditions	Visible symptoms	Workaround
<b>ACW-24230</b>	Workplace client for Windows 3.29 installed, the user resets the application and configures a different account in the same environment	The user will not be prompted with an authentication browser window, if the user has previously been signed in with Cloud, OAuth and Microsoft Modern accounts. The cached data will be used	Clean <localAppData>\Avaya\Avaya IX Workplace\WindowsFormsWebView2 folder.
<b>ACW-24126</b>	Workplace client for Windows 3.29 installed. The client identity certificate that is configured for the client has a non-exportable private key stored and accessible through Windows Cryptographic Service Providers (CSP) or Smart Card device.	After upgrading to 3.29 release of Workplace client, the application presents an error that the connection to the service(s) which requires the client certificate is lost.	<ol style="list-style-type: none"> <li>1. Re-import the certificate to have an exportable private key. For example, when importing a PFX with a certificate and a private key, check "Mark this key as exportable" checkbox in Windows Certificate Import Wizard.</li> <li>Note: this workaround is not applicable for Smart Card devices.</li> <li>2. Use the FIPS-enabled release of the Workplace client. It requires fresh installation. It has different set of default configuration values in comparison with common Workplace Client releases. Avaya is working on documentation to provide customers with more details and recommendations on deploying FIPS-enabled release of Workplace client.</li> </ol>
<b>ACW-24123</b>	Upgrade occurred from Avaya Workplace client for Windows 3.26.	When user unmute the speaker device in the same way using Windows Volume Controls or keypad,	<p>User needs to unmute the Workplace client application in Windows Volume Mixer once.</p> <p>To open the volume mixer, navigate to the taskbar and right click on speaker icon. In the opened</p>

ID	Minimum conditions	Visible symptoms	Workaround
	<p>When Workplace client 3.26 was installed and closed before the upgrade, user has muted a speaker device using Windows Volume Controls or keypad.</p> <p>This issue is not reproducible for upgrade from release 3.25 or below to 3.26.2 release directly.</p>	<p>playback from Workplace client is still muted in Windows.</p> <p>User is not able to hear audio notifications from Workplace or remote participant(s) when a call is established.</p>	<p>menu select "Open Volume Mixer", find Workplace application and click unmute.</p>
<b>Not Applicable</b>	<p>Workplace 3.26 installed with VDIENV=1 on a VMware Horizon virtual desktop. Workplace VDI is configured and running on the local desktop.</p>	<p>Launching Workplace on the virtual desktop fails to perform paired sign-in of the Workplace VDI application running on the local desktop.</p>	<p>Remain on Workplace 3.25 or earlier, or manually sign into Workplace VDI as required.</p>
<b>ACW-23011</b>	<p>Workplace client is in Shared Control mode with Avaya Agent for Desktop.</p>	<p>User is unable to invoke Supervisor Assist Feature.</p>	<p>None.</p>
<b>ACW-23000</b>	<p>Workplace client is in Shared Control mode with Avaya Agent for Desktop and Service Observe configured.</p>	<p>Unable to change SO mode from Workplace Client (Windows) while on an Observed Call. Workplace client shows normal call card (non-SO), so user does not have the ability to change SO modes mid-call</p>	<p>None.</p>
<b>ACW-22999</b>	<p>Workplace client is in Shared Control mode with J1xx, and Service observe is configured.</p>	<p>SO call card, SO mode will disappear from WP after reconnecting network. User will not be able to continue observing the call with proper SO call appearance / SO mode / SO button / LED from Workplace.</p>	<p>User can observe it from J1xx.</p>
<b>CLIENTSDK-25800</b>	<p>During call switch from dual stacks network to IPv4 only network</p>	<p>Call drops when user moved from dual stack IPv6 to IPV4 only network.</p>	<p>None</p>

ID	Minimum conditions	Visible symptoms	Workaround
<b>ACW-22957</b>	Workplace is registered in Deskphone mode with J1xx / AAfD	UI Info button is greyed out after Network recovery	None
<b>ACW-21197</b>	Windows machine keyboard and Workplace Client are set to Arabic language	The entered digit message is cut off and not displayed the same as what the user typed.	None
<b>ACW-21298</b>	Font style/format apply by right click context menu	Font-format does not apply on typing.	Format the text after typing and before sending
<b>ACW-20942</b>	Windows version 1803 - System set as Arabic language	Languages not applied	Upgrade Windows to the current released version.
<b>ACW-22292</b>	Workplace and MS Teams installed and logged. Log into Avaya Call using invalid credentials	When any new contact/updated/deleted from Workplace when the network is down, user would not see the updates in Avaya Call after network recovery.	Reload Avaya Call.
<b>UCAPM-28732</b>	Workplace and MS Teams installed and logged. Log into Avaya Call using invalid credentials	MS Teams pop-up appears to enter credentials. Though the user enters correct credentials in it, those won't be taken up and this pop-up keeps appearing after a few seconds of interval.	Logout of the MS Teams. (This will close the authentication pop up as well) and login back. Then log into Avaya Call Assistant with valid credentials.
<b>ACW-22501</b>	Workplace and MS Teams installed and logged in on Browser.	Avaya Call icon is not display when MS Teams-Avaya Call. This is known issues from MS for any custom apps.	None

### Fixes in Avaya Workplace for Windows Release 3.29 and Avaya Calling 1.2

The following table lists the fixes in this release:

ID	Minimum Conditions	Visible symptoms	Release found in
<b>ACW-24081</b>	Avaya Workplace for Windows installed and uses multiple monitors	BFCP sharing of portion of screen does not work when Workplace user uses multiple monitors	3.26



ID	Minimum Conditions	Visible symptoms	Release found in
ACW-24097	Avaya Workplace for Windows installed and on call does blind transfer	ASAI UII information do not send from Workplace after Workplace user blind transfer the original call	3.25
ACW-24188	Avaya Workplace for Windows installed and on call does blind transfer uses OAUTH credentials for AADS	Workplace hangs intermittently when starting app after few day's idle period, issue may be due to refresh token for OAuth has expired	3.27
ACW-24094	Avaya Workplace for Windows installed	ENABLE_BLA_NO_RING_CALL_NOTIFICATIONS should be supported on Windows	3.27
ACW-24166	Documentation	Need clarify in Admin and Using documents to specify 'Web Deployments requires admin password', to install software, privileges are required	3.26
ACW-24090	Avaya Workplace for Windows installed and uses Internet Explorer 11 for OAUTH	PING OAuth SSO fails when IE 11 is installed on the system	3.26
ACW-24071	Avaya Workplace for Windows installed Windows system shutdown and start 2 to 3 times	Unable to launch Workplace automatically (auto start enabled) if the Windows system shutdown and start 2 to 3 times	3.26
ACW-23959	Avaya Workplace for Windows installed and uses multiple monitors and scaling are different	Workplace Windows is shifted out of screen if previously connected second monitor is removed. Issue is reproducible only when scaling for two monitors are different	3.25
ACW-23936	Avaya Workplace for Windows installed and on call does transfer and dial PSTN number	Transfer failed from Workplace after receiving PAI header in 'Refer-To' request	3.25
ACW-23968	Avaya Workplace for Windows installed with Avaya Outlook plugin	An internal error displayed when user tries to login Avaya Outlook plugin with Workplace	3.25
ACW-23885	Avaya Workplace for Windows installed and uses multiple monitors and scaling are different	After a restart of the application, the head of the app is out-of-screen and a bit moved towards the left.	3.24
ACW-24082	Avaya Workplace for Windows installed	Unable to set ringtones with config parameter	3.24
ACW-24127	Avaya Workplace client for Windows with Workplace VDI client with Telecommuter mode	Using telecommuter mode in VDI environment results in Virtual Desktop error being displayed	3.26
ACW-24005	Avaya Workplace for Windows installed and receives a call via call forwarding	Call Forwarding Indication is not displayed on Incoming call notification and Call history when caller is added as a Workplace contact	3.26
ACW-24045	Avaya Workplace for Windows installed and on video call	Unable to share screen during video call with BFCP	3.26
ACW-24020	Avaya Workplace for Windows installed and behind SBC	Avaya SBC is highly loaded due to amount of CRLF requests from Workplace clients when there is high amount of active SIP registrations.	3.26
ACW-23987	Avaya Workplace for Windows installed	Unable to update 'ENABLE_LOCAL_CONTACT' setting from AADS in Workplace	3.25

ID	Minimum Conditions	Visible symptoms	Release found in
ACW-23962	Avaya Workplace for Windows installed with Outlook plug-in	Join button for Outlook meetings on the plugin does not work with Workplace Windows	3.25
ACW-23960	Avaya Workplace for Windows installed with Browser add-in	Browser add-in does not disabled in MS Edge IE compatibility mode when it is disabled in Workplace App. Plugin should also not install in IE as it is not supported	3.25
ACW-23790	Avaya Workplace for Windows installed	Workplace crashed during video conference, reproducible for one user	3.24
ACW-24006	Avaya Workplace for Windows installed	Enhance Call forwarding for all calls with External number fails when user try to invoke the feature with ARS FAC	3.24
ACW-23834	Avaya Workplace for Windows installed	Participants on roster are displayed in grayed out state after joining conference	3.24
ACW-24013	Avaya Workplace for Windows installed	Workplace reject the Re-Invite with 488 Not Acceptable here when user joins meeting thru IVR	3.24
ACW-23981	Avaya Workplace for Windows installed	Unable to use One Touch Recording (Audix-Rec) feature with Workplace	3.23
ACW-23780	Avaya Workplace for Windows installed	Echo heard from Workplace user when it is used on different hardware/surface and with internal Mic/Speaker selected by user	3.21
ACW-23914	Avaya Workplace for Windows installed	One- touch recording (audix-rec) does not work with Workplace and IXM	3.21
ACW-23920	Avaya Workplace for Windows installed	Workplace shows 'Call history could not be updated' error after network disruption	3.21
ACW-24062	Avaya Workplace client for Windows with Workplace VDI client	Paired Sign-On with Workplace VDI stopped working after Workplace upgrade from 3.23.1 to 3.26	3.26
ACW-24014	Avaya Workplace for Windows installed in CTI deployment	Outgoing calls from Workplace dialed through CTI Client (3PCC) fails intermittently	3.25
ACW-24033	Avaya Workplace for Windows installed	Workplace logs are written in wrong folder	3.23
ACW-23887	Avaya Workplace for Windows installed and APPLICATION_SCREEN_POP_LIST value set to blank	Workplace performs the SIPLOGIN action with the APPLICATION_SCREEN_POP_LIST value set to blank	3.25
ACW-23895	Avaya Workplace for Windows installed	Invalid SDP with 200 OK answer from Workplace, when SIP reachability feature is enabled on CM and CM sends OPTIONS message after every 5 min	3.25
ACW-23903	Avaya Workplace for Windows installed	Presence note set by user is not working in Workplace	3.25
ACW-23836	Avaya Workplace for Windows installed	Comm Profile password changed on SMGR, after this when Workplace login, user see error 'User Already created' on client	3.24

ID	Minimum Conditions	Visible symptoms	Release found in
ACW-23796	Avaya Workplace for Windows installed	Cannot parse 200 OK on Workplace from certain specific numbers	3.24
ACW-23826	Avaya Workplace for Windows installed	Workplace cannot reconnect to the Network after moving from external to internal network, previously connection from external network thru SBC was not configured for Workplace user-agent	3.23
ACW-22929	Avaya Workplace for Windows installed	Workplace does not send registration request if user tries to login by entering wrong password first and then correct password	3.18
ACW-23060	Avaya Workplace for Windows installed	VoIP service is not recovered when DSL Link is re-established next working day	3.17
ACW-23802	Avaya Workplace for Windows installed	IM messages sent from Workplace user with special character or new line character did not successful, user has to again send these messages for successful conversation	3.13
ACW-23589	Avaya Workplace for Windows installed	CMS reporting of Agent show Aux (defined reason code) instead Aux (0) which is default when agent set Aux and makes an outgoing call- Issue is due to design of Workplace client not supporting Off Hook invite while dialing calls	3.18
ACW-23852	Avaya Workplace for Windows installed	Echo is heard from Workplace Windows when internal mic/Speaker is used in call	3.24
ACW-23773	Avaya Workplace for Windows installed	Workplace user needs to enter Agent password though it is set as Blank on CM, password field	3.24
ACW-23782	Avaya Workplace for Windows installed	Workplace ignores Notify for a SAC activated for other extension, hence while deactivating, the feature does not work as expected	3.24
ACW-23626	Avaya Workplace for Windows installed	Feedback to improve User experience when LDAP password is changed and Workplace logged in and minimizes the client- Error is not displayed for few seconds	3.23
ACW-23858	Avaya Workplace for Windows installed	Workplace keeps asking for Proxy Authentication for connecting to Outlook Add-In walled garden config	3.22
ACW-23787	Avaya Workplace for Windows installed	Unable to merge call using Drag-Drop contact from Fav or Contacts tab onto Active call- Seen with one extension	3.21
ACW-23776	Avaya Workplace for Windows installed	Workplace do not apply 'APPLICATION_SCREEN_POP_RULE' parameter, user need to restart Workplace one more time	3.24
ACW-22968	Avaya Workplace for Windows installed	Unable to use Workplace as a Media endpoint for 3PCC calls after SM maintenance, Workplace needs to be restarted in order to use it again-	3.18

<b>ID</b>	<b>Minimum Conditions</b>	<b>Visible symptoms</b>	<b>Release found in</b>
<b>ACW-23060</b>	Avaya Workplace for Windows installed	VoIP service is not recovered when DSL Link is re-establish next working day	3.17
<b>ACW-23802</b>	Avaya Workplace for Windows installed	IM messages sent from Workplace user with special character or New line character did not successful, user has to again send these messages for successful conversation	3.13
<b>ACW-23700</b>	Avaya Workplace for Windows installed	Cannot access user profile with Outlook plugin	3.23.1
<b>ACW-23716</b>	Avaya Workplace for Windows installed	Incoming call notification displayed with 2 to 3 seconds delay for the first call after client restarted	3.23.1
<b>ACW-23755</b>	Avaya Workplace for Windows installed	User is allowed to close Meeting Roster window; later user cannot open the roster by any means. User's audio and video was transmitted to other participants	3.24
<b>ACW-23754</b>	Avaya Workplace for Windows installed	Caller ID is not displayed for Incoming VDN Calls	3.24
<b>ACW-23801</b>	Avaya Workplace for Windows installed	Unable to merge two calls using secretary extension though it has 2 lines for the boss	3.24
<b>ACW-23720</b>	Avaya Workplace for Windows installed	Delegate meetings configured from Outlook Add-In for shared calendars do not get added to iView future calendar meetings	3.23
<b>ACW-23622</b>	Avaya Workplace for Windows installed and logged in other phone mode	Workplace in Other Phone mode and SendAllCalls active with PSTN still redirect a call	3.23
<b>ACW-23706</b>	Avaya Workplace for Windows installed and logged in other phone mode	No Call leg initiated, when Workplace user in other phone mode	3.23
<b>ACW-23694</b>	Avaya Workplace for Windows installed	Sign Out option under User Avatar intermittently missing after multiple steps	3.23
<b>ACW-23646</b>	Avaya Workplace for Windows installed	Google Meet link does not display with Join in Workplace	3.23
<b>ACW-23639</b>	Avaya Workplace for Windows installed with enabled Browser add-in	Country selection screen for Avaya Browser extension opens at the top right corner and not near the cursor	3.23
<b>ACW-23670</b>	Avaya Workplace for Windows installed	Workplace do not display Caller name and number for VDN routed call	3.23
<b>ACW-23710</b>	Avaya Workplace for Windows installed	Bridge Appearance does not display on Button Module for a Bridged call	3.22
<b>ACW-23631</b>	Avaya Workplace for Windows installed	Error email displayed when user trying to schedule meeting using Outlook Add-In and reserve the meeting- Error displayed is for 'Virtual Room conflict	3.21
<b>ACW-23536</b>	Avaya Workplace for Windows installed	Caller number is displayed instead of caller name for VDN call)	3.21
<b>ACW-23695</b>	Avaya Workplace for Windows installed	Not able to login with Meeting scheduler using Outlook Add-In	3.21

ID	Minimum Conditions	Visible symptoms	Release found in
ACW-23485	Avaya Workplace for Windows installed	VDN name is not displayed in Desk phone mode for incoming VDN calls	3.21
ACW-23601	Avaya Workplace for Windows installed	Unable to input special character @ with German keyboard	3.23.1
ACW-23531	Avaya Workplace for Windows installed	German Umlaut problem in audio video setting	3.22
ACW-23567	Avaya Workplace for Windows installed	Workplace windows shows ? for some of the German characters in Audio/Video setting	3.22
ACW-23572	Avaya Workplace for Windows installed	Numbers on the web site/web page are still highlighted though the Site is added in blocked list for highlighting numbers	3.22
ACW-23581	Avaya Workplace for Windows installed	Team Button is not displayed on button list if the same monitored station is also added with Call Forward feature	3.22
ACW-23365	Avaya Workplace for Windows installed	Removal Conference Passcode from the logs	3.21
ACW-23623	Avaya Workplace for Windows installed	Shared Control with VDI does not work, Paired Sign On failed intermittently	3.22
ACW-23539	Avaya Workplace for Windows installed	MWI does not work when user register with E164 handle	3.21
ACW-23487	Avaya Workplace for Windows installed	User cannot open menu from Presence status indicator/User Dashboard if 'ENABLE_TOP_OF_MIND' is set to 0	3.21
ACW-23605	Avaya Workplace for Windows installed	Unable to resize Roster from 3.21	3.21
ACW-23540	Avaya Workplace for Windows installed logged with VDI client in Deskphone mode	Paired Sign On does not work between Workplace and VDI client for Deskphone mode	3.20
ACW-23442	Avaya Workplace for Windows installed, and Agent logged in	Service Observe feature does not work in My Computer mode when Agent extension used is too long	3.21
ACW-23390	Avaya Workplace for Windows installed	Config updates restart client and apply the changes without allowing user to not apply the updates	3.20
ACW-23469	Avaya Workplace for Windows installed	Screen pop after transfer shows UCID for second call and not the original first call at transfer target	3.21
ACW-23413	Avaya Workplace for Windows installed	AMM/PMM messages are recorded in WMA format which cannot be open/played on iOS	3.21
ACW-23475	Avaya Workplace for Windows installed	Screen pop up for a BLA answered call does not show UCID associated with call	3.21
ACW-23331	Avaya Workplace for Windows installed	New Conversation and call buttons are not displayed if Workplace is moved to a dual monitor with resolution of 2560x1440	3.20
ACW-23211	Avaya Workplace for Windows installed in Other Phone Mode	Workplace in Other Phone Mode with SAC activated, still rings on the other phone configured and cancels within 1 sec,	3.20

ID	Minimum Conditions	Visible symptoms	Release found in
		unnecessary calls on other phone when SAC is activated in Other phone mode	
ACW-23192	Avaya Workplace for Windows installed	Workplace crashes when user tries to login with a specific extension with specific virtual address	3.22
ACW-23420	Avaya Workplace for Windows installed.	Update documentation for deploying Client Identity certificate to user's personal store.	3.22
ACW-23355	Avaya Workplace for Windows installed.	HTTP Headers JSESSIONID and JSESSIONIDSSO are displayed in log files.	3.21
ACW-23294	Avaya Workplace installed.	EWS Calendar service is requesting full user access for calendar instead of Read access only.	3.20
ACW-23319	Workplace is deskphone mode with 96x1. ENFORCE_SIPS_URI is set to 0.	Unable to initiate call in Deskphone mode from dial pad, Call log or Contact search	3.20
ACW-23251	Avaya Workplace for Windows installed with browser add-in enabled.	Click to Dial Browser extension is not available with MS Edge browser	3.20
ACW-23261	Avaya Workplace for Windows installed one of the services (Portal service) is de-commissioned from the deployment	Authorization with some services failed though the credentials are correct and accepted when one of the services (Portal service) is de-commissioned from the deployment	3.20
ACW-23163	Avaya Calling installed, try searching by Phone number in the Enterprise search for Avaya Contacts and Favorites	Enterprise contacts are not displayed in search result when user enter number with spaces on Avaya Calling.	1.2
ACW-22903	Avaya Calling installed.	Insufficient logging in Avaya Call App for O365 contact related issues and some of the failures.	1.2
ACW-22902	Avaya Calling installed, try searching with exact strings in the Local search for Avaya Contacts and Favorites	User needs to enter complete and exact string to get the contact	1.2
ACW-22819	Avaya Calling installed, try searching by Phone number in the Local search for Avaya Contacts and Favorites	Phone number search for local contacts only works with exact number format	1.1

## Appendix A: Acronyms

Acronym	Definition
3PCC	Third Party Call Control
AAC	Avaya Aura® Conferencing
AADS	Avaya Aura® Device Services
AAWG	Avaya Aura® Web Gateway
AEMO	Avaya Equinox® Meetings Online
AMM	Avaya Multimedia Messaging
APNS	Apple Push Notification Service

<b>ASBCE</b>	Avaya Session Border Controller for Enterprise
<b>BLA</b>	Bridged Line Appearance
<b>CM</b>	Avaya Aura® Communication Manager
<b>EC500</b>	Extension to Cellular
<b>FIPS</b>	Federal Information Processing Standards
<b>FP</b>	Feature Pack
<b>GA</b>	Generally Available
<b>IdP</b>	Identity Provider
<b>IM</b>	Instant Message
<b>IPv6</b>	Internet Protocol version 6
<b>IX</b>	Intelligent Experience
<b>LDAP</b>	Lightweight Directory Access Protocol
<b>MDA</b>	Multiple Device Access
<b>MSS</b>	Multi-Stream Switching
<b>OAUTH</b>	Open Authorization
<b>OTT</b>	Over The Top
<b>PLC</b>	Packet Loss Concealment
<b>POM</b>	Presentation Only Mode
<b>PS</b>	Avaya Aura® Presence Services
<b>SAML</b>	Security Assertion Mark-up Language
<b>SBC</b>	Session Border Controller
<b>SIP</b>	Session Initiation Protocol
<b>SM</b>	Avaya Aura® Session Manager
<b>SMGR</b>	Avaya Aura® System Manager
<b>SP</b>	Service Pack
<b>SRTP</b>	Secure Real-Time Transport Protocol
<b>SSO</b>	Single Sign-On
<b>TOM</b>	Top of Mind
<b>TLS</b>	Transport Layer Security
<b>UC</b>	Unified Communication
<b>URI</b>	Uniform Resource Identifier
<b>USB</b>	Universal Serial Bus
<b>VDI</b>	Virtual Desktop Infrastructure