Using Avaya 9621G/9641G IP Deskphones SIP for Call Center Agents

Release 6.5
Issue 1
January 2015

© 2014 Avaya Inc.

All Rights Reserved.

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Note

Using a cell, mobile, or GSM phone, or a two-way radio in close proximity to an Avaya IP telephone might cause interference.

Documentation disclaimer

“Documentation” means information published by Avaya in varying mediums which may include product information, operating instructions and performance specifications that Avaya may generally make available to users of its products and Hosted Services. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of documentation unless such modifications, additions, or deletions were performed by Avaya. End User agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on Avaya hardware and software. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya’s standard warranty language, as well as information regarding support for this product while under warranty is available to Avaya customers and other parties through the Avaya Support website: http://support.avaya.com or such successor site as designated by Avaya. Please note that if you acquired the product(s) from an authorized Avaya Channel Partner outside of the United States and Canada, the warranty is provided to you by said Avaya Channel Partner and not by Avaya.

Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, HTTP://SUPPORT.AVAYA.COM/LICENSEINFO OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM AVAYA INC., ANY AVAYA AFFILIATE, OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AVAYA CHANNEL PARTNER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA CHANNEL PARTNER; AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS “YOU” AND “END USER”), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE (“AVAYA”).

Avaya grants you a license within the scope of the license types described below, with the exception of Heritage Nortel Software, for which the scope of the license is detailed below. Where the order documentation does not expressly identify a license type, the applicable license will be a Designated System License. The applicable number of licenses and units of capacity for which the license is granted will be one (1), unless a different number of licenses or units of capacity is specified in the documentation or other materials available to you. “Software” means Avaya’s computer programs in object code, provided by Avaya or an Avaya Channel Partner, whether as stand-alone products, pre-installed , or remotely accessed on hardware products, and any upgrades, updates, bug fixes, or modified versions thereto. “Designated Processor” means a single stand-alone computing device. “Server” means a Designated Processor that hosts a software application to be accessed by multiple users. “Instance” means a single copy of the Software executing at a particular time: (i) on one physical machine; or (ii) on one deployed software virtual machine (“VM”) or similar deployment.

License types

Designated System(s) License (DS). End User may install and use each copy or an Instance of the Software only on a number of Designated Processors up to the number indicated in the order. Avaya may require the Designated Processor(s) to be identified in the order by type, serial number, feature key, Instance, location or other specific designation, or to be provided by End User to Avaya through electronic means established by Avaya specifically for this purpose.

Shrinkwrap License (SR). You may install and use the Software in accordance with the terms and conditions of the applicable license agreements, such as “shrinkwrap” or “clickthrough” license accompanying or applicable to the Software (“Shrinkwrap License”).

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, Hosted Service, or hardware provided by Avaya. All content on this site, the documentation, Hosted Service, and the Product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, and or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Third Party Components

“Third Party Components” mean certain software programs or portions thereof included in the Software or Hosted Service may contain software (including open source software) distributed under third party agreements (“Third Party Components”), which contain terms regarding the rights to use certain portions of the Software (“Third Party Terms”). As required, information regarding distributed Linux OS source code (for those Products that have distributed Linux OS source code) and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply is available in the Documentation or on Avaya’s website at: http://support.avaya.com/Copyright or such successor site as designated by Avaya. You agree to the Third Party Terms for any such Third Party Components

Preventing Toll Fraud

“Toll Fraud” is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If you suspect that you are being victimized by Toll Fraud and you need technical assistance or support, call Technical Service Center Toll Fraud Intervention Hotline at +1-800-643-2353 for the United States and Canada. For additional support telephone numbers, see

the Avaya Support website: http://support.avaya.com or such successor site as designated by Avaya. Suspected security vulnerabilities with Avaya products should be reported to Avaya by sending mail to: securityalerts@avaya.com.

Trademarks

All non-Avaya trademarks are the property of their respective owners. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Downloading Documentation

For the most current versions of Documentation, see the Avaya Support website: http://support.avaya.com, or such successor site as designated by Avaya.

Contact Avaya Support

See the Avaya Support website: http://support.avaya.com for Product or Hosted Service notices and articles, or to report a problem with your Avaya Product or Hosted Service. For a list of support telephone numbers and contact addresses, go to the Avaya Support website: http://support.avaya.com (or such successor site as designated by Avaya), scroll to the bottom of the page, and select Contact Avaya Support.

Federal Communications Commission (FCC) Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

FCC/Industry Canada Radiation Exposure Statement

This device complies with the FCC's and Industry Canada's RF radiation exposure limits set forth for the general population (uncontrolled environment) and must not be co-located or operated in conjunction with any other antenna or transmitter.

Warning

The handset receiver contains magnetic devices that can attract small metallic objects. Care should be taken to avoid personal injury.

Power over Ethernet (PoE) warning

This equipment must be connected to PoE networks without routing to the outside plant.

『根據交通部低功率管理辦法規定：

第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變

更頻率、加大功率或變更原設計之特性及功能。

第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，

應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信規定作業之無線電信。低功率射頻電機須忍受合法通信或

工業、科學及

醫療用電波輻射性電機設備之干擾。

Contents

Chapter 1: Introduction to the Avaya Call Center agent deskphones 5
Differences between the H.323 and SIP deskphones 5
About Call Center Agent Phone screen 6
Quick Touch Panel options 7
Setting the Quick Touch panel 9
About Agent work modes and states 9
About call center-related icons 10
About Lamp States for Call Center features 12
Agent Status line display combinations for agents 13
About incoming calls 15
About Message Waiting Indicator 17
Chapter 2: Call Center Agent operations 18
About Call Center Agent features 18
About Reason Codes 18
Logging in as an agent 18
Logging out as an agent 20
Activating After Call Work 20
Activating Auxiliary Work 20
Activating Auto In 21
Activating Manual In 22
Activating Logout Override 22
Chapter 3: Call Center Deskphone operations 24
Answering and ending a call 24
Switching to another deskphone during an active call 25
Enabling wireless headset 25
Enabling SAC when DND is active 25
Entering Stroke Counts 26
Entering Call Work Codes 26
Viewing Queue Stats 27
Viewing Vu Stats 28
Activating Supervisor Assist 28
Viewing ASAI UUI 29

Chapter 1: Introduction to the Avaya Call Center agent deskphones

The 9608, 9608G, 9611G, 9621G, and 9641G are multiline deskphones that you can use in a standard office environment or with Avaya Call Center 3.0 or later releases. The 9621G and 9641G deskphones are touch-based phones with a color display. The 9611G, 9608, and 9608G are button-based phones. The 9611G has a color display, while the 9608 has a monochrome display.

You can connect a dual headset adapter to the 9641G, 9608, and 9611G models so that two persons can listen in on calls. You can attach up to three button modules to these models to extend call appearances or features or both.

Additionally, the 9641G deskphone has an optional faceplate designed specifically for using this model in a call center. With these deskphones you can obtain convenient features and capabilities at your fingertips, including a Phone Screen to view and manage your calls, and icons indicating agent status, call states, feature status, queued calls, and missed calls. Using the designated feature buttons, you can change your agent work mode or state with one touch.

Not all functions and features described in this user guide may be available on your deskphone or applicable to the way your call center operates. If you find that a function or feature is not available, contact your supervisor or administrator.

Important:

This guide describes only the features and operation of the 9621G and 9641G deskphones in a call center environment. Specific user guides address standard office deskphone operation and features such as placing calls, reviewing call history, conference calling, and modifying deskphone options and settings for your personal preferences. Depending on which deskphone model you are using, see *Avaya one-X® Deskphone SIP for 9608 and 9611G IP Telephone User Guide* or the *Avaya one-X® Deskphone SIP 9621G and 9641G User Guide for 9600 Series IP Telephones*, available on the Avaya Support Site:http://avaya.support.com.

Differences between the H.323 and SIP deskphones

There are differences between the H.323 deskphones and the SIP deskphones, which include:

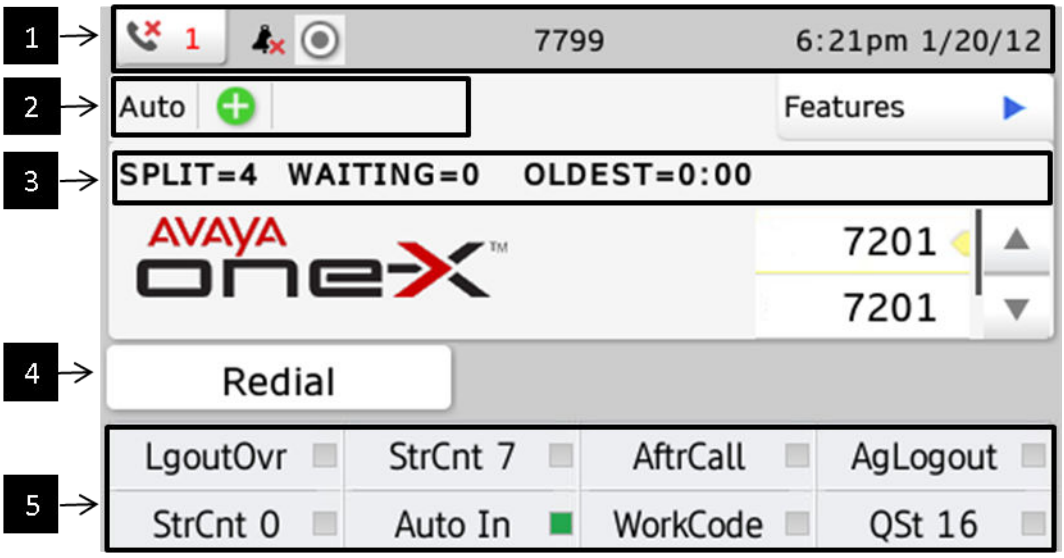
- The Agent Greetings feature is supported by H.323 deskphones, but is currently not available for the 96x1 SIP deskphones. The feature is supported only with phones that use the Avaya one-X® Deskphone H.323 application.

- Call Center features, such as login and logout, function differently with SIP using the advanced capabilities of the SIP architecture.
- If collected digits are available for a call, they appear on the Agent Status line automatically on the SIP deskphones. No action is required on your part.

About Call Center Agent Phone screen


Your Phone screen displays information about your phone and agent settings as well as information about calls.

What is displayed on your Phone screen is dependent on the phone model and what has been configured for your system by your system administrator.



No.	Name	Description
1	Top Line Display	Displays date and time and set information.
2	Agent Status Line	Displays agent information, such as work mode and state, and when provided, collected digits. If collected digits are available with the call, they are displayed without any action on your part. If User-to-User Information (UUI) is associated with the call, it is displayed here when you press the **UUI Info** button.
3	Agent Information Line	Displays Vu Stats information when you press the **Vu Stats** button. When you press the **Queue Stats** button, the Queue Stats information overrides the Vu Stats information. If Interruptible Aux is activated, the Interruptible Aux message is displayed.

No.	Name	Description
4	Softkeys	Tap a softkey to perform that task. The softkeys that are displayed depend on which features are active and whether you are on a call.
5	Quick Touch panel	Tap to access the configured Call Center features. What is displayed here is dependent on a number of factors, including which features are configured, your Agent Status, and how the Quick Touch Panel is configured (not displaying, one line displaying, or two lines displaying).

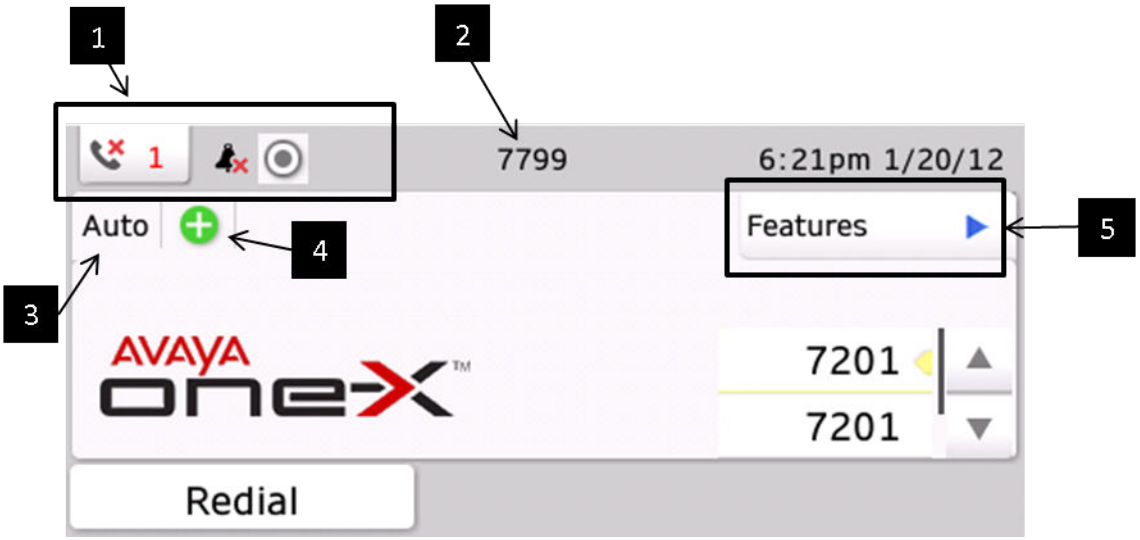




No.	Name	Description
1	Icon area	Displays icons such as Forced Logout, Forced Logout Override, pending state changes, missed calls and phone settings.
2	Agent ID	Displays your Agent ID when you have logged in. The phone extension number is displayed when you are not logged in.
3	Agent Work Mode	Displays your agent work mode: Auto or Manual. No icon is displayed when you are not logged in.
4	Agent State	Displays your agent state as a icon: Available, Auxiliary Work (with or without Reason Code), After Call Work, or On call (ACD or non-ACD). See About call center-related icons on page 10.
5	Features Screen	Tap the button to access the configured Call Center Features.

The Top line display, Agent Status line, and Agent Information line are also visible when viewing the Features screen.

Use Call Center Agent features by tapping **Features**, or by tapping the feature from the Quick Touch panel, if configured.

Quick Touch Panel options

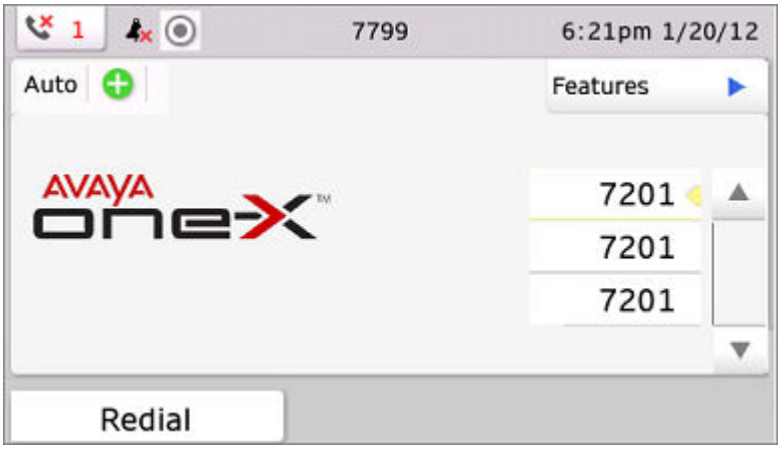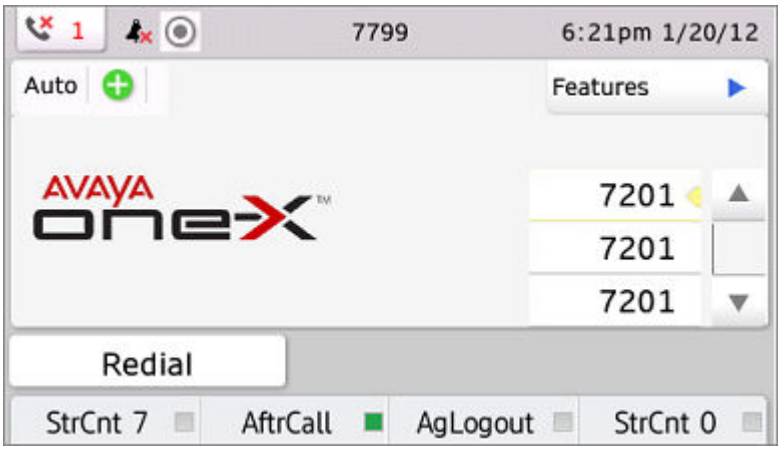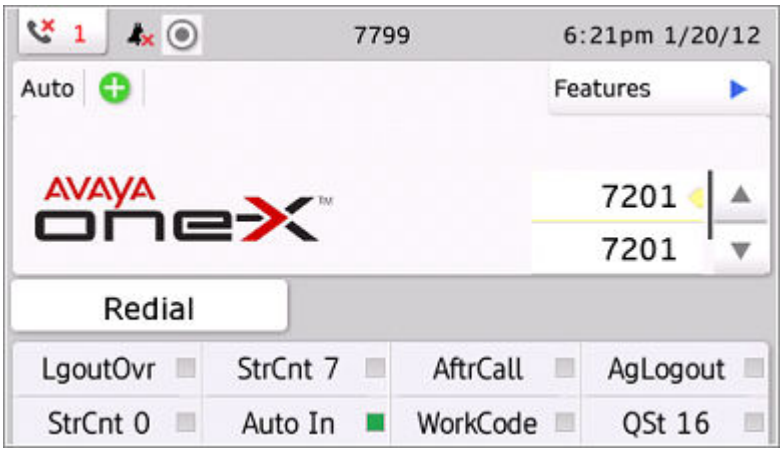You can configure the Quick Touch panel to display one line, two lines, or not to display.

Not displayed	
One line display	
Two line display	

Setting the Quick Touch panel

About this task

When you use the Quick Touch panel, the Phone screen provides access to your features or call appearance buttons at a glance. You can set the Quick Touch Panel to display one or two lines, or not display any lines. Displaying the Quick Touch panel can limit your call appearances display to three lines at a time.

Procedure

1. Press **Home**.
2. Tap **Settings**.
3. Tap **Options & Settings**.
4. Tap **Screen and Sound Options**.
5. On the **Screen and Sounds** menu, tap **Show Quick Touch Panel**, then tap the **Right** softkey to change the setting from 1 Line to 2 Lines, from 2 Lines to 0, or from 0 to 1 Line.
6. Tap **Save** to save the setting or **Cancel** to return to the menu without saving.

About Agent work modes and states

When you are logged in as an agent, the Agent Status line shows your current work mode and state.

When logged in, the agent work modes are **Auto In** and **Manual In**.

The agent states are:

State	Description
Available	This state is automatically assigned when you are available to receive ACD calls. With Auto In, you are returned to Available after each call is released. With Manual In, you must tap Manual In to return to the available state.
Aux Work	You are placed in the Auxiliary Work state after agent login without a specified work mode. You must change to Auto In or Manual In work mode to become available to receive incoming call center calls and to select your mode of operation. You can change back to Auxiliary Work to indicate you are not available to receive call center calls; for example, when you want to take a break. Depending on how your system is administered, you might be prompted to enter a Reason Code when changing to Aux Work
After Call Work	Switch to ACW to perform after-call work, such as completing a call-related form. The call distribution system automatically changes your agent state to ACW if you are in Manual-In mode.


State	Description
	You may also enter this state automatically when you are in Auto-In mode, if your system administrator has configured automatic ACW for a preset time period after call completion.
On Call	This state is automatically assigned when you are active on a call. If you are active on an ACD call, the "**On-ACD Call**" icon is displayed; otherwise, the "**On non-ACD Call**" icon is displayed.
Forced Logout	This state is assigned at a specified time determined by your system administrator. The Forced Logout icon is displayed on the top line only if the administrator has assigned a logout time for you. If you are not on a call, you are logged out of the ACD regardless of which agent state you are in.
Logout Override	You can invoke this state if you want to continue working after your scheduled logout time. The Logout Override icon is displayed on the top line only if you have invoked to override the administered Forced Logout before the scheduled time.

Pending states are assigned whenever you request a state change while active on a call. For example, you request to change to an Aux Work state while active on a call. When the call is released, the pending state change become effective immediately.

About call center-related icons

What you see on the Deskphone display depends on the features that are provisioned for your Deskphone.

Icon	Icon name	Where it appears	Description
	After Call Work	Agent Status line	The Deskphone displays this icon when you activate ACW. Use this state when you are performing any after call-related work, such as filling in paperwork after an ACD call.
	Pending ACW	Top Line display	The Deskphone displays this icon when you activate ACW when you are active on a call.
	Aux Work	Agent Status line	The Deskphone displays this icon when you activate Aux Work. Enter this state when you are performing non-ACD activities such as taking a break, or placing an outgoing call. You may need to enter a Reason Code for entering the Aux Work state if this requirement is configured by your system administrator.
	Pending Aux	Top Line display	The Deskphone displays this icon when you activate Aux Work while you are active on a call.

Icon	Icon name	Where it appears	Description
	Available	Agent Status line	You are available for any incoming call. The Deskphone displays this icon when you are not active on a call, in ACW, or in Aux Work.
	Pending Available	Top Line display	The Deskphone displays this icon when you are changing your state to Available from Aux Work or ACW and you are active on a call.
	Forced Logout	Top Line display	The Deskphone displays this icon when Forced Logout is active for your Agent ID.
	Forced Logout Override	Top Line display	The Deskphone displays this icon if you activate Forced Logout Override.
	Pending Logout	Top Line display	The Deskphone displays this icon if you press the Log Out button while you are active on a call or when the Forced Logout time arrives and you are active on an ACD call.
	Alerting icon	Agent Status line	The Deskphone displays this icon when you receive an incoming call. When you receive an ACD or DAC call, the icon displays the respective text, ACD or DAC, horizontally beside the bell.
	On call	Agent Status line	The Deskphone displays this icon when you are active on a call. When you receive an ACD or DAC call, the icon displays the respective text, ACD or DAC, horizontally. If you are active on an ACD call, the On ACD call icon is displayed, otherwise, the On non-ACD call icon is displayed.
	Held call	Agent Status line	The Deskphone displays this icon when you have placed a call on hold. When you place an ACD or DAC call on hold, the icon displays the respective text, ACD or DAC, vertically.
	Queue Stats	Agent Information line	The Deskphone displays this icon when you activate Queue Stats. The clock icon appears before the oldest call time and the calls icon appears before the number of calls in the queue.
	Time in Queue Threshold warning	Queue Stats feature button	The Deskphone displays this icon to indicate when the time threshold for the oldest call in the queue has been reached.
	Call threshold warning	Queue Stats feature button	The Deskphone displays this icon when the number of calls in the queue has reached the maximum configured by your system administrator.

Icon	Icon name	Where it appears	Description
	UUI icon	Agent Status line	If an incoming call has UUI information, the UUI feature button lamp is solid. When you tap the feature, or press the button associated with this feature, the Deskphone displays this icon before the UUI information.
	Collected Digits Information	Agent Status line	If the incoming call has collected digits information, the Deskphone displays this icon before the digits. Collected digits are digits that the caller entered before reaching you.

About Lamp States for Call Center features

Call center features that are associated with an administered feature button display different lamp states, indicating the status of the feature.

Lamp State	Feature Status
Dark 	Off
Steady 	On
Wink 	Pending state change
Flash 	• Prompt to enter Reason Code or • Indicates a threshold has been reached
Flutter 	Displayed during a number of feature states, including: • On call, or in Aux, or ACW with DAC call waiting. • Pending Logout • Stroke count was entered while you are in an invalid state • Call Work Code entered while you are in an invalid state

Agent Status line display combinations for agents

What you see on the Agent Status line of the screen depends on what you are doing at the time (your agent work mode) and whether you are idle or have an active, held, or incoming call.

In the following example, the Agent Status line indicates you are in Auto In mode and there is an incoming DAC call.



Use this chart as a guide to possible agent status line display combinations.

- ACD=Automatic Call Distribution
- ACW=After Call Work
- Auto=Auto In
- Aux=Auxiliary Work state
- DAC=Direct Agent Call
- Man=Manual In
- RC=Reason Code #

Agent Work Mode shows	Agent Status shows	Icon area shows	What this means:
Auto or Man			You are ready to receive DAC or ACD calls.
Auto or Man	Incoming 		You have an incoming non-ACD or non-DAC call.
Auto or Man	Incoming-ACD 		You have an incoming ACD call.
Auto or Man	Incoming-DAC 		You have an incoming DAC call.
Auto or Man	On-ACD 		You are on an ACD call.
Auto or Man	On-ACD 		A DAC call is waiting in the queue while you are on an ACD call.

Agent Work Mode shows	Agent Status shows	Icon area shows	What this means:
Auto or Man	On-DAC 		You are on a DAC call.
Auto or Man	On-DAC 		A DAC call is waiting in the queue while you are on a DAC call.
Auto or Man	Hold 		You have a non-ACD, non-DAC call on hold.
Auto or Man	Hold 		A DAC call is waiting in the queue while you have a non-ACD, non-DAC on hold.
Auto or Man	On-ACD-Hold 		You have an ACD call on hold.
Auto or Man	On-ACD-Hold 		A DAC call is waiting in the queue while you have an ACD call on hold.
Auto or Man	On-DAC-Hold 		You have a DAC on hold.
Auto or Man	On-DAC-Hold 		A DAC call is waiting in the queue while you have a DAC on hold.
Auto or Man	Aux or Aux RC  (RC if applicable)		You are performing auxiliary work and not available to receive DAC or ACD calls. **Note:** If you have just logged in as an agent, the work mode is blank.
Auto or Man	Aux or Aux RC  (RC if applicable)		A DAC call is waiting in the queue while you are performing auxiliary work and not available to receive DAC or ACD calls. **Note:** If you have just logged in as an agent, the work mode is blank.
Auto or Man	ACW		You are performing after call work and not available to receive DAC or ACD calls.

Agent Work Mode shows	Agent Status shows	Icon area shows	What this means:
			
Auto or Man	ACW 		A DAC call is waiting in the queue while you are performing after call work and not available to receive DAC or ACD calls.
Auto or Man	On-ACD  or On-DAC 	Aux Pend or Aux RC Pend 	You are active on a call, are switching into Aux state, and have no incoming or pending calls.
Auto or Man	On-ACD  or On-DAC 	Aux Pend or Aux RC Pend  	You are active on a call, a DAC call is waiting in the queue while you are switching into Aux state. **Note:** If you put a call on hold, then the Agent Status line displays the On-hold icon.
Auto or Man	On-ACD  or On-DAC 	ACW Pend 	You are active on a call, you are switching into ACW state, and have no incoming or pending calls.
Auto or Man	On-ACD  or On-DAC 	ACW Pend  	You are active on a call and a DAC call is waiting in the queue while you are switching into ACW state. **Note:** If you put a call on hold, then the Agent Status line displays the On-hold icon.

About incoming calls

What information is displayed for an incoming call is dependent on the call type and what has been configured for your system.

VDN information

Depending on how vector programming is configured for your system, incoming calls may traverse multiple VDNs (Vector Directory Number) or they may stay within the original VDN that received them.

Note:

A Vector Directory Number (VDN) is a contact number in CM that is, in general, used as a point of entry of a call into a Call Center. In many cases, it is the mapping of an 1–800 telephone number that a caller dials to access the services provided by a Call Center.

If the calls traverse multiple VDNs, one of these VDNs is configured as the active VDN for the call. The active VDN controls what information is displayed on the Deskphone that receives the call.

Your Deskphone displays the following information: “caller_ID info→ VDN_name”, where “caller_ID info” is the calling party identification, if available, and “VDN_Name” is the administered name of the active VDN before delivery to you. The active VDN for an unanswered redirected call, along with a Call Redirected (CR) indicator, is displayed for an incoming call, as is the case for calls that are received from Routing On No Answer (RONA) redirection..



ASAI UUI

When you receive a call with User-to-User Information (UUI), the UUI Info feature button is lit on the Deskphone screen. When you press the UUI Info key, the UUI icon is displayed, followed by the UUI information. The UUI icon is used to distinguish UUI information from other call information, such as collected digits.

Collected digits

If collected digits are associated with the incoming call, the digits are displayed on the Agent Status line, without requiring any action on your part. The Info icon is displayed, followed by the collected digits information.

When this information is cleared from the Agent Status line is dependent on your system configuration.

Incoming call ring alert type

- All internal ACD or DAC calls rings with an internal alert type.
- All external ACD or DAC calls rings with an external alert type.
- All internal ACD or DAC priority calls rings with a priority alert type.
- All phones while receiving a supervisor assist call rings with priority alert.

About Message Waiting Indicator

An illuminated red LED in the upper-right corner of your deskphone and the Message Button on the deskphone faceplate indicate you have unopened voice mail messages. If Visual Alerting is enabled, the corner LED also flashes when you receive an incoming call. Depending on your system configuration, the message waiting indicators indicate messages either for the deskphone extension, or for the Agent LoginID after agent login. When configured for Agent LoginID, the message waiting indications are for the agent when the agent is logged in. Immediately after agent login, the screen displays `MWI is indicated for the Agent ID` or `MWI is indicated for the extension`.

Your deskphone can also be configured to indicate when other extensions have unopened voice mail messages, using the lamp indication of specific Message Waiting Indicator (MWI) feature buttons defined for each extension to be monitored. If your administrator has enabled this feature, the button lamp is green and the touchscreen displays an open envelope icon when there are unopened messages for the configured extensions on your deskphone.



When all messages are cleared, the touchscreen displays a close envelope icon.



Chapter 2: Call Center Agent operations

About Call Center Agent features

Most Call Center features are provisional and configured by your system administrator. You may not see all the features described in the next two chapters.

The feature name that is displayed on your deskphone is dependent on your deskphone display settings and where on the display the feature is appearing.

You can gain access to the Call Center Agent features from:

- Quick Touch panel
- Features list

For the purposes of this user guide, the instructions are based on Features list. To access the features from the Quick Touch panel, simply tap the feature.

About Reason Codes

Some Call Center features, such as Agent Logout and Auxiliary Work state, may require you to enter a Reason Code.

Reason Codes are configured as “Forced” or “Requested”, or “None”. Forced means a Reason Code must be entered and Requested means you can bypass entering a Reason Code.

If your system administrator did not configure Reason Codes, you may not be prompted to enter a Reason Code.

Speak to your system administrator or supervisor for more information about the Reason Codes your system uses.

Logging in as an agent

Before you begin

To log in as an agent, your extension must be registered to the Avaya Aura network and you must have your agent ID and, if required by your system administrator, your password.

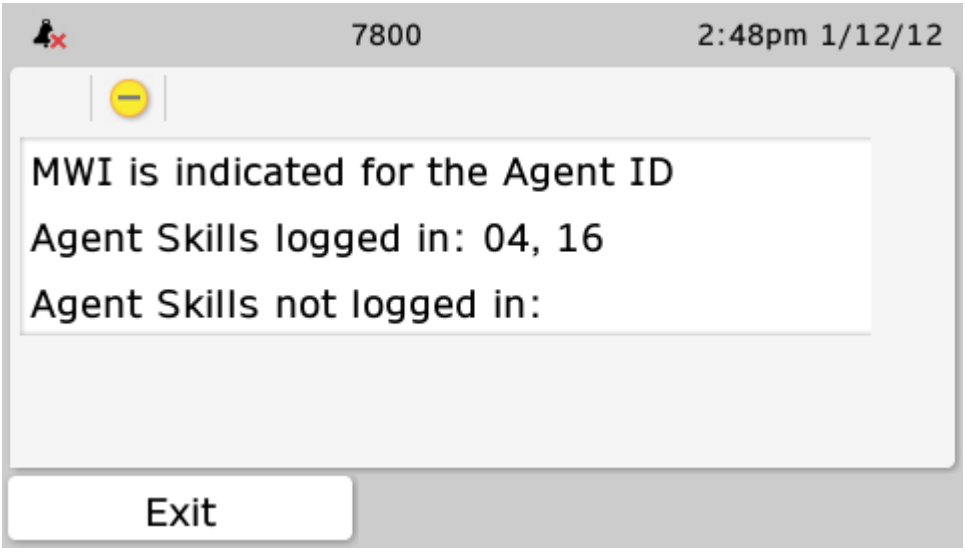
Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Agent Login** using the up or down navigation arrows.
3. Enter your Agent ID.
4. Tap **Enter**.
5. If an agent password has been configured, enter your password. If not, proceed to the following step.
6. Tap **Enter**.

Result

The deskphone displays the following information:

- Whether Message Wait Indicator is configured for your Agent ID, or for the extension
- Which agent skills you are assigned and logged into
- Which agent skills you are assigned, but not logged into, perhaps because that assigned skill has reached a predetermined system limit



Note:

You can view Skills information at any time by tapping the Skills softkey from the Features screen.

Upon log in, your agent state is Aux Work and you do not have a work mode assigned. You must select a work mode to become available.

Upon successful login, the Agent Login feature toggles to the Agent Logout feature.

Note:

If you enter an incorrect password, you hear an error beep and the following error message shows on the display: “Incorrect Login information— Try Again”.

Logging out as an agent

Before you begin

Your system administrator can configure Reason Codes as “Forced” which means a Reason Code must be entered upon Agent Log Out. Speak to your system administrator or supervisor for more information about the Reason Codes your system uses.

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Agent Logout** using the up or down navigation arrows.
3. If configured by your system administrator, enter the Reason Code for logout.
4. Tap **Enter**.

Result

Upon successful logout, the Agent Logout feature toggles to the Agent Login feature.

Activating After Call Work

About this task

You can activate After Call Work at any time while you are logged in as an agent. If After Call Work is activated while on a call, the phone indicates it is pending After Call Work until after your active call is released.

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **After Call Work** using the up or down navigation arrows.
3. Tap **Select**.

Result

The After Call Work icon () appears on the Agent Status Line.

Activating Auxiliary Work

About this task

You can activate the Aux Work state to notify the system that you are unavailable for any call at this moment.

If configured by your system administrator, you may need to specify a reason by entering a Reason Code.

Note:

Your Deskphone supports the Interruptible Aux work feature. If configured for your system, this feature can display messages such as “You are needed” and the system can change your status to Auto or Manual In.

See About Reason Codes on page 18 for more information.

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Aux Work** using the up or down navigation arrows.
3. If optional or forced Reason Codes have been configured by your system administrator, enter the Reason Code .
4. Tap **Select**.

Result

The Aux Work icon () appears on the Agent Status line followed by the Reason Code (if entered), or the Aux Work Pending icon () appears on the Top Line display followed by the Reason Code (if entered).

Note:

You see the Aux Work Pending icon if you activate Aux Work while active on a call. Once the call has been released, you enter the Aux Work state.

Activating Auto In

About this task

The Auto In work mode enables you to go back to the Automatic Call Distribution (ACD) available queue as soon as you end the ongoing call.

Note:

In most configurations, either the Auto In feature or the Manual In feature is available, but not both.

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Auto In** using the up or down navigation arrows.

Result

The Auto and Available () icons appear on the Agent Status line and you are available to take calls.

Activating Manual In

About this task

The Manual-in work mode requires that you press the Manual-in button following each call in order to make yourself available to service the ACD queue.

Note:

In most configurations, either the Auto In feature or the Manual In feature is available, not both.

When you are in Manual In mode, the system automatically changes your status to After Call Work (ACW) as soon as you end the ongoing call. To go back to the ACD available queue, you must again activate Manual In mode.

Note:

Depending on your provisioning, you may be required to enter a Stroke Count or Call Work Code before being allowed to enter the manual-in mode. Contact your supervisor for additional information.

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Manual In** using the up or down navigation arrows.

Result

The Manual and Available icons appear on the Agent Status line.

Activating Logout Override

About this task

If configured by your system administrator, the system automatically logs you out at a predefined time. If you need to continue working after your scheduled time, use the Logout Override feature to disable the automatic logging out.

Note:

You must enable the Logout Override feature before your specified logout time.

If you are active on a call and you have reached the predefined logout time set by your administrator, you hear a beeping sound to indicate logout is pending. You can request logout

override while on the call; the beeping ceases, and you will stay logged in after the call is released.

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Logout Override** using the up or down navigation arrows.

Result

The Logout Override icon () appears on the Top Line Display if activated before the predefined logout time is reached.

Chapter 3: Call Center Deskphone operations

Answering and ending a call

About this task

When you are logged in, available, and receive an incoming ACD call, the phone displays a string of up to 16 digits on the Agent Information line, if collected digits are associated with the call.

Procedure

1. When you receive an incoming call, you can:
   - Tap **Answer** to answer the call.
   - Tap **Ignore** to silence the alerting without answering the call.
2. Tap **Release** to end the ongoing call.

Result

If the incoming call has collected digits information, it is automatically displayed on the Agent Information line. The Information icon () appears before the digits.

If the incoming call has UUI information associated with it, the UUI Info button is lit. When you press the UUI Info button, the Deskphone displays the UUI information on the Agent Information line, with the UUI icon () appearing before the call information. The UUI information replaces the collected digits information for a short period of time before returning to display the collected digits information.

When you receive an incoming call, the Deskphone uses the Vector Directory Number (VDN) name feature and displays certain information about the caller on the Deskphone display screen.

To use a headset to answer the calls, connect the headset to the phone, and press the **Headset** button. The handset is deactivated and the **Headset** button is lit.

Note:

If you press the **End call** softkey to end the call, the light on the headset button might turn off. You can still use the headset to answer the next call.

Switching to another deskphone during an active call

Procedure

1. Answer the incoming call from your deskphone.
2. To switch to the other deskphone, tap **Bridge** on that deskphone.

Enabling wireless headset

About this task

Perform the following procedure to enable a wireless headset to provide alert and receive incoming calls or to only receive incoming calls.

Procedure

1. Press **Home**.
2. Tap **Settings** > **Options & Settings** > **Call Settings** > **Headset Signaling**.
3. Tap to select any of the following options:
   - **Disabled**: Disables the deskphone to headset setting.
   - **Switchhook and Alert**: Activates the headset if you press **Headset**. When the deskphone receives an incoming call, you hear the alert tone in the headset.
   - **Switchhook only**: Activates the headset if you press **Headset**. When the deskphone receives an incoming call, you do not hear the alert tone in the headset.

Enabling SAC when DND is active

About this task

Perform the following procedure to activate the Send All Calls (SAC) feature to redirect calls to the redirection number when you have manually set the presence status to Do Not Disturb (DND). This feature is available only if your administrator configured it for you.

Procedure

1. Press **Home**.
2. Tap **Settings** > **Options & Settings** > **Advanced Options** > **Presence Integration**.
3. Tap **DND affects SAC** to change the value to **Yes**.
4. Tap **Save**.

Entering Stroke Counts

The Stroke Count feature allows your administrator to define up to nine different customer-related events using keys 0 through 9.

Note:

Stroke Count 0 is used for tracking any audio quality issues. It can be entered while in any agent state or work mode as long as you are logged in as an agent.

About this task

Use these pre-defined keys to report the number of times that a particular event occurs. On a single call, you can send any of the configured stroke counts and repeat them as many times as the incident occurs.

To enter a stroke count, you must be logged in and be in one of the following states:

- Active state on an ACD or DAC call
- ACW state after disconnecting from a call
- Timed ACW state after disconnecting from a call

If you are not in any of these states, the Deskphone displays “INVALID STATE” on the Top Line and the Stroke Count information is not sent. As well, the LED associated with this feature or the touch phone equivalent will flutter.

Your Feature screen displays Stroke Count (#), where # is the number from 0 to 9 that your system administrator has defined for specific customer events.

Contact your supervisor or your system administrator for more information about the defined events.

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Stroke Count** using the up or down navigation arrows.

Result

The Stroke Count information is sent to the CC Elite server.

Entering Call Work Codes

About this task

The Call Work Code feature allows you to enter a Call Work Code, if configured by your system administrator. The Call Work Code can be up to 16 digits in length.

To enter Call Work Codes, you must be logged in and be in one of the following states:

- Active on an ACD or DAC call
- ACW state after disconnecting from a call

- Timed ACW state after disconnecting from a call

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Call Work Code** using the up or down navigation arrows.
3. Enter the code.
4. Tap **Enter** or press the **#** key.

Result

The Call Work code is sent to the CC Elite server.

Viewing Queue Stats

About this task

The Queue Stats feature displays the following information on the deskphone screen for 10 seconds:

- The configured name of the skill group associated with the Queue Stats feature button
- Time of the oldest call in queue
- Number of calls in queue

The Queue Stats feature button label is displayed as **Queue Stats** followed by the skill number in brackets; for example, **Queue Stats (4)**.

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Queue Stats** using the up or down navigation arrows.

Result

The Queue Stats are displayed on the Agent Information line.

If VuStats is active when you press the Queue Stats feature, the Deskphone deactivates the VuStats session when Queue Stats are received and the Agent information line is overwritten with the Queue Stats information.

Note:

In addition to the above information displayed by tapping a Queue Stats feature button, the Deskphone also displays icons associated with the feature button, based on queue statistics received from CC Elite, which are associated with the skill assigned to the Queue Stats feature button.

If there is at least one call in the skill queue, the feature lamp state turns solid. If the configured threshold for the number of calls in queue has been reached, the appropriate icon is displayed (). If the configured threshold for the oldest call in queue is reached, the appropriate icon is

displayed (). When either of the threshold conditions are reached, the feature lamp state displays the flutter state.

Viewing Vu Stats

About this task

The VuStats feature allows the Deskphone to display specific reporting details, such as information related to VDNs, Skills, Trunks, or Agents.

The format of the information that the Deskphone displays depends on how your system administrator has administered the format number associated with the feature button. Format numbers supported are 1 to 50. This information is displayed on the Agent Information Line.

If the information exceeds one line, select the Agent Information Line by tapping it, and use the **All** soft key to view the full VuStats information. It is important to note that if the current format number is linked to another format number through format number configuration, then a Next soft key would be displayed when the Agent Information Line is selected while VuStats is being displayed. Use **Next** to view the VuStats information associated with the next format number. Use **ExitVu** on the Agent Information Line to deactivate the VuStats session

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Vu Stats** using the up or down navigation arrows.
3. Tap the VuStats information displayed on the Agent Information line.
4. Enter the resource (Skill, VDN, Agent ID, or Trunk Group) number as prompted by the Deskphone and press **Enter**.
5. Tap **Next** to view the next Vu Stats format, if applicable.
6. Tap **All** to view the Vu Stats on the entire display screen, if the information exceeds one line.
7. Tap **Back** to return to the single line view.
8. Tap **Exit** to deactivate the current Vu Stats session.

Activating Supervisor Assist

About this task

Use the Supervisor Assist feature if you need assistance from your supervisor during a call, or if you are not on a call and need to contact your supervisor. When your supervisor answers the call, you can opt to conference your supervisor with the caller, transfer the ongoing call to your supervisor, or drop your supervisor and go back to the current call.

The Supervisor Assist feature button label displays as **Assist (#)**, where # is the skill number. However, the skill number may be blank. If the skill number is blank, CC Elite determines the appropriate skill number to be associated with the Supervisor Assist call.

Procedure

1. Tap **Features** to access the Features list.
2. From the Features list, tap **Assist** using the up or down navigation arrows.

Result

If you are active on a call, your call is placed on hold while your supervisor is contacted.

After your supervisor answers the call, your display still displays the **Conf** and **Trans** softkeys.

Viewing ASAI UUI

About this task

If the incoming call has UUI information associated with it, the UUI Info feature button is lit. When you press the UUI Info button, the Deskphone displays the UUI information on the Agent Information line, with the UUI icon () appearing before the call information. The UUI information replaces the collected digits information for a short period of time before returning to display the collected digits information.

Procedure

1. Tap the UU Info feature button to view the information associated with the call.
2. If the UUI associated with the call is too long to fit in the screen, tap **Next** to see the entire UUI.
3. Tap **Exit** to clear UUI information from the screen.

Index

A

After Call Work 9, 10
activating 20
pending 10
agent information line 6
agent state 7
agent status line 6
display combinations 13
agent work mode 7, 9
ASAI UUI information 16
Auto in activating 21
Auxiliary Work 9, 10
activating 20
pending 10
Available 9, 11
pending 11

C

call center agent phone screens 6
calls
answering 24
collected digits 12, 16
held 11
incoming 11, 15
in queue 11
releasing 24
threshold warning 11
UUI 12, 16, 29
VDN information 16
Call Work Code
entering 26
collected digits 12, 16, 24
configured features 18

D

display icons 10

E

enable wireless headset 25
Enabling SAC when DND is active 25

F

Forced Logout 10, 11
override 10, 11
pending 11

H

H.323 phone differences 5

I

icon area 7

L

lamp states 12
legal notices ....
Log in 18
Log out 20
Logout Override
activating 22

M

Manual In
activating 22
multiple device access 25
MWI, Voicemail 17

O

Options & Settings
setting the Quick Touch panel 9

Q

Queue Stats 11
viewing 27
Quick Touch panel 7
configuring 9

R

reason codes 18
entering 21
RONA information 16

S

skills 19
softkeys 7
Stroke Count 26
zero 26
Supervisor Assist
activating 28
switching deskphone 25

T

top line display 6

U

UUI information 12, 16, 24, 29

V

VDN information 16, 24
Vu Stats
viewing 28

W

wireless headset 25
wireless headset enabling 25